

BME Design-Fall 2022 - SAMUEL BARDWELL

Complete Notebook

PDF Version generated by

MAYA TANNA

on

Dec 13, 2022 @11:13 AM CST

Table of Contents

Project Information	2
Team contact Information	2
Project description	3
Team activities	4
Client Meetings	4
9/19/22 Initial Client Meeting	4
Advisor Meetings	5
9/16/22 - Advisor Meeting	5
9/23/22 - Advisor Meeting	6
10/14/22 - Advisor Meeting	7
10/21/22 - Advisor Meeting	8
10/28/22 - Advisor Meeting #5	9
11/14/22 Advisor Meeting 6	10
11/18/22 Advisor Meeting	11
12/2/22 Advisor Meeting	12
Design Process	13
9/28/22: CO2 Valve Design Matrix	13
Materials and Expenses	14
First Materials Purchasing Order	14
Final Expenses	16
Project Final Design	17
Fabrication	17
Standards/Specifications	17
10/20/22 - Relay Schematic	18
10/24/22 Testing Lid Fabrication	19
10/26/2022 CO2 Regulation System	23
11/10/22 - CO2 Regulation Feedback Testing	25
11/15/22 Wiper Fabrication	27
11/17/22 FINAL CO2 AND SOLENOID CODE - Copy	33
Testing and Results	35
Protocols	35
Anti-Fog Protocol	35
Cell Confluency Protocol	36
Homogeneity Protocol	37
Temperature and Humidity Protocol	38
CO2 Sensor Protocol	39
Optical Testing Protocol	40
Recovery Testing Protocol	41
Experimentation	42
10/26/22 Flow Rate Testing	42
11/2/22 Temperature Homogeneity Testing	44
11/7/22 Temperature and Humidity Homogeneity Testing	47
11/20/22 CO2 Sensor Evaluation	49
11/30/2022 CO2 Testing via Solenoid Valve	51
10/10/22: Cell Confluency Test Protocol - Control (Completed)	52
12/5/22 - 12/6/22 Live Cell Testing	53

12/12/22 Optical Testing	58
12/12/22 Anti-Fog Testing	60
Project Files	64
Fall 2021	64
Client Meetings	64
09/17/2021 Client Meeting #1 Introductions to Client/Project Details	64
09/28/2021 Client Meeting #2 Collecting Dimensions and Clarifying Project Details	67
11/02/2021 Client Meeting #3 Fabrication Updates	69
Advisor Meetings	71
09/17/2021 Advisor Meeting #1	71
09/24/2021 Advisor Meeting #2	73
10/01/2021 Advisor Meeting #3	75
10/08/2021 Advisor Meeting #4	77
10/22/2021 Advisor Meeting #5	78
11/12/2021 Advisor Meeting #6	79
11/19/2021 Advisor Meeting #7	80
12/03/2021 Advisor Meeting #8	81
Team Meetings	82
09/20/2021 Team Meeting #1 Working/Finalizing PDS	82
09/27/2021 Team Meeting #2 Design Idea Brainstorm	83
10/04/2021 Team Meeting #3 Finalizing Design Matrix	84
10/11/2021 Team Meeting #4 Finalizing Presentation/Organizing Subcommittees	86
10/18/2021 Team Meeting #5 Materials Purchasing Organization/Final Edits on Preliminary Report	87
10/18/21 TeamLab Meeting Summary	88
10/23/2021 Ace Hardware Visit	89
11/05/2021 Show and Tell Feedback	90
Design Process	91
09/28/2021 Design Matrix	91
10/19/21 Preliminary SolidWorks Incubator Design	93
11/05/2021 Show and Tell Preparations	96
Materials and Expenses	97
10/18/2021 - Future Expenses Table	97
12/06/2021 - Expenses Table	98
Fabrication	99
11/29/2021 Box Fabrication: 3D Print	99
11/29/2021 Hardware Setups	101
12/07/2021 Incubator Fabrication	104
Testing and Results	109
Protocols	109
11/01/2021 Testing Protocols Initial Draft	109
11/15/2021 Incubator User Manual	110
11/19/2021 Testing Protocols Final Version	111
Experimentation	112
12/03/2021 CO2	112
12/03/2021 Thermistor	113
12/03/2021 Humidity	114
12/05/2021 Optical Testing	116
12/07/2021 Attempted Incubator Testing	117
Project Files	119
09/24/2021 Product Design Specifications	119
09/27/2021 Design Matrix	120
10/15/2021 Preliminary Presentation	121
10/19/2021 Preliminary Report	122
12/10/2021 Final Poster Presentation	123
Progress Reports	124
09/15/2021 Progress Report 1	124
09/23/2021 Progress Report 2	125
09/30/2021 Progress Report 3	126
10/07/2021 Progress Report 4	127
10/14/2021 Progress Report 5	128
10/21/2021 Progress Report 6	129

10/28/2021 Progress Report 7	131
11/04/2021 Progress Report 8	132
11/11/2021 Progress Report 9	133
11/18/2021 Progress Report 10	134
12/02/2021 Progress Report 11	135
12/09/2021 Progress Report 12	136
Spring 2022	137
Client Meetings	137
02/02/2022 Client Meeting #1 Notes	137
Advisor Meetings	139
02/04/2022 Advisor Meeting #1 Notes	139
02/11/2022 Advisor Meeting #2 Notes	140
04/08/2022 Advisor Meeting #3 Notes	141
04/15/2022 Advisor Meeting #4	142
Design Process	143
Previous Semester's Work	143
Team activities	143
Client Meetings	143
09/17/2021 Client Meeting #1 Introductions to Client/Project Details	143
09/28/2021 Client Meeting #2 Collecting Dimensions and Clarifying Project Details	146
11/02/2021 Client Meeting #3 Fabrication Updates	148
Advisor Meetings	150
09/17/2021 Advisor Meeting #1	150
09/24/2021 Advisor Meeting #2	152
10/01/2021 Advisor Meeting #3	154
10/08/2021 Advisor Meeting #4	156
10/22/2021 Advisor Meeting #5	157
11/12/2021 Advisor Meeting #6	158
11/19/2021 Advisor Meeting #7	159
12/03/2021 Advisor Meeting #8	160
Team Meetings	161
09/20/2021 Team Meeting #1 Working/Finalizing PDS	161
09/27/2021 Team Meeting #2 Design Idea Brainstorm	162
10/04/2021 Team Meeting #3 Finalizing Design Matrix	163
10/11/2021 Team Meeting #4 Finalizing Presentation/Organizing Subcommittees	165
10/18/2021 Team Meeting #5 Materials Purchasing Organization/Final Edits on Preliminary Report	166
10/18/21 TeamLab Meeting Summary	167
10/23/2021 Ace Hardware Visit	168
11/05/2021 Show and Tell Feedback	169
Design Process	170
09/28/2021 Design Matrix	170
10/19/21 Preliminary SolidWorks Incubator Design	172
11/05/2021 Show and Tell Preparations	175
Materials and Expenses	176
10/18/2021 - Future Expenses Table	176
12/06/2021 - Expenses Table	177
Fabrication	178
11/29/2021 Box Fabrication: 3D Print	178
11/29/2021 Hardware Setups	180
12/07/2021 Incubator Fabrication	183
Testing and Results	188
Protocols	188
11/01/2021 Testing Protocols Initial Draft	188
11/15/2021 Incubator User Manual	189
11/19/2021 Testing Protocols Final Version	190
Experimentation	191
12/03/2021 CO2	191
12/03/2021 Thermistor	192
12/03/2021 Humidity	193
12/05/2021 Optical Testing	195
12/07/2021 Attempted Incubator Testing	196

Project Files	199
09/24/2021 Product Design Specifications	199
09/27/2021 Design Matrix	200
10/15/2021 Preliminary Presentation	201
10/19/2021 Preliminary Report	202
12/10/2021 Final Poster Presentation	203
Progress Reports	204
09/15/2021 Progress Report 1	204
09/23/2021 Progress Report 2	205
09/30/2021 Progress Report 3	206
10/07/2021 Progress Report 4	207
10/14/2021 Progress Report 5	208
10/21/2021 Progress Report 6	209
10/28/2021 Progress Report 7	210
11/04/2021 Progress Report 8	211
11/11/2021 Progress Report 9	212
11/18/2021 Progress Report 10	213
12/02/2021 Progress Report 11	214
12/09/2021 Progress Report 12	215
2/10/22 PDS	216
2/15/22 Design Matrices	217
4/24/22 Final Design SOLIDWORKS Files	218
4/29/22 Final CO2 Design SOLIDWORKS and testing setup	221
Materials and Expenses	224
3/9/2022 Materials Purchasing Request	224
3/22/2022 UW Makerspace Expenses	225
5/3/2022 Final Expenses	226
Fabrication	228
3/22/22 Laser Cut HDF Prototype	228
3/30/22 Copper Tubing Fabrication	230
4/11/2022 Incubation Chamber Fabrication	231
4/19/22 Final Design Fabrication	234
Testing and Results	237
Protocols	237
4/10/2022 Testing Protocols	237
5/3/2022 Testing Protocol Template Revisions	238
Experimentation	239
3/24/2022 Optical Testing	239
3/30/22 Flow Rate Experiment	240
4/5/2022 Humidity Testing	241
4/5/2022 Temperature Testing (along with incubator Humidity Testing)	242
4/21/2022 Whole Incubator Temperature and Humidity Testing	244
4/21/2022 Completed Arduino Code	247
4/26/2022 Recovery Testing	250
Project Files	253
2/25/22 PDS	253
2/25/22 Preliminary Presentation Slides	254
3/1/22 Preliminary Report	255
04/09/2022 Executive Summary Draft	256
4/26/2022 Final Poster	257
5/3/22 Final Report	258
Progress Reports	259
2/3/2022 Progress Report 1	259
2/10/2022 Progress Report 2	260
2/17/2022 Progress Report 3	261
2/24/2022 Progress Report 4	262
3/3/2022 Progress Report 5	263
3/10/2022 Progress Report 6	264
3/24/2022 Progress Report 7	265
3/31/2022 Progress Report 8	266
4/7/2022 Progress Report 9	267

4/14/2022 Progress Report 10	269
4/21/2022 Progress Report 11	270
4/28/2022 Progress Report 12	271
9/10/2022 - Motivation	272
9/23/2022 Preliminary Design Specifications	273
10/7/2022- Preliminary Presentation	274
10/12/2022 Preliminary Report	275
12/9/2022 Final Presentation	276
12/12/2022 Final Report	277
Sam Bardwell	278
Research Notes	278
Biology and Physiology	278
12/10/22 Incubator Disinfectants and Cleaning	278
12/10/22 Clean Incubator Practices	279
Competing Designs	280
9/12/22 ibidi Stage Top Incubator	280
Part Research	281
9/12/22 Solenoid Valve Research	281
9/13/22 Ball Valve Research	282
9/18/22 Solenoid Air Valve	283
9/26/22 Rubber Stopper for Testing Lid	284
9/29/22 Solenoid Adaptors	285
10/31/22 Solenoid Flow Rate Math	286
11/1/22 Solenoid Flow Rate Math PSI and D	288
12/11/22 Bernoulli's Equation	289
11/11/22 Tong Lecture	290
Progress Reports / Individual Contributions	291
9/15/22 Progress Report 1	291
9/22/22 Progress Report 2	292
9/29/22 Progress Report 3	293
10/6/22 Progress Report 4	295
10/13/22 Progress Report 5	296
10/20/22 Progress Report 6	297
10/27/22 Progress Report 7	298
11/3/22 Progress Report 8	299
11/10/22 Progress Report 9	300
11/17/22 Progress Report 10	301
11/24/22 Progress Report 11	302
11/30/22 Progress Report 12	303
12/8/22 Progress Report 13	304
Design Ideas	305
9/18/22 Needle Valve Design Idea	305
9/21/22 Pin Valve Design Ideas	306
9/26/22 Testing Lid Design	308
Training Documentation	309
2/8/2020 Woodworking 1	309
2/8/21 Biosafety Certification	310
3/12/21 Chemical Safety Certification	311
10/28/21 Green Permit	312
2/4/22 Laser Cutter Permit	314
Spring 2022 Notes	315
Research Notes	315
Biology/Physiology/Chemistry	315
1/31/22 Copper Thermal Conductivity	315
1/31/22 Thermal Conductivity of Water	316
2/2/22 Heat Transfer Calculations	317
2/22/22 Heat Transfer Calculations Continued	319
Competing Designs	321
2/24/22 EVOS Onstage Incubator	321
Parts	323
1/31/22 Waterproof Insulation Products	323

2/2/22 Black Acrylic Research	325
2/28/22 Draw Latches	327
3/23/22 Threaded to Barb Tube Adaptors	328
3/23/22 Latch Clamp Research	329
Design Ideas	330
2/6/22 SOLIDWORKS to Laser Cutter Information	330
2/6/22 Automatic Box Generator for the Laser Cutter	331
2/14/22 SOLIDWORKS Design Matrix Drawings	332
2/23/22 SOLIDWORKS Drawing with Fingered Edges	334
3/8/22 Handwritten Drawing of CO2 Input Controller	335
3/22/22 Updated Solidworks Drawing for Laser Cutter	336
3/22/22 Laser Cut Prototype	337
4/6/22 Acrylic Laser Cut SOLIDWORKS and Drawing	339
Training Documentation	342
2/8/2020 Woodworking 1	342
2/8/21 Biosafety Certification	343
3/12/21 Chemical Safety Certification	344
10/28/21 Green Permit	345
2/4/22 Laser Cutter Permit	347
3/13/22 WARF Presentation Notes	348
Progress Reports	351
2/3/22 Progress Report 1	351
2/10/22 Progress Report 2	352
2/17/22 Progress Report 3	354
2/24/22 Progress Report 4	356
3/3/22 Progress Report 5	357
3/10/22 Progress Report 6	358
3/24/22 Progress Report 7	359
3/31/22 Progress Report 8	361
4/7/22 Progress Report 9	363
4/14/22 Progress Report 10	366
4/21/22 Progress Report 11	368
4/28/22 Progress Report 12	370
Katie Day	371
Research Notes	371
Fall 2021	371
Design Ideas	371
09/23/2021 Katie and Sam Initial Design Idea	371
Arduino Code	372
11/14/2021 Thermistor Code	372
11/14/2021 DHT22 Temperature and Humidity Code	374
11/14/2021 DHT22 Sensor Library	375
11/14/2021 Adafruit Sensor Library	379
11/14/2021 MH-Z16 CO2 Monitor Code	382
Testing	383
12/03/2021 Thermistor Testing	383
12/03/2021 CO2 Testing	384
12/03/2021 Humidity Testing	385
12/07/2021 Group Testing Protocols	387
Incubator	388
12/07/2021 Incubator Fabrication	388
12/07/2021 Attempted Incubator Testing	393
Spring 2022	395
Design Ideas	395
2/28/2022 CO2 Valve Monitoring	395
Training Documentation	396
3/11/2022 WARF Presentation	396
Fabrication	399
3/21/2022 Initial Prototype Laser Cutting	399
3/22/2022 Prototype Laser Cutting - Copy	400
3/30/2022 Flow Rate Calculations	402

4/5/2022 DC Motor Circuitry and Prelim Code	405
4/11/2022 Incubation Chamber Fabrication	407
4/21/2022 Completed Arduino Code	410
Testing	413
4/5/2022 Humidity Testing	413
4/5/2022 Temperature Testing (along with incubator Humidity Testing)	414
4/21/2022 Whole Incubator Temperature and Humidity Testing	416
4/26/2022 Recovery Testing	419
Biology and Physiology	422
9/11/22 Solenoid Valve Principles	422
9/11/ 22 Coding	424
9/13/22 Waterproofing applications	425
9/20/22 How to Make Electrically Conductive Glass	426
Previous Biology and Physiology Research	428
9/22/2021 Materials	428
10/8/2021 Optical Properties of Well Plates	432
9/12/2021 - Cell Culture Basics	433
9/12/2021 EU Cell Culture Basics Handbook	436
9/12/2021 CO2/Cell Culture Incubator Basics	437
2/4/2022 Humidity Sensor	439
2/22/2022 Heat Transfer for Copper and Water Bed	440
Competing Designs	441
9/9/22 Affordable Solenoid Valve Options	441
9/20/22 Conductive Glass	442
10/26/22 Flow Rate Testing - Copy	445
11/18/22 I2C NDIR	447
Design Ideas	448
09/26/2022 Solenoid Valve initial coding	448
09/26/2022 Updated whole sensor code	449
10/19/22 Temperature Homogeneity Testing Code	450
10/19/22 CO2 Homogeneity Testing Code	451
CO2 and Solenoid	452
10/20/22 Solenoid Valve Functionality Testing	452
10/20/22 UPDATED_ CO2 Homogeneity Testing Code	457
11/3/22 CO2 and Solenoid Relay Communication Codes	458
11/10/22 NDIR Calibration Data	459
11/17/22 NDIR with Lightbulb Testing	460
11/17/22 FINAL CO2 AND SOLENOID CODE	461
11/30/2022 CO2 Testing	462
12/12/2022 Concluding Thoughts	463
Maya Tanna	464
Spring 2022 Research Notes	464
Biology and Physiology	464
02/01/2022 Preventing Cell Culture Contamination with Copper CO2 Incubators	464
02/01/2022 Thermal Properties of Copper	466
02/06/2022 Ensuring CO2 Function	467
02/13/2022 Standard Tolerance Values	468
Competing Designs	470
02/06/2022 Self-Installing Incubator Monitoring System	470
02/12/2022 CO2 Progress from Previous Semesters	472
Research Notes	474
Biology and Physiology	474
11/07/2022 Anti-Fog Coating Mechanisms and Application	474
11/07/2022 Incubator Sterilization Using H2O2	475
Competing Designs	476
09/11/2022 PrintrLab Incubator	476
09/18/2022 Anti Fog Options	478
10/22/2022 ImageJ Quantification Methods	479
11/02/2022 ImageJ Intensity Quantification Methods	480
11/04/2022 Show and Tell Notes/Ideas	481
11/07/2022 Image Analysis in MATLAB	482

11/11/2022 Tong Lecture Notes	484
12/1/2022 ImageJ Problem-Solving	485
Design Process	486
Testing	486
Testing Protocols	486
09/18/2022 Homogeneity Test Protocol	486
09/24/2022 Anti Fog Application Test Protocol	487
09/24/2022 Testing Protocols (Template) Updated 1	488
09/20/2022 Testing Protocols (Template) Updated	489
09/11/2022 Testing Protocols (Template)	490
10/03/2022 Anti Fog Test Results	491
10/20/2022 Anti Fog Pilot Imaging	493
10/25/2022 Optical Testing Results	495
10/28/2022 Anti Fog Testing Trial 1	499
11/01/2022 Anti Fog Testing Trial 2	502
11/02/2022 Anti Fog Testing Trial 3	505
Training Documentation	508
09/11/2022 Biosafety and Chemical Safety Training	508
Progress Reports	509
09/15/2022 Maya's Progress Report 1	509
09/22/2022 Maya's Progress Report 2	510
09/29/2022 Maya's Progress Report 3	511
10/06/2022 Maya's Progress Report 4	512
10/13/2022 Maya's Progress Report 5	513
10/20/2022 Maya's Progress Report 6	514
10/27/2022 Maya's Progress Report 7	515
11/03/2022 Maya's Progress Report 8	516
11/10/2022 Maya's Progress Report 9	517
11/17/2022 Maya's Progress Report 10	518
11/24/2022 Maya's Progress Report 11	519
12/01/2022 Maya's Progress Report 12	520
12/08/2022 Maya's Progress Report 13	521
12/15/2022 Maya's Progress Report 14	522
Drew Hardwick	523
Spring 2022	523
Research Notes	523
Biology and Physiology	523
Metal Thermal Properties Research - 2/8/22	523
CO2 Input Research - 2/20/22	524
Competing Designs	525
Reflection on Last Semester's Progress - 2/9/22	525
Parts	528
Metal Tubing Research - 2/5/22	528
Acrylic Research 2/9/22	529
CO2 Valve Research 2/25/22	530
Preliminary Purchasing Order 3/9/22	534
Waterproofing Acrylic Research 4/4/22	537
Final Purchasing List 5/3/21	539
Fabrication	543
Laser Cutting Research - 2/10/22	543
Motor Purchasing and Circuitry Meeting - 3/23/22	545
Copper Bending Research 3/25/22	546
Copper Bending Session - 3/28/21	548
SOLIDWORKS CO2 Valve Holder Design 4/6/22	550
SOLIDWORKS CO2 Valve Holder Editing Session 4/8/22	553
CO2 Valve Holder Printing 4/12/22	555
Caulking Final Prototype - 4/12/22	557
Design Ideas	558
CO2 Past Teams' Progress 2/15/22	558
Arduino CO2 Incubator Possible Design - 2/18/22	560
CO2 Valve Holder Brainstorm Session 4/5/22	564

Testing	568
Temperature, Humidity and Leakage Testing - 4/19/22	568
CO2 and Recovery Testing - 4/26/21	571
Training Documentation	574
WARF Lecture Notes - 3/11/22	574
Bioentrepreneurship Lecture Notes - 1/1/22	575
Research Notes	576
Biology and Physiology	576
Background	576
9/20/22 - Conductive Glass	577
9/20/22 - How a solenoid Valve works	578
Competing Designs	580
Previous Competing Designs	580
10/18/2022 Voltage Relay	582
Parts	585
9/15/22 - Solenoid Valve Purchasing	585
9/21/22 - Makerspace Meeting	587
9/21/22 - First Materials Purchasing Order	589
12/12/22 - BPAG Final Expenses	591
Design Ideas	592
9/13/22 - CO2 Valve Types Research	592
9/28/22 - Solenoid Control Code via Arduino	594
9/29/22 - Materials Check	597
11/3/22 - Linking 2 Arduinos to Communicate with one another	598
11/3/22 - I2C Arduino Communication	600
11/9/22 - Window Wiper Sketch Idea	603
Fabrication/Testing	604
10/3/22 - Circuit Design	604
10/20/22 - Relay Schematic	606
10/20/22 - Solenoid Testing	607
10/26/22 Solenoid CO2 Sensor Coding and Testing	610
11/10/22 - CO2 Feedback Testing	613
11/15/22 & 11/21/22 - Wiper Fabrication	615
11/30/22 - CO2 Testing with Hard Coded Solenoid	616
12/5/22 - 12/6/22 Live Cell Testing	618
Bella Raykowski	620
12/12/22: Contributions	620
Research Notes	621
Spring 2022	621
Biology and Physiology	621
2/10/22- A hot water supply as the source of Legionella pneumophila in incubators of a neonatology unit	621
2/14/22- The Thermal Conductivity of Common Tubing Materials Applied in a Solar Water Heater Collector	623
2/22/22- Advantages of laser machine cutting acrylic	625
3/1/22- Why is CO2 Used in the Incubation Industry?	626
5/3/2022- Cell Viability Staining	628
5/3/2022- Biosafety level 2 standards	629
Competing Designs	630
2/10/22- Micro-CO2-Incubator for Use on a Microscope	630
5/4/2022 Ividi Stage Top Incubator	631
Biology and Physiology	632
9/21/22: Two Ways to Count Cells in ImageJ	632
9/22/22: Methods to Estimate Cell Confluency	634
9/30/22: A potential method to induce hydrophobicity on glass surface while retaining its anti-reflective abilities	635
11/14/22: O2 plasma/PDMS silane deposition	637
11/14/22: Preparation of Transparent Superhydrophobic Glass slides	638
11/14/22: Laplacian Filter to measure focus quality	640
Competing Designs	641
10/11/22: Fisherbrand Microscope Slides	641
Design Ideas/Testing	642
Spring 2022	642
Brainstorm/fabrication	642

3/1/22- Math calculations for heat transfer	643
4/26/2022 Solenoid Valve	644
4/26/2022 Fog Resistant Glass	646
4/26/2022 Fog Resistant Spray	647
Testing	649
3/25/2022 Optical Testing Protocol	649
3/25/2022 Optical Testing Images	650
4/26/2022 Recovery Testing	653
5/3/2022 Cell Culture Protocol	654
5/3/2022 Cell Staining Testing Protocol	655
5/3/2022 Full Testing Protocol (updated)	656
Cell Testing	657
9/23/22: Cell Passage 1	657
9/23/22: Cell Viability Testing Protocol (Confluency)	658
9/30/22: Cells Week 2 check	659
10/3/22: Control Cell Confluency Test Day 0	660
10/4/22: Control Cell Confluency Test Day 1	661
10/5/22: Control Cell Confluency Testing Day 2	662
10/6/22: Control Cell Confluency Test Day 3	663
10/7/22: Control Cell Confluency Test Day 4	664
10/10/22: Control Cell Confluency Test Final Results	665
12/10/22: Updated Cell Viability Testing Protocol	666
12/10/22: Prototype Cell Confluency Test	667
12/10/22: Cell Confluency Comparison	669
Anti-fog testing	670
10/19/22: Anti-Fog Testing	670
10/28/22: 4 pumps	671
11/01/22: 8 pumps	672
11/02/22: 12 pumps	674
12/10/22: MATLAB analysis of anti-fog testing	675
10/25/22: Optical Testing	677
12/01/22: MATLAB Image Test Code	678
12/06/22: Optical Testing Matlab Analysis	679
Training Documentation	681
03/01/2022 Lab Training	681
11/11/22: Tong Lecture	683
2014/11/03-Entry guidelines	684
2014/11/03-Template	685



Team contact Information

SAMUEL BARDWELL - Sep 09, 2022, 12:50 PM CDT

Last Name	First Name	Role	E-mail	Phone	Office Room/Building
Nimunkar	Amit	Advisor	ajnimunkar@wisc.edu		
Puccinelli	John	Client	john.puccinelli@wisc.edu		
Bardwell	Sam	Leader	sbardwell@wisc.edu	612-816-8630	
Day	Katie	Communicator	kmmcgovern@wisc.edu	610-389-5087	
Raykowski	Bella	BSAC	braykowski@wisc.edu	262-229-1696	
Tanna	Maya	BWIG	mtanna@wisc.edu	847-894-1626	
Hardwick	Drew	BPAG	dphardwick@wisc.edu	314-305-4739	



Project description

SAMUEL BARDWELL - Sep 09, 2022, 1:00 PM CDT

Course Number: BME 301

Project Name: Microscopic Cell Incubator

Short Name: Cell Incubator

Project description/problem statement:

Develop a low cost cell culture incubation chamber that is compatible with an inverted microscope and capable of live cell imaging. This incubation chamber must be able to maintain an internal environment of 37 C, 5% CO₂, and 95-100% humidity over a long duration of time, without compromising the integrity of the microscope's optics or functionality. Special consideration should be taken to maintain even heating and humidity across the chamber as gradients can result in evaporation from low volume cultures such as microfluidic devices. Current commercially available systems are prone to these issues and are extremely expensive. Commercial systems also tend to be large and enclose the entire microscope making it difficult to assemble and remove and between uses. Because of their size, they also hinder use of the microscope in general.

Constraints:

The prototype must maintain an internal environment of 37 C, 5% CO₂, and ~95% humidity over the course of 1 week. It must not interfere with the microscope optics or functionality. The overall cost of fabrication must be below \$100 in order for this to be an affordable option.

About the client:

John Puccinelli is the head of the Biomedical Engineering Department at the University of Wisconsin-Madison, along with being an undergraduate advisor. He is a course instructor with interests in developing hands-on approaches to teaching especially related to biomaterials, tissue/cellular engineering, biomemes/microfluidics, and design. He coordinates, instructs and advises the design curriculum at UW-Madison.



9/19/22 Initial Client Meeting

MAYA TANNA - Sep 19, 2022, 2:03 PM CDT

Title: Initial Client Meeting

Date: 9/19/22

Content by: All

Present: All

Goals: Ask the client any follow-up questions that will better help us meet our semester goals

Content:

See attached document.

Conclusion: We will use these answers to help guide us this semester.

MAYA TANNA - Sep 19, 2022, 2:03 PM CDT



[Download](#)

Client_Meeting_Questions.pdf (56.2 kB)



9/16/22 - Advisor Meeting

Drew Hardwick - Sep 16, 2022, 12:35 PM CDT

Title: Advisor Meeting

Date: 9/16/22

Content by: Drew

Present: All

Goals: Show Previous Project Progress

Content:

- Went over previous Final report to update Professor Nimunkar on our design ideas, for the box, temperature/humidity, testing and previous CO2 design
- For CO2 can we put the air flow into a separate container and control the flow from that? - Nimunkar
- Katie Discussed Solenoid Valves
- Maya discussed Testing Plans
 - Get Cells from Pucc
 - anti fogging agent
- How to prevent Fogging
 - Conductive Glass, current heats up glass
 - Swim Goggle spray
- Sam discussed new \$19,000 similar product and ball valves
 - Heated glass - good idea for ours
 - DC/stepper motor to turn ball valve
 - Keep looking for valve controls
- Drew discussed ball, solenoid, and gate valves
 - motorized ball and solenoid valves depending on grainger price
 - Action item: what circuitry would we need? How would we connect it to the CO2 tank?
 - don't wanna have to keep adjusting the torque for the motor based on the tank.
 - should be human control --> completely open
- Trap door design
- Bella - Live cells
 - Get access from Pucc

Conclusions/action items:



9/23/22 - Advisor Meeting

MAYA TANNA - Sep 23, 2022, 3:32 PM CDT

Title: Advisor Meeting

Date: 9/23/22

Content by: Maya

Present: All

Goals: Document what was discussed at our meeting with advisor

Content:

- **Katie:** looked more into conductive glass and how that application would work, look into the mechanism of making conductive glass and if the budget was viable (it would be), in order to get the condensation reaction we are looking for it would have to be 40 degrees Celsius
 - Conclusion: Not the method we should go with because we would be cooking the cells at the bottom or top
 - Looked into some waterproofing applications that were non-toxic but wasn't successful
 - Better strengthened her knowledge on Arduino coding with solenoid valves
 - **Action Item:** when we get solenoid valve, start writing code to test it on the CO2 tank
- **Maya:** Created a new test protocol to ensure homogeneity within the system and updated the overall testing protocol template document. Attended client meeting with the team and helped take meeting notes. Researched anti-fogging options on Grainger, and started coordinating purchasing with Drew. Emailed Dr. Puccinelli to obtain cells. Read over the PDS and helped finalize it. Uploaded team progress report to the website.
 - **Action Item:** write another test protocol on testing how often the anti-fog solution needs to be applied to the system, as well as help Bella with live-cell testing
- **Bella:** passaged cells, did research on quantitative methods to test cell viability/cell confluency in ImageJ
 - **Action Item:** help Maya with live-cell testing and getting image calculations set up and continue passaging
- **Drew:** researched more on CO2 regulation, watched videos on how solenoid valves work, met with the MakerSpace to see if they had valves (they didn't but gave good insight), sent purchase request
 - **Action Item:** help with design matrices, secure ordered materials, help Katie with CO2 and coding
- **Sam:** worked on design matrix options - specifically solenoid and pin valves
 - **Action Item:** finish design matrix, make test lid with holes for homogeneity test protocol

Conclusions/action items: Use these notes to ensure that action items are completed next week and everyone is accountable for their own contribution to the project.



10/14/22 - Advisor Meeting

Bella Raykowski - Oct 14, 2022, 12:33 PM CDT

Title: Advisor Meeting

Date: 10/14/22

Content by: Bella

Present: All

Goal: document what was discussed in the meeting

Content:

Design Presentation:

- add a note about cell viability in the PDS, cells should be kept alive for 1 week in the prototype
- in the design matrix, accuracy and reliability should be weighted even more
- put photo references in the design matrix and all following images (not just the first slide that the image appears on)
- explain more about competing designs, cost per year
- how is our device novel and different current commercially available incubators

Solenoid Valve

- when the valve is powered by the Aurdino, nothing seems to happen
- are you getting the correct voltage? need 12 volts, appears to only be getting 3-6 volts
- you don't want to source the voltage from the Aurdino, you will need an outside power source in order to get to 12 volts
- use the DC power supply in the lab to find the needed current and get the power supply from 310 stock room
- there are 2 sections of the power supply, connect to the +/-25 section, this will show you the max current needed to turn it on
- if it doesn't produce enough power, the stock room does have power supplies for computers that would definitely power it
- start looking into the protoboard because a lot of heat is being generated that will mess with the breadboard
- look into using a relay (see 201 documents for how to use it), which can switch large amounts of current on and off
- send an email reminder to Amit to set supplies out for Tuesday

Action item:

Katie and Drew: set up solenoid

Sam: print the homogeneity testing lid

Maya and Bella: reassemble the box with new glass, put the new glass on, and run temperature/optical testing



10/21/22 - Advisor Meeting

MAYA TANNA - Oct 21, 2022, 3:08 PM CDT

Title: Advisor Meeting

Date: 10/21/22

Content by: Maya

Present: Maya, Bella, Sam, Drew

Goals: To document everyone's contributions this week and future plans to ensure that project deadlines are met

Content:

See attached meeting notes.

Conclusions/action items: Use the action items in the document to guide future work and responsibilities.

MAYA TANNA - Oct 21, 2022, 3:08 PM CDT

- Notes**
- Review and implement testing with H₂O₂ and the fermenter
 - Action Item: do flow rate testing and update flow CO₂ testing
 - Start flow out and the fermenter testing (10/21/22)
 - Action Item: Flow Rate Testing: advancement and help with CO₂ testing. Make sure fermenter is working.
 - Start testing testing with the heated water tank with 4-level stages of the tank
 - Action Item: run it and log and do regular testing
 - Experiment with the amount of oxygen and flow rate
 - Start testing testing with the heated water tank with 4-level stages of the tank
 - Action Item: continue doing test culture and log with testing
 - Experiment with the amount of oxygen and flow rate
 - Action Item: Publish a memo of the fermenter by flow
 - Action Item: do flow rate testing and update flow CO₂ testing

[Download](#)

Advisor_Meeting_Notes_10_21.pdf (36.6 kB)



10/28/22 - Advisor Meeting #5

Drew Hardwick - Oct 28, 2022, 12:35 PM CDT

Title: Advisor Meeting #5

Date: 10/28/22

Content by: Drew

Present: Whole team

Goals: Update Dr. Nimunkar on design progress

Content:

- Team
 - Different team members juggling Optical, Homogeneity, and CO2 testing all at once
- Drew
 - This week:
 - syncing CO2 tank, solenoid, and CO2 sensor - problem! gives error
 - Decide between 2 feedback CO2 mechanisms, % based (selected) or flow rate, time based
 - Action Items:
 - separate arduinos w/ Katie - 1 to solenoid, 1 to sensors --> test again
- Katie
 - This week:
 - Flow rate testing - less than .5 seconds to get whole box to 5% CO2
 - syncing CO2 tank, solenoid, and CO2 sensor - problem! gives error
 - Action Items:
 - separate out arduinos w/ Drew
 - homogeneity testing w/ Sam --> specifically get thermistor up and running
- Maya
 - This week:
 - Optical Testing - working on data analysis
 - 1 hour test, image ever 10 min
 - Action Items:
 - 3, hour long imaging trials w/ Bella
- Sam
 - This Week:
 - Laser Cut/ glued homogeneity testing lid
 - Flow rate testing - less than .5 seconds to get whole box to 5% CO2
 - Action Items:
 - Homogeneity testing w/ Katie
- Bella
 - This week:
 - Optical Testing - working on data analysis
 - 1 hour test, image every 10 min
 - Action Items:
 - 3 hour long imaging trials w/ Maya

Conclusions/action items:

- Complete action items above!!



11/14/22 Advisor Meeting 6

SAMUEL BARDWELL - Nov 14, 2022, 2:29 PM CST

Title: Advisor Meeting 6

Date: 11/14/22

Content by: Everyone

Goals: To discuss weekly activities

Content:

Katie:

- Figured out how to talk between Arduino's for the CO2 sensor and solenoid valve
- Conducted homogeneity temperature and humidity sensing

Action Items

- Try LED to use with sensor to figure out Arduino communication error

Drew:

- Figured out how to talk between Arduino's for the CO2 sensor and solenoid valve

Action Items

- Try LED to use with sensor to figure out Arduino communication error

Sam:

- Came up with a new idea to implement the squeegee idea without using a DC motor

Action Items

- Fabricating the squeegee and helping with CO2 testing if needed

Bella:

- Tried to do O2 plasma deposition and tried chemical methods to make the glass hydrophobic to help with anti fog resistance, found Laplacian filter that measures the focus quality for us in MATLAB to analyze current data

Action Items

- Continue troubleshooting data analysis on anti fog testing, potentially take out the bottom glass piece

Maya:

- Researched MATLAB code and ways to data analysis with the anti fog data

Action Items

- Continue troubleshooting data analysis on anti fog testing and test out MATLAB ideas

Conclusions/action items:



11/18/22 Advisor Meeting

MAYA TANNA - Nov 18, 2022, 12:35 PM CST

Title: Advisor Meeting

Date: 11/18/22

Content by: Everyone

Goals: To discuss weekly activities

Content:

Katie:

- Tried LED and used with sensor to figure out Arduino communication error

Action Item: See if there are other issues that people are facing, read about libraries I2C, work with Dr. Nimunkar to fix code

Drew:

- Tried LED and used with sensor to figure out Arduino communication error, helped Sam with fabrication

Action Item: See if there are other issues that people are facing, read about libraries I2C, work with Dr. Nimunkar to fix code

Sam:

- Fabricated makeshift wiper blade as a prototype

Action Items

- Create a knob, recut the rubber to be more flushed, and do some testing on it

-Next semester: implement slider idea

Bella:

- Troubleshooted MATLAB

Action Items

- Continue troubleshooting data analysis on anti fog testing, potentially take out the bottom glass piece

Maya:

- Troubleshooted MATLAB

Action Items

- Continue troubleshooting data analysis on anti fog testing and test out MATLAB ideas



12/2/22 Advisor Meeting

MAYA TANNA - Dec 02, 2022, 12:28 PM CST

Title: Advisor Meeting

Date: 12/1/22

Content by: Maya

Present: Everyone

Goals: To discuss weekly activities

Content:

Katie:

-Did CO2 testing over the course of an hour to see if there was any error

Action Item: learn and complete live cell testing from Monday 9am-Tuesday 9pm, get data every 5 min

Drew:

-Did CO2 testing over the course of an hour to see if there was any error

-Finished wiper fabrication and tested in lab

Action Item: learn and complete live cell testing from Monday 9am-Tuesday 9pm, get data every 5 min

Sam:

-Finished wiper fabrication and tested in lab

Action Item: learn and complete live cell testing from Monday 9am-Tuesday 9pm, get data every 5 min

Bella:

- Figured out MATLAB image analysis

Action Items: Convert to greyscale image, live cell testing Monday 9am-Tuesday 9pm, teach rest of team how to image cells

Maya:

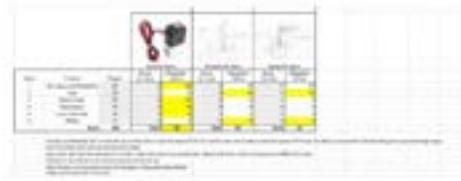
- Figured out Image J analysis that we originally tried

Action Items: Pair Image J analysis with MATLAB Bella figured out.



9/28/22: CO2 Valve Design Matrix

Bella Raykowski - Sep 28, 2022, 5:19 PM CDT



[Download](#)

Design_Matrix.pdf (596 kB)



First Materials Purchasing Order

Drew Hardwick - Dec 12, 2022, 5:20 PM CST

Title: First Materials Purchasing Request

Date: 9/21/22

Content by: Drew Hardwick

Present: All

Goals: Send our first Materials Purchasing Request to Puccinelli

Content:

Hi Dr. Puccinelli,

Attached to this email is the first Materials Purchasing Request of the year for our team! The team is picking up where we left off this semester by replacing the glass plates on the incubator with fresh, clear plates, and purchasing antifog spray to prevent the buildup of condensation due to humidity on the inside of these plates. We are also purchasing a solenoid valve to regulate the CO2 input and start work with the circuitry and fabrication associated with that. Please let me know if you have any questions.

Thank you!

-Drew Hardwick

University of Wisconsin - Madison, Class of 2023

Biomedical Engineering

dphardwick@wisc.edu

314-305-4739

Conclusions/action items:

Microscope Cell Culture Incubator
Title: Microscope, Cell Culture Incubator, Auto Day (Biosci Resources), Drew Hardwick
Date: 10/1/22
Lab: 1010 (C3)
Address: Not Provided
Project Summary: Develop a low cost cell culture incubator chamber with micrographs for culture plates that is compatible with an inverted microscope and capable of live cell imaging.
Reagents/Materials for purchase:

1. [1 x Polysulfone Temperature Control Incubation Chamber](#) (OP 2) 4 inch, 8 liter tank
 - a. New Polysulfone Chamber - price for shipping of cells
2. [1 x GasLab 3000](#) (BR 20)
 - a. Valve to regulate CO₂ input to the desired 5% to 10%
3. [1 x Air-Flo Solution](#) (BR 56)
 - a. Solution to prevent buildup of condensation on top of facility on interior of glass viewing window

[Download](#)

Materials_Purchasing_Request_Fall_2022- Microscope_Cell_Culture_Incubator.pdf (49.2 kB)



Final Expenses

Drew Hardwick - Dec 12, 2022, 5:22 PM CST

Title: Final Expenses**Date:** 12/12/22**Content by:** Drew Hardwick**Present:** N/A**Goals:** Finalize Budget**Content:**

Expenses

Item	Description	Manufacturer	Part Number	Date	QTY	Cost Each	Total	Link
Component 1								
Glass	Polycarbonate Transparent Thermal Insulation Sheets	RADNOR	64005034	9/21/22	4	\$1.21	\$4.84	Link
Component 2								
Solenoid Valve	¼ inch DC 12V 2 Way NC Electric Solenoid Air Valve	PL- Plum Garden	220101	9/21/22	1	\$9.35	\$9.35	Link
Component 3								
Anti-Fog Solution	Lens Cleaning Solution: Anti-fog/Anti-Static Silicone	Grainger	4T932	9/21/22	1	\$6.58	\$6.58	Link
Component 4								
G1/4" Soft Tubing Barbed Adaptor	Barbed Adaptors that screw into Solenoid Valve and attach plasticE-tubing connected to CO2 tank to valve, to incubator	outstanding	N/A	9/29/22	4	\$2.40	\$9.59	Link
Component 5								
TIP120 Transistor	Transistor needed to power the solenoid valve using an Arduino Circuit.	NTE Electronics, Inc	2368- TIP120- ND	10/3/22	1	\$1.00	\$1.00	Link
Component 6								
Black Acrylic	Black Acrylic needed to create the homogeneity testing lid. (1/8 x 18 x 24)	UW- Makerspace	N/A	10/17/22	1	\$10.75	\$10.75	Link
TOTAL:	\$42.11							

Conclusions/action items:



Standards/Specifications

Drew Hardwick - Dec 13, 2022, 8:27 AM CST

Title: Standards/Specifications

Content:

- The incubator would need to adhere to the ISO 13485 regulation which outlines requirements for regulatory purposes of Medical Devices [1]. The incubator would also need to follow the FDA's Code of Federal Regulations Title 21, Volume 8 where it outlines the requirements for Cell and Tissue Culture products [2].
- Make sure to follow these regulations and refer to them during fabrication process

References:

1. "ISO 13485:2016," ISO, 21-Jan-2020. [Online]. Available: <https://www.iso.org/standard/59752.html>. [Accessed: 20-Sep-2021].
2. "CFR - Code of Federal Regulations Title 21," [accessdata.fda.gov](https://www.accessdata.fda.gov), 01-Apr-2020. [Online]. Available: <https://www.accessdata.fda.gov/scripts/cdrh/cfdocs/cfcfr/cfrsearch.cfm?fr=864.2240>. [Accessed: 20-Sep-2021].



10/20/22 - Relay Schematic

Drew Hardwick - Dec 13, 2022, 7:47 AM CST

Title: Relay Schematic

Date: 10/20/22

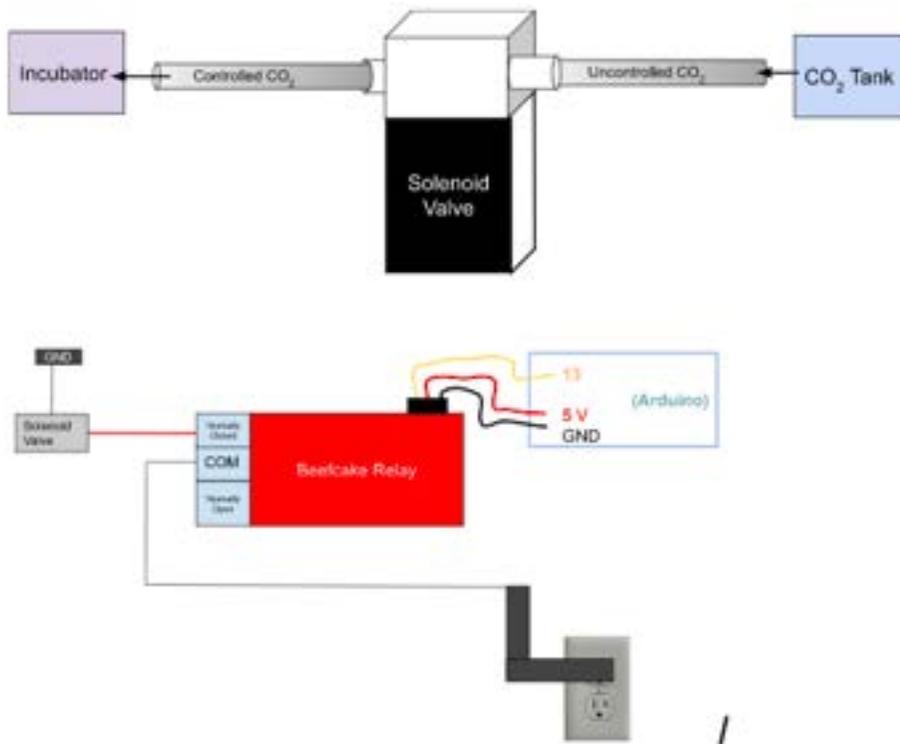
Content by: Drew Hardwick

Present: N/A

Goals: Show Relay Setup for Solenoid Control

Content:

- Below are the schematics/block diagrams used to control the Solenoid valve using outlet power and a Beefcake Relay



Conclusions/action items:

- Link to NDIR Sensing code to properly adapt incubator CO2 internal environment
- Research I2C Code

References:

- <https://www.sparkfun.com/products/13815>



10/24/22 Testing Lid Fabrication

SAMUEL BARDWELL - Oct 25, 2022, 10:09 AM CDT

Title: Testing Lid Fabrication

Date: 10/24/22

Content by: Sam and Katie

Goals: To fabricate a testing lid to use for homogeneity testing.

Content:

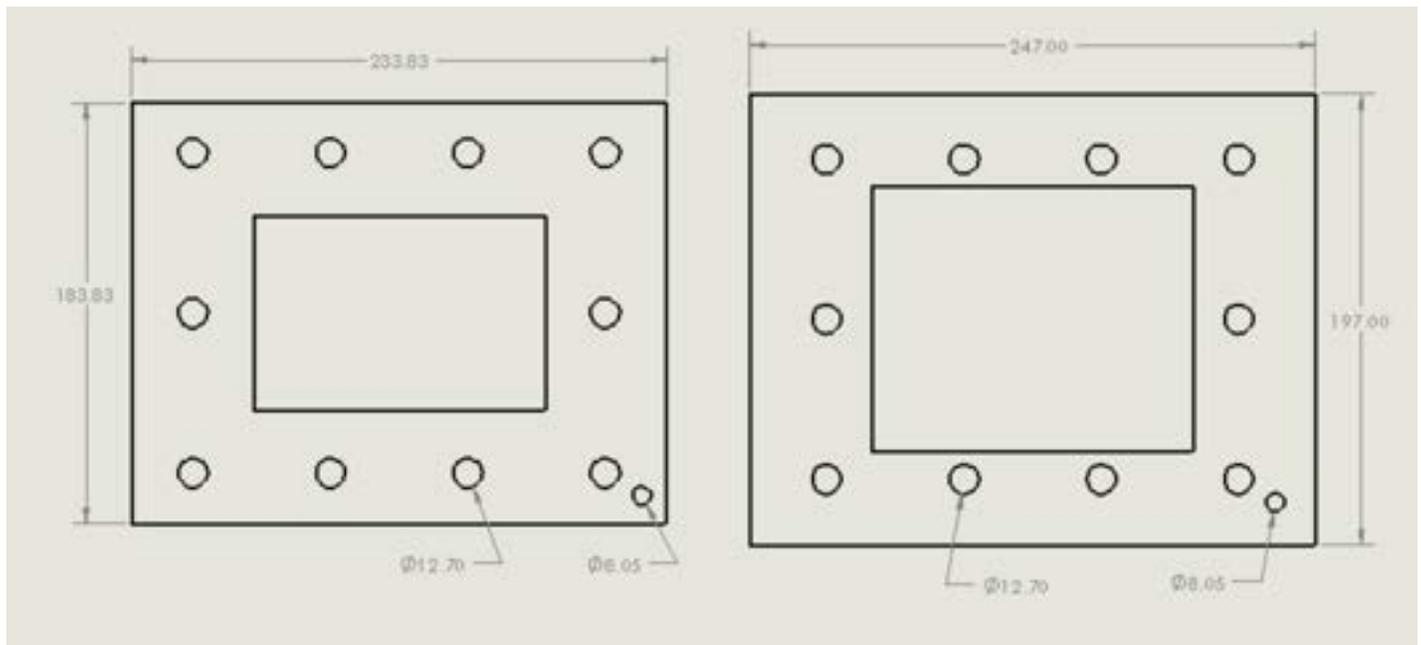


Figure 1: Incubator test lid drawing

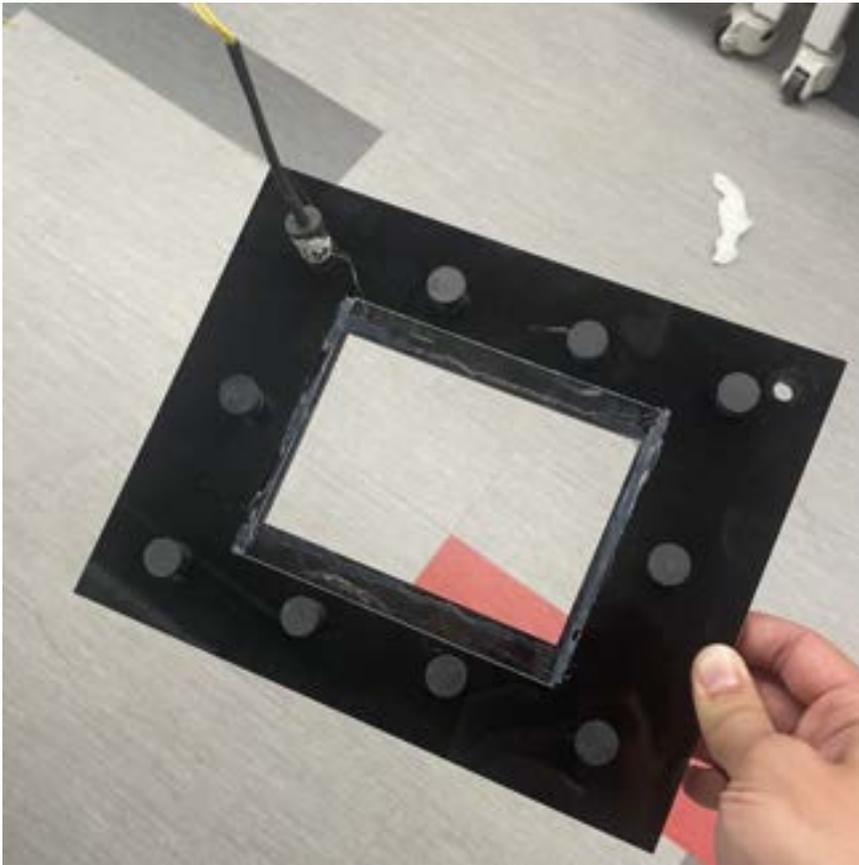


Figure 2: Laser cut incubator test lid with rubber plugs and thermistor.

- The thermistor was inserted into the rubber stopper by drilling a 13/32" size hole into the middle of the rubber stopper and then inserting the thermistor. Different height values can be achieved by moving the head of the thermistor.

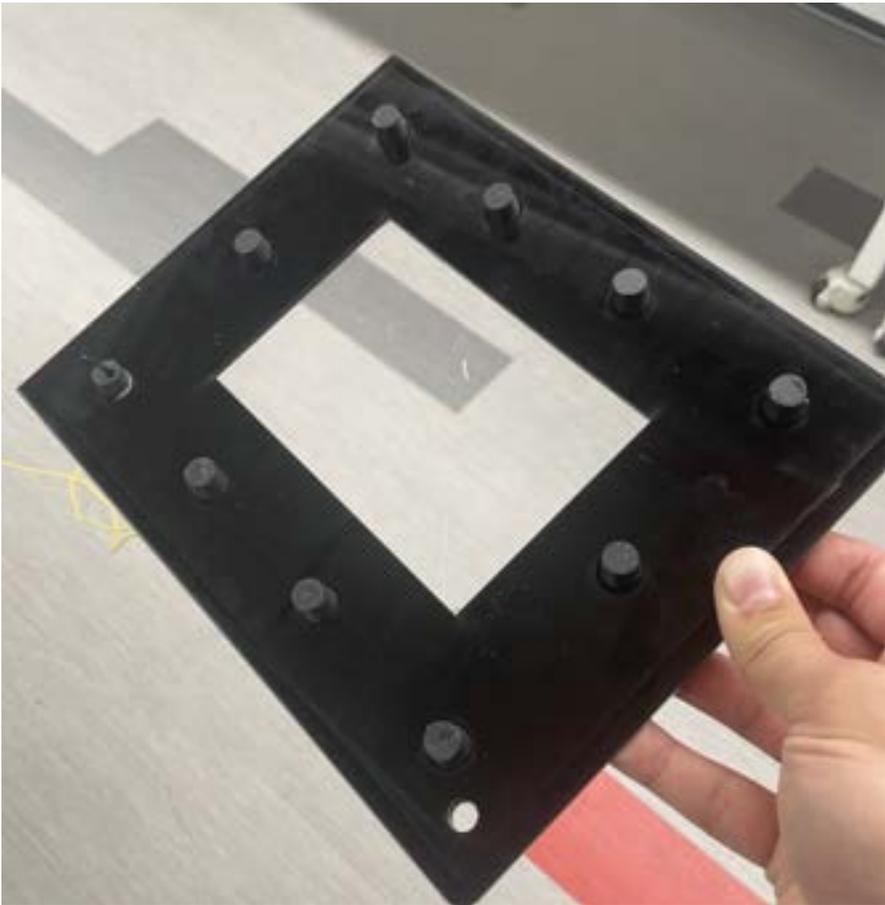


Figure 3: Incubator test lid bottom with plugs and thermistor in.

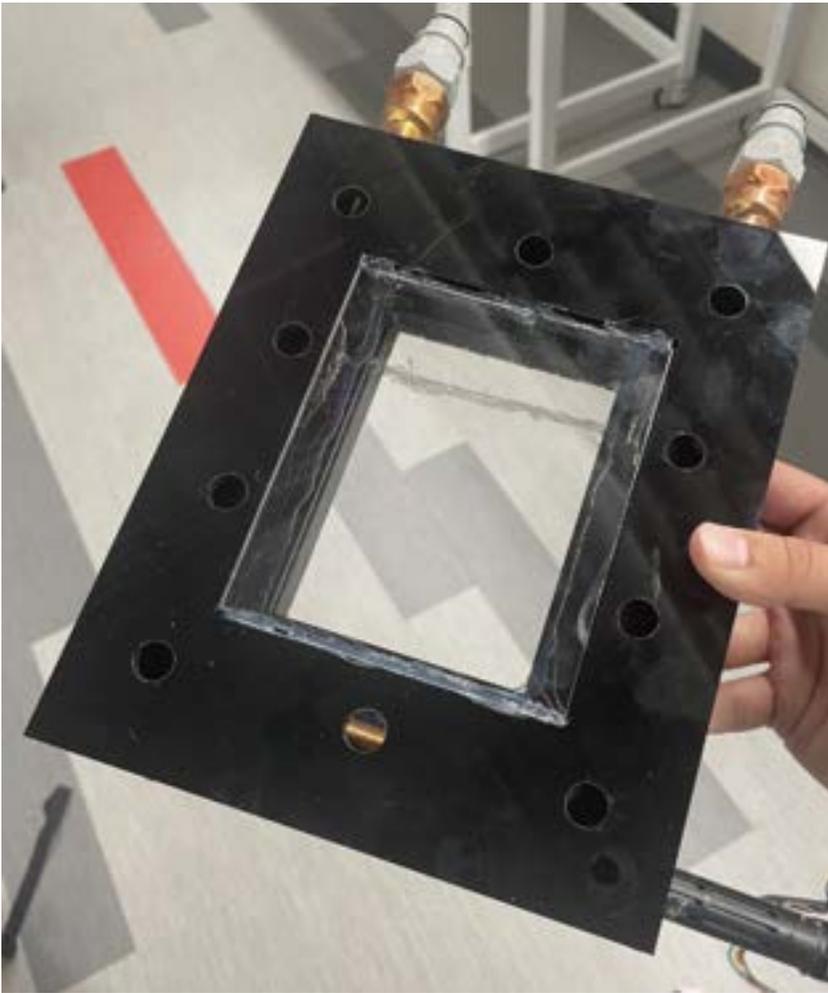


Figure 4: Incubator test lid on the box without rubber stoppers.

Conclusions/action items:

The incubator test lid is ready to begin homogeneity testing. There is an extra hole to insert the CO₂ tubing and to conduct homogeneity testing for the CO₂ as well.



10/26/2022 CO2 Regulation System

Katie Day - Oct 27, 2022, 11:02 AM CDT

Title: CO2 Regulation System

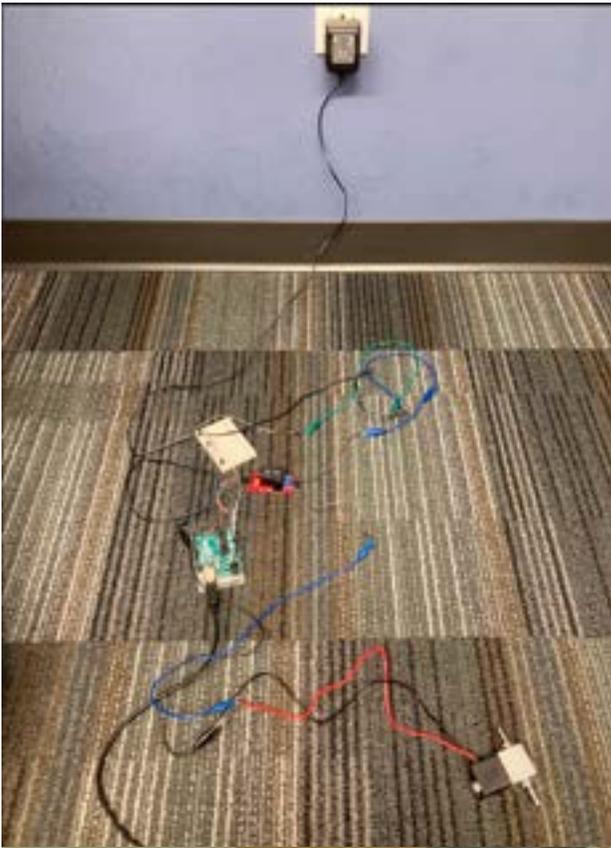
Date: 10/26/2022

Content by: Katie Day and Drew Hardwick

Present:

Goals: To set up a system that connects to the CO2 tank, solenoid valve, and incubator.

Content:



Conclusions/action items:

Figure out a better feedback loop between the NDIR sensor and solenoid valve.



11/10/22 - CO2 Regulation Feedback Testing

Drew Hardwick - Nov 10, 2022, 3:03 PM CST

Title: CO2 Regulation Feedback Testing

Date: 11/10/22

Content by: Drew

Present: Drew and Katie

Goals: Figure out how to link our Solenoid and NDIR Sensor and get them to talk

Content:



- We have been running into issues getting our solenoid to communicate with our NDIR sensor
- We had previously separated them on to different arduinos but they still would not communicate and we got very confused trying I2C and making 1 controller a master and 1 controller a slave
- Today, we tried a different approach of running the solenoid and the sensor from both different microcontrollers and from different computers with 2 separate arduino codes.
- It worked.... kinda
- The sensors were able to communicate, but it was inputting far too much CO2, to the point that it was saturating our sensor at 10% max
- Clearly our code was not working how we wanted it too
- To combat this, we have changed the code to use the flow-rate so that it inputs roughly 1% CO2 every minute and gradually climbs up to 5%
- The issue with this that it keeps constantly climbing AFTER it hits 5% as well
- We have tried to edit the code with a counter shown below, but testing this will take a significant chunk of time, so we have not ran it yet, we will test further next week
- Overall we are happy with the breakthrough in this session :)))

```
#include <SoftwareSerial.h>
```

```
int solenoidPin = 4; //Output pin
int relayPin = 13;
int NDIR = 2;
int val;
int x;

void setup() {
  pinMode(solenoidPin, OUTPUT); //sets the pin as an output
  pinMode(relayPin, OUTPUT);
  // pinMode(NDIR, INPUT); //sets the Sensor value as an
}

void loop() {
  //val = digitalRead(NDIR); //reads the values from the NDIR
  //if (val == 1 ){
  //digitalWrite(relayPin, HIGH); //switch relay on
  //digitalWrite(solenoidPin,HIGH); //Switch Solenoid ON
  //delay(100); //wait 5 milisecond
  //}if (val==0){
  //digitalWrite(relayPin, LOW); //switch relay off
  //delay(100);
  //}
  //delay(1000);
  for (int counter = 0; counter <= 300; counter = counter +1){
    digitalWrite(relayPin, HIGH); //switch relay on
    digitalWrite(solenoidPin, HIGH); //switch solenoid on
    delay(50);
    digitalWrite(relayPin, LOW); //switch relay off
    digitalWrite(solenoidPin, LOW); //switch solenoid off
    delay(72000); // wait 1.2 minutes
  }
  delay(300000);
}
```

Conclusions/action items:

- Test New Code Next week



11/15/22 Wiper Fabrication

SAMUEL BARDWELL - Nov 21, 2022, 4:14 PM CST

Title: Wiper Fabrication

Date: 11/15/22

Content by: Sam and Drew

Goals: To make a functioning wiper to clear condensation off of the upper glass piece on the incubator.

Content:

- The shower squeegee was cut to fit the glass inside the box and to not interfere with the copper piping using a drop saw and metal shears
- The rubber was cut shorter to fit inside the incubator box using an exacto knife and at a 45 degree angle to provide a nice clean removal of water droplets
- 1/8th inch metal rod was inserted into the circular part of the squeegee head
- The metal rod was inserted into a rubber stopper to attempt to twist and clean the water



Wiper bought off of Amazon



Wiper Link: https://www.amazon.com/AmazerBath-Squeegee-Bathroom-Adhesive-All-Purpose/dp/B08BS1F677/ref=sr_1_7?crid=3DFL63J1G47X0&keywords=shower%2Bsqueegee&qid=1668548503&srefix=shower%2Bsqueege%2Caps%2C97&sr=8-7&th=1

- A piece of a brass rod was cut and drilled into with an 1/8th inch drill bit both axially and transversely
- The 1/8th inch stainless steel was then inserted into both the axial and transverse holes and joined with super glue. This design allowed for the wiper to be controlled from outside the incubator box. The user will rotate the axial stainless steel rod which will create a wiping motion on the glass to clear the condensation.






Figure: How the wiper is intended to be used.



Figure: Wiper fabrication with rubber stopper as knob.

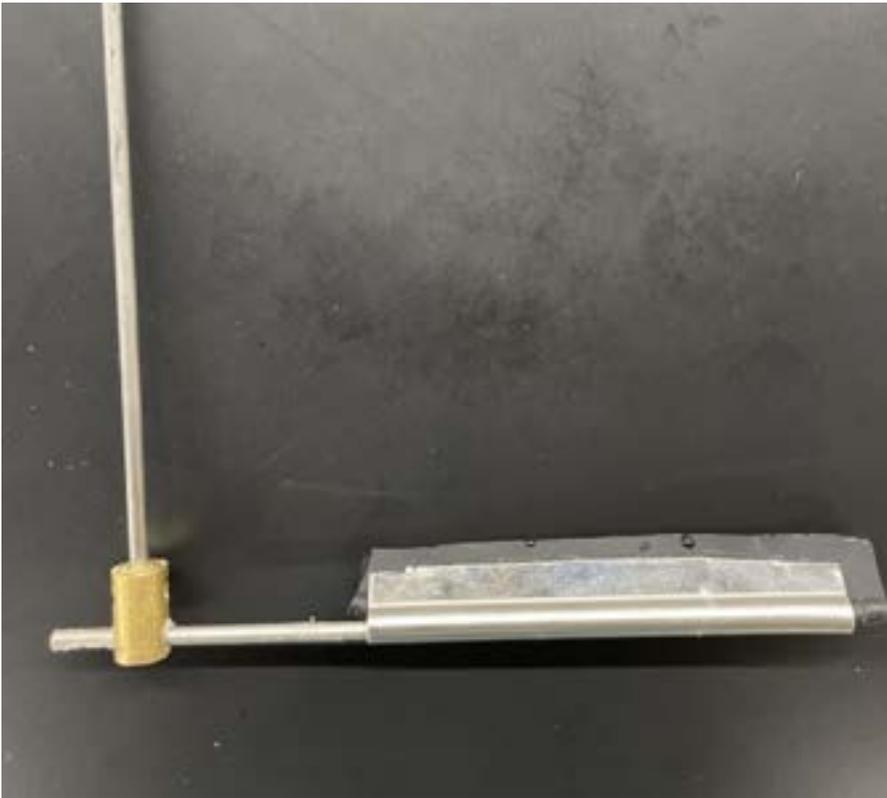

Figure: Inside view of the wiper blade

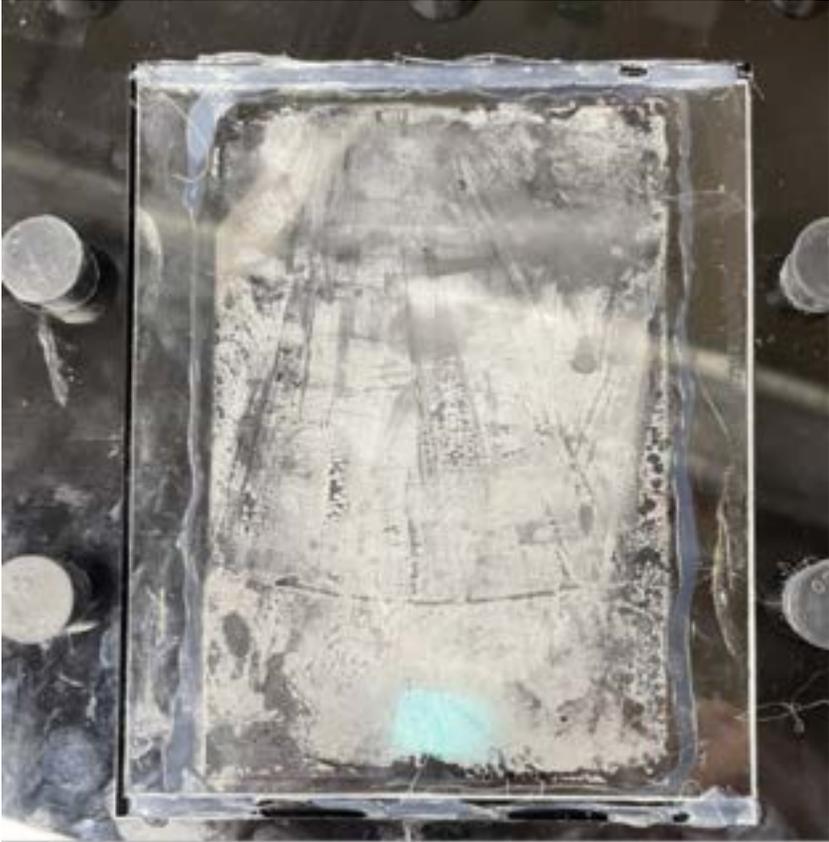


Figure: Glass before using wiper blade



Figure: Glass after using wiper blade.

- Wiper blade was fabricated using an 1/8th inch stainless steel rod, rubber wiper blade, metal rubber wiper blade holder, and a brass joiner with 1/8th inch holes drilled in axially and transversely where, the stainless steel rods can be super glued within at a 90 degree angle. One the horizontal stainless steel rod was inserted into the wiper blade metal holder and the glue in place at a 45 degree angle. A rubber stopper was cut and added to the vertical stainless steel rod end to allow for easier rotation of the wiper blade and also allow the user to remove the wiper mechanism if necessary.

Conclusions/action items:

Need to find a better joiner between both metal rods to allow for manual rotation. The metal rods are being connected at 90 degrees so drilling into a thicker cylinder axially and transversely and then using epoxy to secure the rods in place is the plan. The wiper will be manually controlled from a knob on the top of the lid that is inserted between the entry and exit of the copper piping.

Need to refabricate the rubber and add the joiner. Other ideas is to add a slider into the lid design. Might be a next semester project.

Edit: Joiner was fabricated and works well. Need to recut the rubber to have a crisper angled surface. Might look into purchasing new rubber ends and cutting the flat part shorter and then crimping the metal to fasten it. Knob fabrication will also need to be further looked into. Some worry with spacing between the cell flask and the wiper, but the angled wiper was created to combat this problem and save some space.

Edit Part 2: The wiper blade was fabricated as a whole. There is some difficulty having a perfect edge when wiping the glass because it is difficult to have a clean mechanism with the current design. Next semester a slider wiper will be fabricated which will great help the user control the wiper blade and provide a cleaner wipe. One problem we noticed when testing the wiper is that the glass fogs up fairly quick after being wiped, so the user would have to image the cells fairly quickly if they want to get a clear photo. Other than those, this is good progress on the condensation problem this semester.



11/17/22 FINAL CO2 AND SOLENOID CODE - Copy

Katie Day - Dec 10, 2022, 3:12 PM CST

Title: Final Co2 and Solenoid Code

Date: 11/17/22

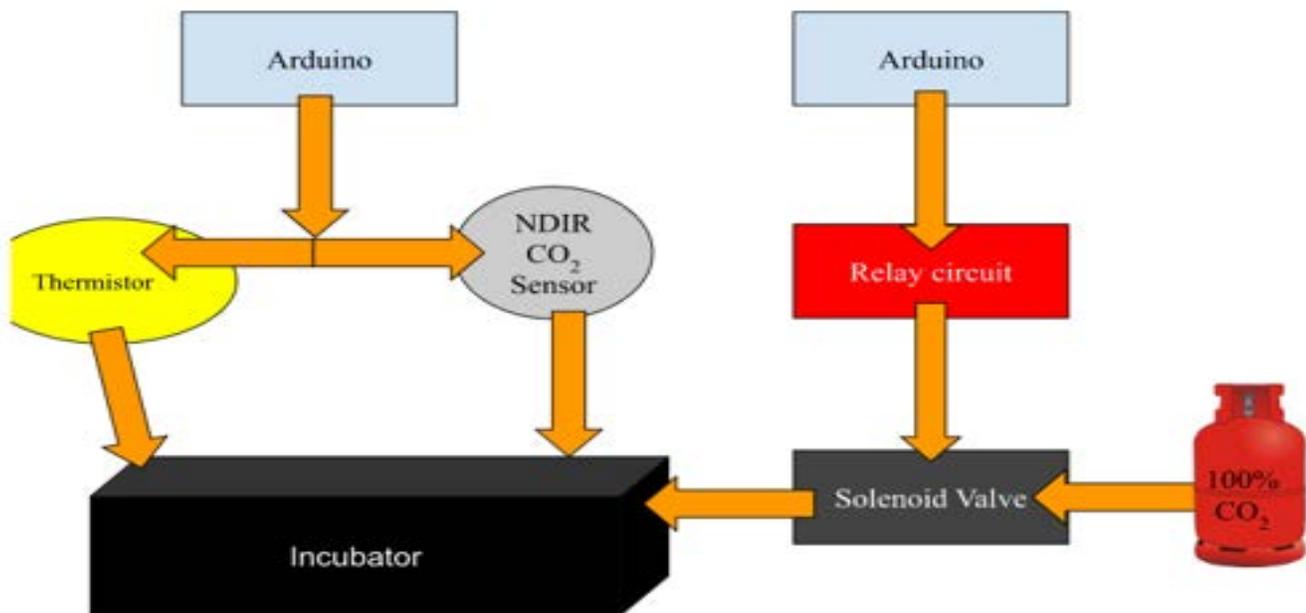
Content by: Katie Day

Present:

Goals: To determine a code for CO2 and the Solenoid.

Content:

By measuring the time and the flow rate I was able to determine two for loops that work for the solenoid valve that output approximately enough CO2 per percentage to keep the Co2 between 4.5-5.5%.



Conclusions/action items:

See code.

Katie Day - Dec 10, 2022, 3:11 PM CST



[Download](#)

sol_test.ino (907 B)

Katie Day - Dec 10, 2022, 3:11 PM CST



[Download](#)

CO2_test.ino (702 B)

Katie Day - Dec 10, 2022, 3:11 PM CST



[Download](#)

Coding_Spring_22.ino (1.73 kB)



Bella Raykowski - Oct 11, 2022, 11:04 AM CDT

Anti-Fog Application Test Protocol

Introduction:
 Name of Tester:
 Copies of Test Performance:
 Size of Test Performance:

Objective:
 The test will determine the anti-fog application is applied to the required order to prevent condensation and visible issues through the glass. The goal is for the fog to not be visible through the protocol.

Steps	Procedure	Verification/Validation	Pass/Fail	Tester/Date
1	Apply 2 points of the anti-fog application to the glass. Apply in a cross pattern. Apply all glass surfaces within the frame.	<input type="checkbox"/> Verified Comments:		
2	Apply the anti-fog application to the additional application.	<input type="checkbox"/> Verified Comments:		
3	Check for uniformity in coverage. Check for condensation on the glass surface.	<input type="checkbox"/> Verified Comments:		
4	Wait for the time and then the anti-fog starts to appear on the glass surface.	<input type="checkbox"/> Verified Comments:		
5	Repeat steps 1-4 three to six times per window. Provide the procedure for the amount of time that the anti-fog application is applied to each window.	<input type="checkbox"/> Verified Comments:		

[Download](#)

Anti_Fog_Application_Test_Protocol_-_Google_Docs.pdf (43.4 kB)

Comments

Amit Nimunkar

Dec 10, 2022, 8:09 AM CST

You have a column which says "Verification/Validation" - Verification would be for Design requirements and Validation for User requirements. Please specify which of these you would be testing.

Amit Nimunkar

Dec 10, 2022, 8:14 AM CST

Similarly for other such documents. Also provide references if some of these are standard protocols presented in literature.



Bella Raykowski - Oct 11, 2022, 11:05 AM CDT

Cell Viability Test Protocol

Introduction
 Name of Tester:
 Name of Test Facility:
 Site of Test Facility:

Objectives
 The team will be comparing image analysis to quantify the percentage of area covered by the cells over time in order to quantify the nutrient function. The cell area for each time point will be measured in the identical incubator as required by the protocol. The images of the cells will be taken using the Nikon scope in the teaching lab. The control will be the T0. Note that it is critical in the standard incubator in order to provide a baseline on a particular cell death over the course of a week. Another T0-based control is placed inside the incubator at the same time as the control over the course of a week. A section of the test will be needed to ensure that the same section is imaged each day. Using the Nikon scope in the teaching lab, an image will be taken of the preincubated section, then the image will be taken at 1 week.

The team will be able to quantify the percentage of coverage area that will be covering over the course of the week. This will be considered successful if there is no significant difference between the cell area between the control and the prototype.

Step	Method	Verification/Validation	Pass/Fail	Initials of Tester
1	Step 1: Image section of the test with 10x objective and image the section. Analyze in image analysis software if the percent coverage is under 100% (the majority is white) and the field of view is large enough for 1 week of a test.	<input type="checkbox"/> verified Comments:		
2	Step 2: Image section of the test with 10x objective and image the section. Analyze in image analysis software if the percent coverage is under 100% (the majority is white) and the field of view is large enough for 1 week of a test.	<input type="checkbox"/> verified Comments:		
3	Step 3: Image section of the test with 10x objective and image the section. Analyze in image analysis software if the percent coverage is under 100% (the majority is white) and the field of view is large enough for 1 week of a test.	<input type="checkbox"/> verified Comments:		

[Download](#)

Cell_viability_testing_-_Google_Docs.pdf (70.9 kB)

Comments

Amit Nimunkar

Dec 10, 2022, 8:11 AM CST

You have a column which says "Verification/Validation" - Verification would be for Design requirements and Validation for User requirements. Please specify which of these you would be testing. Also please provide a reference if this is a standard protocol used in literature.



Homogeneity Protocol

Bella Raykowski - Oct 11, 2022, 11:05 AM CDT

Homogeneity Test Protocol

Introduction
 Name of Tester:
 Date of Test Protocol:
 Site of Test Performance:

Expectations
 The team will test the homogeneity of each of the material and how throughout the system to ensure that performance is uniform and that the uniformity. The goal is for each of the conditions to maintain their homogeneity, which the system will include JFIC, EN 100, and 1000/10000.

Step	Procedure	Verification/Validation	Pass/Fail	Tester Initials
1	Obtain a set with the same dimensions as the rest of the products / materials that these sets from throughout the time of the test.	<input type="checkbox"/> Verified Comments:		
2	Place product samples for approximately 100 each to test and record its value.	<input type="checkbox"/> Verified Comments:		
3	Calculate and record the standard deviation (SD) for all of the values. For homogeneity test a SD of 0.001 or less indicates uniformity.	<input type="checkbox"/> Verified Comments:		
4	Repeat steps 1-3 for the homogeneity component.	<input type="checkbox"/> Verified Comments:		
5	Repeat steps 1-3 for the OIL components.	<input type="checkbox"/> Verified Comments:		

[Download](#)

Homogeneity_Test_Protocol_-_Google_Docs.pdf (71.7 kB)

Comments

Amit Nimunkar

Dec 10, 2022, 8:13 AM CST

You have a column which says "Verification/Validation" - Verification would be for Design requirements and Validation for User requirements. Please specify which of these you would be testing. Also please provide a reference if this is a standard protocol used in literature.



Temperature and Humidity Protocol

Bella Raykowski - Oct 11, 2022, 11:06 AM CDT

Internal Environment - Temperature and Humidity Sensor Test Protocol

Introduction:
 Name of Tester:
 Date of Test Performance:
 Title of Test Performance:

Objectives:
 The team will be employing a sensor inside the incubator to measure the internal temperature. The measurements of the humidity and temperature will be obtained by an AHT1550C01 23-Absolute-temperature sensor. The team will test to make sure that the code and the AHT1550 are working correctly by calibrating the sensor and then confirming its accuracy and precision and a typical setup using a thermometer. To calibrate the sensor, the team will use resistance values on the Arduino Uno. Once the sensor is calibrated its accuracy will be tested by first measuring the temperature and humidity of the working environment to gauge if they are both working as expected, and then measuring its temperature accuracy by using ice temperature differences. The team will measure the temperature inside the incubator with a thermometer and the sensor. To keep the incubator completely sealed, the thermometer probe will be using double white tape to fit the incubator and seal through the glass. The tape will be compressed around the sensor wire to allow air to be prevented from the thermometer temperature.

Step	Procedure	Verification/Validation	Pass/Fail	Initials of Tester
1	Calibrate the sensor using resistance values on the Arduino Uno.	<input type="checkbox"/> Verified Comments:		
2	Test the accuracy of the sensor by measuring it with a high and low temperature. Heat a cup of water in a microwave for two minutes. Place the sensor on the top of the water and measure the temperature inside and outside the incubator and seal. Then place the sensor in the incubator and check the temperature output whenever the target is in under three or five sensor takes three minutes, it is verified.	<input type="checkbox"/> Verified Comments:		
3	Set up the incubator for normal use. Seal the AHT1550C01 sensor inside the system.	<input type="checkbox"/> Verified Comments:		

[Download](#)

temperature_protocol.pdf (87.2 kB)



CO2 Sensor Protocol

Bella Raykowski - Oct 11, 2022, 11:07 AM CDT

Internal Environment - CO2 Sensor & Feedback System Test Protocol

Introduction:

Name of Tester:
 Name of Test Performance:
 Date of Test Performance:

Explanation:

The team will be employing sensors inside the incubator in order to measure the internal CO₂ for CO₂ the team employed in the current cell has a sensor to check the CO₂ levels, but a CO₂ sensor will be placed inside the incubator as well. The measurement of CO₂ recorded by the relative sensor should be within 5% of the pressure gauge on the CO₂ tank.

Steps	Procedure	Verification/Validation	Pass/Fail	in Error of Tester
1	Test the precision of the sensor by checking to which it reacts and decrease with general increase and decrease of CO ₂ concentration. Place the sensor in front of the CO ₂ tank dispenser tube. Allow gas to exit the tank at a low flow rate. Observe the sensor value readings increase as the sensor exposure to CO ₂ gas increases. If the sensor, the test is verified.	<input type="checkbox"/> Verified Comments:		
2	Similarly, once the CO ₂ supply from the tank is turned off, observe the value readings from the sensor decrease. If the sensor, the test is verified.	<input type="checkbox"/> Verified Comments:		
3	Set up the incubator for normal use. Record the value read for the tank at room conditions in the comments.	<input type="checkbox"/> Verified Comments:		
4	Set up the CO ₂ sensor and tank within the incubator and turn on when enough CO ₂ is added the incubator that the tank reads around 10% CO ₂ . Record the value showing the tank, the value given to the CO ₂ sensor, and the tank number in the comments.	<input type="checkbox"/> Verified Comments:		

[Download](#)

co2_protocol.pdf (87.6 kB)



Optical Testing Protocol

Bella Raykowski - Oct 11, 2022, 11:08 AM CDT

Optical Testing - Prior to and After Installation

Introduction

Name of Tester:
 Date of Test Performance:
 Site of Test Performance:

Explanation

The team will test High T_g transparent Laser Photopolymers sheets to determine which sheet matches the optical properties of each polymer. Each Polaris has a glass percentage of 75%, a base percentage of 11, and a compensating percentage of 00.00-100. The team has selected test for the transparency percentage of substrates to 80-90 and the base is 11%!! The team will determine through the test imaging, which by determining the amount of light that is transmitted through the sheets and calculate whether 100% transparency is achievable.

Step	Purpose of	Verification/Validation	Pass/Fail	Initials of Tester
1	Place the test number complete step 1-5. Place the substrate to use. Place resolution test over between the 2 sheets of High T _g transparent Laser Photopolymers substrate and the substrate steps.	<input type="checkbox"/> Initial Comments:		
2	Adjust the optical components of the microscope to test clarity based on device alignment. Check the resolution test paper is centered under the microscope lens. Take an image of what is observed under the microscope.	<input type="checkbox"/> Initial Comments:		
3	Repeat steps 1-5 with the other substrate sheets. Record RESULTS TO BE USED FOR REPORT	<input type="checkbox"/> Initial Comments:		
4	Place 5 substrates under the microscope complete step 1-5. complete the step. The team complete all test the test images via email of 1-10-2022 on the last day!! The image with the highest base clarity will be the best substrate based on the image in	<input type="checkbox"/> Initial Comments:		

[Download](#)

optical_protocol.pdf (65.4 kB)



Recovery Testing Protocol

Bella Raykowski - Oct 11, 2022, 11:09 AM CDT

Recovery Test Protocol

Introduction

Name of Tester:
 Name of Test Performance:
 Date of Test Performance:

Objectives

The team will test the recovery time of the incubator after a failure occurred by timing how long it takes for the incubator to return to performance conditions (27°C, 5% CO₂, and 90% RH). The maximum recovery time should not exceed the incubator after a 30-second outage in the laboratory environment.

Step	Protocol	Verification/Validation	Pass/Fail	Tester Initials
1	Set up the incubator for normal use. Record ambient conditions in the environmental study that they fall within the correct ranges (27°C, 5% CO ₂ , and 90% RH).	<input type="checkbox"/> Verified Comments:		
2	Close the incubator for 30 seconds. Shut down CO ₂ supply. Verify that the incubator is working.	<input type="checkbox"/> Verified Comments:		
3	Record ambient conditions in the environmental study after 30 seconds after opening the incubator. Verify that the chamber conditions deviate from the environmental study.	<input type="checkbox"/> Verified Comments:		
4	Close the incubator. Verify that the incubator has not exceeded 30 minutes after a 30-second outage in the laboratory environment. Record the time it took to reach back to normal conditions in the comments.	<input type="checkbox"/> Verified Comments:		

[Download](#)

recovery_protocol.pdf (69.1 kB)



10/26/22 Flow Rate Testing

SAMUEL BARDWELL - Oct 26, 2022, 7:02 PM CDT

Title: Flow Rate Testing

Date: 10/26/22


Content by: Sam and Katie

Goals: To determine the flow rate of CO₂ out of the solenoid valve when the take is set to 17 psi.

Content:

- First we set the CO₂ tank to output at a 17 psi pressure
- Then we set the solenoid code to be open for 1 second
- We attached a balloon to the end of the tubing and ran the code. This filled up the balloon with 1 second of CO₂ gas.
- We obtained a 1L beaker from the lab and filled it up with 550 mL of water
- Then we dunked the balloon into the water, and measured the displacement in order to obtain the volume of gas in the balloon.
- We repeated this for 5 balloons and averaged the amount of mL of gas output in 1 second.
- Since we have the volume of gas outputted from the solenoid in 1 second, we were able to figure out the flow rate of gas from the CO₂ tank, through the solenoid valve in mL/s

Time = 1 sec		Initial Volume = 550 mL	
Trial	Total mL	Flow rate (mL/sec)	
1	850	300	
2	900	350	
3	900	350	
4	850	300	
5	925	375	
		Average = 335 mL/s	
Incubator Volume = 1759.55 mL		5% = 87.98	
		Time = 0.26 seconds	

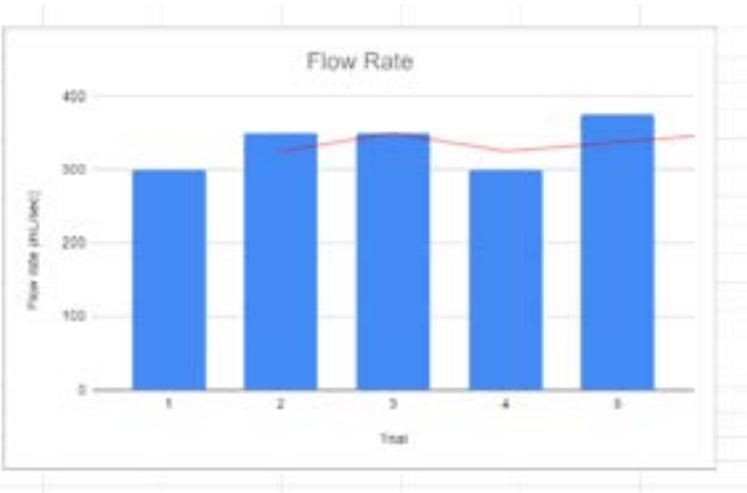

- Using the inner volume of the incubator and understanding that we need 5% CO₂ levels, We calculated how many mL 5% is (87.98). Since we have the flow rate, we can open the solenoid for 0.26 seconds in order to input 5% CO₂ into the incubator when it originally had 0% CO₂.



Figure 1: Photo of the filled balloons after the solenoid being opened for one second. Also shown is the beaker with water.



Figure 2: Solenoid flow testing set up to collect the CO2 output.

Conclusions/action items:

The next steps are to use this information to include it into a code that connects CO2 sensor information to the solenoid. This will allow the solenoid to automatically input the correct amount of CO2 into the incubator box when needed.



11/2/22 Temperature Homogeneity Testing

SAMUEL BARDWELL - Nov 02, 2022, 6:40 PM CDT

Title: Temperature Homogeneity Testing

Date: 11/2/22

Content by: Sam and Katie

Goals: To conduct temperature homogeneity testing.

Content:

Homogeneity testing for temperature set up.

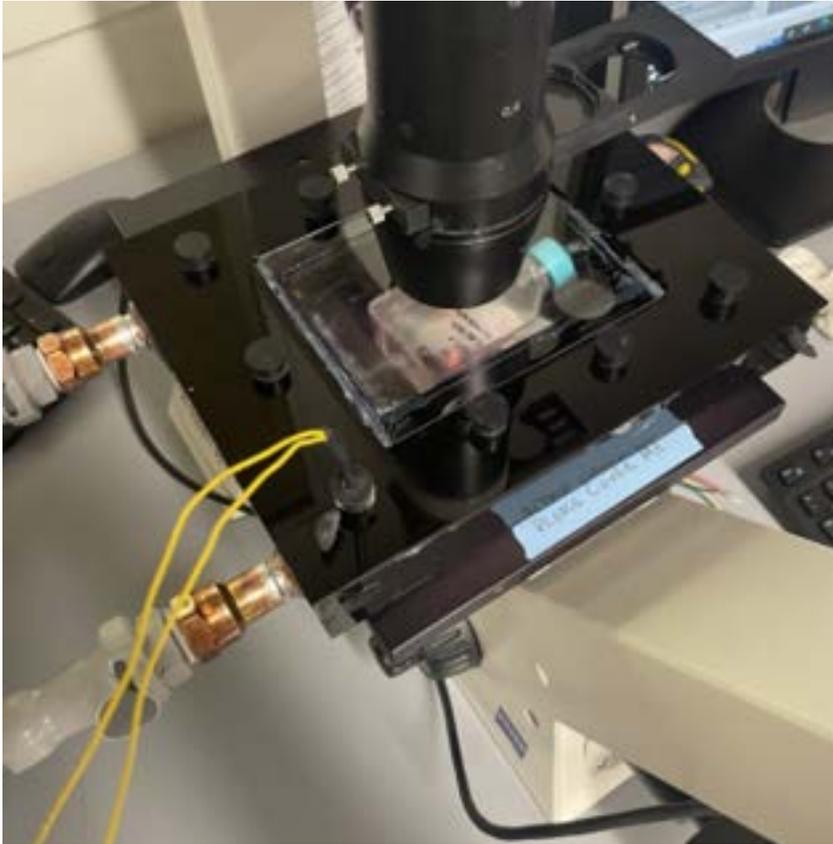


Figure 1: Homogeneity temperature testing lid set up.



Figure 2: Homogeneity testing for temperature whole set up.

Steps:

1. Start at the hole closest to the input of heated water in the homogeneity testing lid to place the thermistor in.
2. Allow heated water pump on the incubator 10 minutes to warm up
3. Begin temperature testing at each hole for 5 minutes, moving in a CCW rotation around the lid (Following the flow of water in the copper pipe).
4. Average temperature data out for those 5 minutes at each spot.
5. Compare the temperature differences at each spot.

Conclusions/action items:

Discuss results and make improvements to the incubator. Conduct another round of homogeneity testing.



[Download](#)

Homo_Data.xlsx (28.4 kB)



11/7/22 Temperature and Humidity Homogeneity Testing

SAMUEL BARDWELL - Nov 09, 2022, 10:38 AM CST

Title: Temperature and Humidity Homogeneity Testing

Date: 11/7/22

Content by: Sam and Katie

Goals: To conduct temperature and humidity homogeneity testing.

Content:

Homogeneity testing for temperature and humidity set up.

Steps:

1. Start at the hole closest to the input of heated water in the homogeneity testing lid to place the thermistor in.
2. Bend the thermistor tip 90 degrees from the rubber stopper and rotate the rubber stopper so the thermistor tip is facing the middle of the incubator
3. Allow heated water pump on the incubator 10 minutes to warm up to appropriate temperature values.
4. Begin temperature and humidity testing at each hole for 5 minutes, moving in a CCW rotation around the lid (Following the flow of water in the copper pipe).
5. Average temperature and humidity data out for those 5 minutes at each spot.
6. Compare the temperature and humidity differences at each spot.

Conclusions/action items:

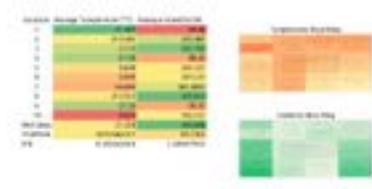
Discuss results and make improvements to the incubator. Temperature and humidity had an average within our threshold for both tests which certifies our temperature and humidity methods. Next is to certify the CO2 input and conduct homogeneity testing for CO2.

Katie Day - Nov 07, 2022, 3:40 PM CST



[Download](#)

Temp_and_Hum_Homo_Testing.xlsx (47.1 kB)



[Download](#)

Final_Heat_Maps.pdf (242 kB)



11/20/22 CO2 Sensor Evaluation

Katie Day - Dec 01, 2022, 12:34 PM CST

Title: CO2 Sensor Evaluation

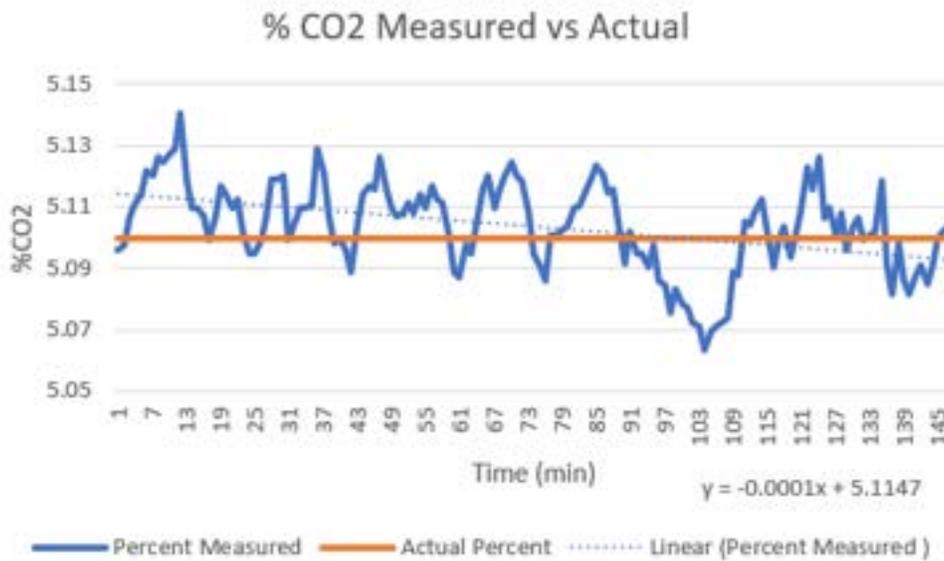
Date: 11/20/22

Content by: Katie Day

Present:

Goals: To evaluate the accuracy of the sensor according to CO2 Test Protocol.

Content:



See attached files.

Conclusions/action items:

The sensor is working properly and ready to use.

Katie Day - Dec 01, 2022, 12:35 PM CST



[Download](#)

CO2_Calibaration.csv (2.7 kB)



[Download](#)

CO2_Calibaration.xlsx (20.7 kB)



11/30/2022 CO2 Testing via Solenoid Valve

Katie Day - Nov 30, 2022, 5:17 PM CST

Title: CO2 Testing

Date: 11/30/2022

Content by: Katie Day

Present: Katie Day and Drew Hardwick

Goals: To test the accuracy of the hardcoded solenoid valve at keeping the incubator at 5% +/- 1%.

Content:

Followed CO2 Testing Protocol. See attached files and images.

Conclusions/action items:

The solenoid valve is able to regulate CO2 and can be used in Live-Cell Testing.

Katie Day - Nov 30, 2022, 5:17 PM CST



[Download](#)

Hard-code_test.csv (73.5 kB)

Katie Day - Nov 30, 2022, 5:17 PM CST



[Download](#)

Custom_Data_-_2022-11-30_-_Recording_1.csv (7.91 kB)



10/10/22: Cell Confluency Test Protocol - Control (Completed)

Bella Raykowski - Oct 10, 2022, 11:24 AM CDT

Cell Confluency Test Protocol

Introduction

Name of Tester: Bella Raykowski
 Name of Test Performance: 10/10/22
 Title of Test Performance: CDB Teaching Lab

Objectives

The team will be employing image J to analyze the percentage of area covered by the cells over time in order to quantify the control condition. This will allow the team to compare and contrast the data against the control condition. The control will be the T25 flask that is cultured in the standard incubator in order to provide a baseline on subsequent cell death over the course of a week. Another T25 flask will be cultured under the prototype of the control line at the control over the course of a week. At the end of the test will be needed to evaluate that the control is not being overgrown. Using the image J software on the test images, an image will be taken of the parallel control section, then the image will be loaded into image J. The team will be able to quantify the percent of cell coverage and track cell confluency over the course of the week. Tests will be conducted until it is clear that there is no significant difference between the confluency between the control and the prototype.

Step	Procedure	Verification/Validation	Pass/Fail	in Error of Tester
1	Day 0: Do a sufficient seed cells into one flask allow cells to settle for 24 hours. Take pictures of the flask with image J and image J software. Transfer to image J and confirm if the percent coverage is correct between the software calculation and the known density confirmed that the software is not able to 1 week at a time.	<input type="checkbox"/> success Comments: Calculated 1.25 million cells Observed 1.25 million cells Percent coverage: 2000%	Pass	0%
2	Day 1: Image section Analysis in image J and confirm if the percent coverage is correct between the software calculation and the known density confirmed that the software is not able to 1 week at a time.	<input type="checkbox"/> success Comments: Calculated image based on 24 hours (2.50 per) Percent coverage: 4000%	pass	0%
3	Day 2: Image section Analysis in image J and confirm if the percent coverage is correct	<input type="checkbox"/> success Comments: Image based on 48 hours	pass	0%

[Download](#)

Cell_Confluency_Test_Protocol_-_Control_Completed_-_Google_Docs.pdf (93.1 kB)



12/5/22 - 12/6/22 Live Cell Testing

Drew Hardwick - Dec 07, 2022, 8:45 AM CST

How to do a media change and change cells

1. Turn the light and place all biological components of the culture.
2. Prepare a properly changed piece of glass.
3. Turn on the UV light on one of the bioarray columns (turn on for the light, for media - 10 min)
4. Remove media from the Culture (flow) stage on the left in the chemical room, media is in the corner of the flask shelf labeled "BME 400 Microarray"
5. Turn on the water tap and place the media inside
 
6. Turn off the UV light and turn on the gases (O₂ and controlled light) in the 37°C incubator.
7. Lay the flat media - 10 min. Turn open the each liquid media into the cell stream on the side flow right.
8. Remove the cell flask from the incubator (open it with 70% ethanol) and place it inside the flask.
9. Remove media from the water bath, the media is now being open with 70% ethanol, and place inside the flask.
10. 10 min in the top of the flask.
11. Remove the lid of the second container and select 7 glass coverslips placed inside the flask.
12. Place the large end of the pipette into the culture reservoir, when the end of the pipette touch any surface (media is in media).
13. Open the cell flask.
14. Hold the flask so that the media is above the top corner that may provide an additional vacuum on the cells.
15. Place the tip of the pipette into the media of the flask, it will vacuum up the media.
16. Remove ALL media.
17. Collect some of the glass biological pipettes from outside the flask (media is in flask).



[Download](#)

Cell_Imaging_Protocol.pdf (1.11 MB)

Title: Live Cell Testing**Date:** 12/5/22 - 12/6/22**Content by:** Drew Hardwick**Present:** Drew, Sam, Bella, Maya, Katie**Goals:** Conduct live cell testing over a period of 36 hours**Content:**

- We set up our entire incubator with temperature/humidity input and CO2 input on the microscope for the first time ever!
- We then got it heated up and started the CO2 regulation system
 - The CO2 proved a bit tricky, we had to connect to two computers
 - The Solenoid control was connected to the tank (which we had to move) and the lab computer where the images from the microscope would be captured
 - The NDIR sensor had to be run from Katie's Laptop so that we could capture the data we needed with the data-streamer function
 - Could not download onto lab computers because of administrator restrictions
 - We then had to play 48 hour youtube videos on both computers to ensure they did not go to "sleep" and stop running our arduino code - Code is detailed in CO2 testing file entry
- Live cells were then put into our incubator for the first time!
 - We were looking to establish a curve for cell growth/death to compare to our cell confluency testing control from earlier in the semester - protocol/results from that are attached to this page
- We imaged the cells every 12 hours by changing the cell media, and then taking off the incubator lid to take an image on the microscope according to Bella's cell imaging protocols attached to this page.
 - The CO2 system had to be restarted any time lid was taken off to image
- Adhered to Biosafety Standards 2.

Results:

- CO2 issues and incubator decay caused premature death of the cells

Conclusions/action items:

- Use I2C next semester in order to maintain the pH of the cells natural environment and refabricate incubator

Drew Hardwick - Dec 07, 2022, 8:45 AM CST

Cell Confluency Test Protocol

Introduction:
 Name of Teacher: **Beth Robinson**
 Course and Section Number: **BIOL101003**
 Title of Test/Experiment: **Cell Counting Lab**

Objectives:
 The student will employ image J in order to quantify the percentage of area covered by the cells over time in order to quantify the cell growth. They will also be able to compare cell confluency in the standard incubator compared to the perkyte. The images of the cells will be taken using the 750x magnification. The control will be the T25 flask that is cultured in the standard incubator to provide a baseline on confluency and both over the course of a week. During T25 flasks will be cultured under the conditions of the same flask as the control over the course of a week. Analysis of the flask will be carried to ensure that the same section is imaged each day. Using the video analysis of the flask, an image will be taken of the perkyte incubator, then the image will be saved into image J. The student will be able to quantify the percentage of coverage and both cell confluency over the course of the week. They will be comparing a control flask to a live significant difference between the confluency between the control and the perkyte.

Stage	Procedure	Verification/Validation	Pass/Fail	Weight of Task
1	Day 0: On a selected week cells will be taken and then used to seed the 25 flask. This section of the flask will then be used to image that section. Analysis of image J will confirm if the percent coverage is similar between the industry incubator and the perkyte. Analysis of the flask will be carried out for 1 week at a time.	<input type="checkbox"/> correct Correctly Cell count 1.25 million cells seeded 125 cells Culture coverage: 2000%	Pass	25%
2	Day 1: Image section Analysis of image J and confirm if the percent coverage is similar between the industry incubator and the perkyte. Analysis of the flask will be carried out for 1 week at a time.	<input type="checkbox"/> correct Correctly Image taken at 24 hours (2.50 per) Culture coverage: 4.000%	pass	25%
3	Day 2: Image section Analysis of image J and confirm if the percent coverage is similar between the industry incubator and the perkyte.	<input type="checkbox"/> correct Correctly Image taken at 48 hours (2.50 per)	pass	25%

[Download](#)

Cell_Confluency_Test_Protocol_-_Control_Completed.pdf (79 kB)

Katie Day - Dec 08, 2022, 10:12 AM CST



[Download](#)

LCT_8.csv (268 B)

Katie Day - Dec 08, 2022, 10:12 AM CST



[Download](#)

LCT7.csv (1.48 kB)

Katie Day - Dec 08, 2022, 10:12 AM CST



[Download](#)

Live_Cell_Test_Pt_3.csv (1.3 kB)

Katie Day - Dec 08, 2022, 10:12 AM CST



[Download](#)

Live_Cell_Test_Pt_5.csv (2.29 kB)

Katie Day - Dec 08, 2022, 10:12 AM CST



[Download](#)

Live_Cell_Test_Pt_6.csv (773 B)

Katie Day - Dec 08, 2022, 10:12 AM CST



[Download](#)

Live_Cell_Testing_Pt_2.csv (222 B)

Katie Day - Dec 08, 2022, 10:12 AM CST



[Download](#)

Live_Cell_Testing_Pt_4.csv (16.1 kB)

Katie Day - Dec 08, 2022, 10:12 AM CST



[Download](#)

Live_Cell_Testing.csv (131 B)

Katie Day - Dec 08, 2022, 10:12 AM CST



[Download](#)

LTC_9.csv (77 B)



12/12/22 Optical Testing

Bella Raykowski - Dec 12, 2022, 5:25 PM CST

Title: Optical Testing

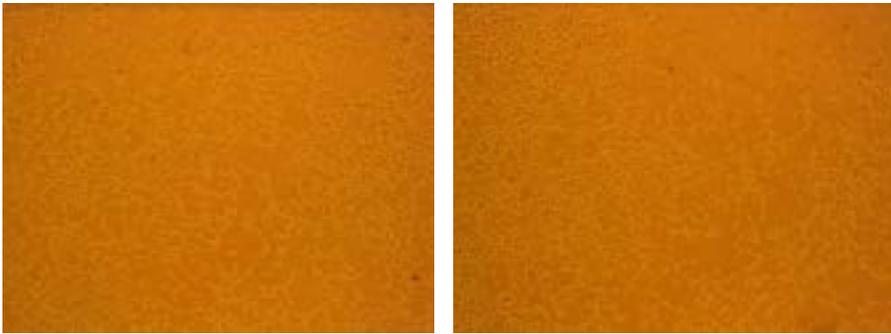
Date: 10/24/22

Content by: Bella Raykowski

Goal: document the optical testing process and images

Content:


- each glass slide was sprayed 3 times with the anti-fog spray to clean off any fingerprints and dust
- control: the T25 flask of cells was imaged by itself (not in prototype) twice, each time at a different location



- experiment: the T25 flask of cells was placed inside the prototype (no water/heating element was added) and was imaged twice, each time at a different location



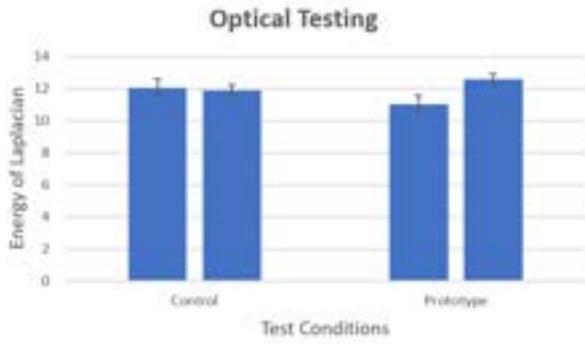Conclusion: we will now to ImageJ analysis to determine if the glass with spray affects the optics of the microscope



```

% Energy of Laplacian
% = gradient(grad(I, [1,0]), [1,0]) + gradient(grad(I, [0,1]), [0,1])
% = gradient(grad(I, [1,0]), [1,0]) + gradient(grad(I, [0,1]), [0,1])
% = gradient(grad(I, [1,0]), [1,0]) + gradient(grad(I, [0,1]), [0,1])
% = gradient(grad(I, [1,0]), [1,0]) + gradient(grad(I, [0,1]), [0,1])

% Energy of Laplacian
L = gradient(grad(I, [1,0]), [1,0]) + gradient(grad(I, [0,1]), [0,1])
energy_L = sum(abs(L(:)), 'all'); % Energy of Laplacian
energy_L = 12.0000

energy_L = sum(abs(L(:)), 'all'); % Energy of Laplacian
energy_L = 11.8000

energy_L = sum(abs(L(:)), 'all'); % Energy of Laplacian
energy_L = 11.0000

energy_L = sum(abs(L(:)), 'all'); % Energy of Laplacian
energy_L = 12.8000

% Plot
figure;
subplot(2,2,1);
plot(energy_L);
title('Energy of Laplacian');
axis([0 14 0 2]);

```

[Download](#)

Optical_testing_matlab_code.pdf (7.43 kB)



12/12/22 Anti-Fog Testing

Bella Raykowski - Dec 12, 2022, 5:29 PM CST

Title: Anti-fog test with 8 pumps of spray

Date: 11/01/22

Goal: Document the process of testing the effectiveness of our anti-fog spray

Content:

- applied 4 pumps of anti-fog spray to each inside piece of glass, allowed to sit for 5 minutes before wiping off with a Kemi wipe

Control 1

Control 2

Time = 0 min



Time = 10 min

Time = 20 min

Time = 30 min



Time = 40 min

Time = 50 min

Time = 60 min



Conclusion: Upon visual examination of the glass, one could see that condensation had formed after 10 minutes of running the system, and optics slowly deteriorated. 8 pumps are not enough to prevent the formation of condensation. Will quantify this data soon.

Title: Anti-fog test with 12 pumps of spray

Date: 11/02/22

Goal: Document the process of testing the effectiveness of our anti-fog spray

Content:

- applied 4 pumps of anti-fog spray to each inside piece of glass, allowed to sit for 5 minutes before wiping off with a Kemi wipe

Control 1

Control 2

Time = 0 min



Time = 10 min

Time = 20 min

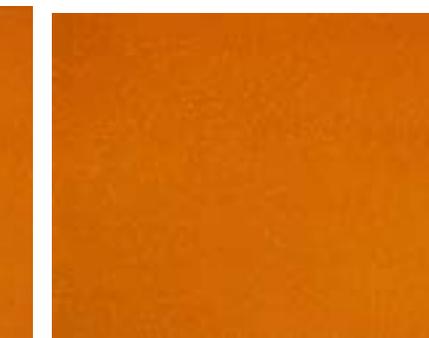
Time = 30 min



Time = 40 min

Time = 50 min

Time = 60 min



Conclusion: Upon visual examination of the glass, one could see that condensation had formed after 10 minutes of running the system, and optics slowly deteriorated. 12 pumps are not enough to prevent the formation of condensation. Will quantify this data soon.

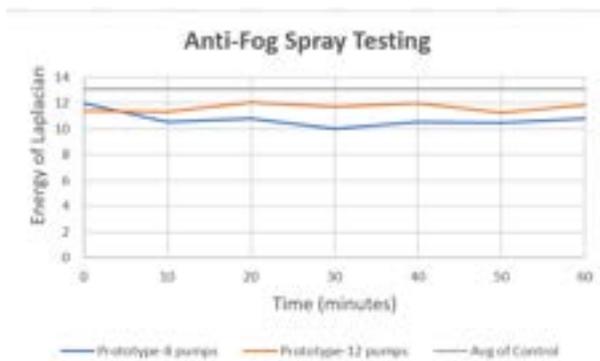
Title: MATLAB analysis of anti-fog testing

Date: 12/10/22

Goal: quantify the difference in optical quality over time while condensation forms

Content:

- the Energy of Laplacian of each image was measured in MATLAB
- this measures the intensity changes throughout the image; high energy indicates a clear image and low energy indicates a less clear image



- the above graph demonstrates how the 12 pumps had higher energy than that of the 8 pumps but still not as high as the control images
- the team could visibly see condensation quickly forming on the glass slides during both tests

Conclusion: the team decided that because of the condensation formation and low energy levels they would abandon the anti-fog spray and look to new methods to prevent/remove condensation



09/17/2021 Client Meeting #1 Introductions to Client/Project Details

MAYA TANNA - Sep 18, 2021, 1:00 PM CDT

Title: Client Meeting #1 Introductions to Client/Project Details

Date: 09/17/2021

Content by: Maya Tanna

Present: Sam Bardwell, Katie MCGovern, Maya Tanna, Caroline Craig, Olivia Jaekle, Ethan Hannon

Goals: To document the discussion with our client, Dr. Puccinelli, as well as the answers to our list of questions prepared for the meeting

Content:

Questions for Dr. Puccinelli

Overview of the Project:

Experimental Teaching Lab → Tissue engineering lab needs culture cells for the long term (*what is long term?*) that doesn't have a lot of money. Looking for a smaller, less expensive, and less bulky incubator that doesn't encompass the whole microscope or can be removed. Stage-top cell culture incubator. Grow cells and watch them over the course of time. Have to be able to stay alive with cell culture conditions for at least a week.

1. What is the budget for this project? **\$100**
 - a. Will this project be paid for using UW Funds? **Departmental teaching funds**
2. What is the device being used for, industry, research, etc?
 - a. **Used for teaching purposes, but if we get it right we can market this to other researchers**
3. What is our margin of error in regards to temperature, CO₂ levels, and humidity?
 - a. **37°C → look at industry standard for temp ranges**
 - b. **5% CO₂ → helps with buffering from sodium bicarbonate**
4. Is there a size constraint for the incubation chamber?
 - a. **Has to sit on microscope stage and hold a well plate that also doesn't interfere with the optics (ideal if both sides are transparent, but bottom must be transparent)**
 - b. **Needs to work with inverted microscope**
5. What are your preferred dimensions for the incubation chamber?
 - a. **Sits on microscope stage and holds well plate**
6. When you imagine the finished product, what color would you want it to be?
 - a. **No preference in color**
 - b. **Well plates are clear, black (stops contamination), and white (increases light).**
 - c. **Something that blocks out external light would be ideal, but is not required**
7. Could we test our design with live cells?
 - a. **Yes, Dr. P will give us some when/if we are ready**
 - b. **Use cells that are hard to kill → that's good for us**
 - c. **TELL HIM IF WE WANT THEM AFTER THANKSGIVING**
8. What are the most important design requirements/specifications (apart from the temperature, CO₂, and humidity level measurements provided)?
 - a. **Optical transparency, microscope stage (google that)**
9. How many devices should be created?
 - a. **Just one :)**
10. Are there any materials that you prefer we use?
 - a. **Nope :)**
11. How long will this device be used in the lab?
 - a. **Could be used up to two weeks, but shoot towards one week at a time.**
12. How often do you plan on using this device daily?
 - a. **Device would be used for one week at a time during tissue lab**

13. What is the shelf life of this product?

a. Long time → 10 years

14. What has been working well for previous projects? What hasn't?

a. Seal insulated box completely?

b. Sterilization is very important → autoclaving ideal but UV works too

15. Anything particular you would like us to continue with from past projects?

a. Temperature gradients are a large problem for cell cultures (reason for bulky products) look towards first project insulated box

16. What types of cell culture plates do you use?

a. What are their dimensions?

i. 6 Well plate, 24 well plate, 96 well plate → omnitrays?

ii. Standard petri dish

iii. Flasks → T25/T75 not really used but her

b. What type of medium do you use?

i. MEM

ii. 10% SPS and antibiotics

17. Will any other microscopes be used with this incubation chamber? Or, should it only be compatible with the inverted microscope?

Mainly inverted microscope

18. Should this device be ergonomic(able to move it on your own)?

a. Be able to carry it around and store it

b. Wires should not be hanging out freely

c. Easy to pick up and put away

Notes:

- CO2 humidifiers and such are done using wires and a breadboard
- No team has successfully created an incubator.
- Something that can be easily taken apart would be ideal
- Temp gradients with small amounts of liquid can be evaporated very quickly so humidity is a big issue

Research To Do for Week 9/17-9/24

- Materials
 - What can hold heat?
 - What is transparent?
- Industry Standards
 - What are the industry standards for margin of errors for temp, CO2, and humidity
 - What is the size of well plates and inverted microscope stages?
- Cells
 - Look up the biology and physiology of MEM
 - When does it evaporate?
 - What temps do we need to stay under?
 - What humidity is best for it?
- Temperature
 - How can we create a better temperature gradient?
 - How can we insulate in a small space?
 - Look towards less industry and more experimental research as to how we can heat things in a small space
- Sterilization
 - Autoclave
 - UV Sterilization
- Past Projects
 - Check out the older projects to see what other teams did

Conclusions/action items: Tailor research to these specifications and use this information to create the product design specifications document. Look into previous projects and determine what worked well and what led to less successful results.



09/28/2021 Client Meeting #2 Collecting Dimensions and Clarifying Project Details

SAMUEL BARDWELL - Sep 29, 2021, 11:27 AM CDT

Title: Client Meeting #2

Date: 9/28/21

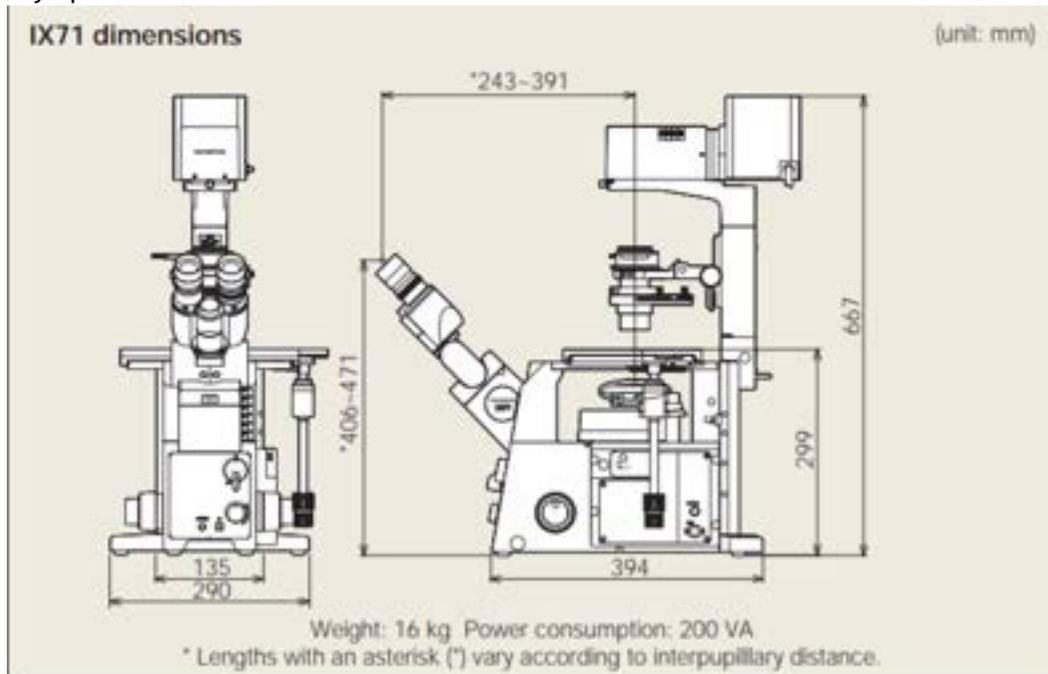
Present: Sam, Caroline, Ethan, Katie

Goals: To get a more in depth understanding of the project, tighten up loose ends, and get dimensions of the inverted microscope.

Content:

1. What is the exact model of inverted microscope for use? (for accurate dimensions)

1. Olympus IX71



2. Nikon Eclipse Ti- S

1. Don't want to change the distance sample is from the lens (32.40mm) **thickness**

2. **310 x 300 mm**

2. Could we use a laboratory CO2 gas line? Or, will an external CO2 gas supply be necessary to include in materials?

1. Tank with a regulator, hose into incubator

2. Don't need to purchase, readily available with hoses

1. What is the diameter of the hose? **7.16mm wide**

3. How many cell plates do you need in the incubator?

1. One - *Prefers just one well plate per incubator*

4. Would it be possible for us to test transparent materials with the microscope?

1. Optically clear enough?

2. Refraction of light?

3. Bottom of glass on multiwell plates.. Look into
4. YES ALL POSSIBLE
5. What is the use of the incubator during the week of class time?
 1. AN ENTIRE WEEK
6. Do you have any specifications in the margins from industry standard? Or, is the tolerance cells can handle acceptable?
 1. pH levels → CO2 levels, what is tolerance for a buffer?
7. What are the dimensions of the well plates? (Can look up online)
 1. length = 127.44 mm
 2. Width = 84.91mm
 3. Height = 21.60mm
8. What would be the ideal recovery time for internal conditions after opening the cell culture incubator "door"? (Flow rates)
 1. Five minutes after 30 second opening
9. Would you prefer manual CO2 addition, or an automatic regulation with sensors?
 1. Incubator itself has a valve and a sensor → *automatic preferred*
10. Is the budget for the final design, or does it include materials for preliminary designs?
 1. Yes but if the prototype works well then it can be flexible

Notes:

- Current incubator is water jacketed with co2 tank at ~10psi
- Microscope is able to lift head up so that we can fit the incubator in
-

Conclusions/action items:

We learned more about the intentions for the project and have a clear understanding of the route we will have to take. The design matrix will be updated with the new information after this meeting. More detailed Solidworks drawings can be made with the new dimensions of the project. A lot of the sensors and parts of the project that we were planning to buy are accessible from past projects and in the BME teaching lab.



11/02/2021 Client Meeting #3 Fabrication Updates

ETHAN HANNON (ehannon@wisc.edu) - Nov 03, 2021, 9:42 PM CDT

Title: Client Meeting #3

Date: 11/2/21

Content by: Sam & Ethan

Present: Sam & Ethan

Goals: To update the client on our position with the project and to receive more feedback on our incubator design.

Content:

- Thermistor to record temperature if the DH22 sensor does not work. Doesn't record humidity. Need a calibration curve
- The lens height is adjustable. He will get back to us with a height at the best refractive value. This will help solidify the dimensions of the incubator box so it can be 3D printed.
- We have the glass plates but they are very small. Will have to update box drawings to account of this change. Intended plan is to have a covering and the set the glass plate on top of the covering to allow transparency.
- Can use any tubing found in the old ECB lab room. Preferably 1/4 to 3/8 inch tubing. 1/4 inch tubing would work best with push adaptors (need to find a way to connect it to heated water incubator). 3/8 may work better for connection to heated water pump.
- He will set aside some cells for us to use to test with in the future.
- He already ordered a new DH22 temperature and humidity sensor to see if the old one was truly faulty.
- Lots of different adaptors to look at. Hose adaptors, push connectors and the gray connector for the heated water bath.



Figure 1: Different views of gray heated water pump adaptors.

Ethan found links online to order if need be:

For the coupling body: https://products.cpcworldwide.com/en_US/ProductsCat/NS4/NS4D17006

For the valve coupling insert: https://products.cpcworldwide.com/en_US/ProductsCat/HFC12/HFCD22612



Figure 2: Push adaptor for 1/4 inch tubing. Very easy to use.

- Avoid buying from ACE hardware because we can't get reimbursed. If anything needs to be ordered go to Puccinelli and he can have it within a couple of days.

Conclusions/action items:

SOLIDWORKS drawings will be updated to account for the glass dimensions. Testing on the glass can be conducted since some materials have arrived. Sensors will continue to be tested. May have to go a different temperature sensing route. Adaptors will be the main focus for the fabrication team and to figure out the best tubing to use to heat the inside of the cell culture incubator.



09/17/2021 Advisor Meeting #1

MAYA TANNA - Sep 25, 2021, 9:30 AM CDT

Title: Advisor Meeting #1

Date: 09/17/2021

Content by: Maya Tanna

Present: Sam Bardwell, Katie MCGovern, Maya Tanna, Caroline Craig, Olivia Jaekle, Ethan Hannon

Goals: To document what was discussed at our first advisor meeting with Dr. Melissa Kinney

Content:

Advisor Meeting Notes 9/17/2021

- Prof. Kinney has a lot of experience using cell incubators
- Logistics
 - Find out where we will go for the 2 hours for presentations, show and tell, and final
 - Friday Meetings: 30 minute meetings to productively ask questions, connect to resources, brainstorm ideas. Send questions to everyone in advance for Friday meetings so that we can come to the meeting prepared for the questions we need to tackle. Weekly Recap, Goals, Discussion, and Problems we are running into.
 - Weekly Reports: send to both Prof. Kinney and Dr. P
 - Address the email to Dr. P
- Advice
 - Communication: keep communications open at all times
 - Delegation
 - Fast Paced Class = TIME MANAGEMENT
 - Set concrete goals and intermediate deadlines
 - Make sure that your goals have an actionable concrete outcome and a deadline for that outcome
 - *Targeted Research and SMART Goals*
 - Be as specific as possible with your PDS
 - Quantitative more than qualitative
- Grading
 - Using Canvas More
 - Final Deliverables - weighted most heavily
 - Preliminary Report is graded as if it was a final report (5% of grade)
 - Entire team gets roughly the same grade
 - Individual grades
 - Peer evaluations
 - Lab notebooks
 - Course deliverables
 - **Notebooks** (preliminary 5% and final 25%)
 - **Oral presentation** (preliminary 5% and final 20%)
 - **Written documentation** (preliminary 5% and final 25%)
 - Project output and team function
 - **Prototype** construction and evaluation (client satisfaction 5%)
 - **Participation** (contributions to weekly advisor meetings, group meetings, and team objectives, peer/self assessment 10%)
 - Technical leadership and outreach (for 402)

Conclusions/action items: Make sure to keep consistent communication with Dr. Kinney. It would also be helpful to send out weekly meeting agendas for meetings with her so that everyone on the team is on the same page and questions/clarifications can be dealt with effectively.



09/24/2021 Advisor Meeting #2

MAYA TANNA - Sep 25, 2021, 9:31 AM CDT

Title: Advisor Meeting #2

Date: 09/24/2021

Content by: Katie McGovern

Present: Sam Bardwell, Caroline Craig, Dr. Kinney, Maya Tanna, and Ethan Hannon

Goals: To recap our team accomplishments this week and discuss PDS and design matrix.

Content:

9/24/2021 Advisor Meeting Notes

- Refractive index in glass optical properties
- Look into the glass that they use on the bottom of multi-use well plate
- Maybe 3D print the sides and have optically transparent tops
- Ask about Routine Use
 - Are we using it for multiple labs for 3 hours only?
 - Are we using it for multiple days in the same lab?
- Loosen our variation parameters
 - What level of tolerance will we allow to meet Dr. P's specifications rather than industry standards?
- Size Requirements
 - Meet on Tuesday with Dr. P to get size requirements
 - More specific size of microscope and well plates as they are all the same size it just depends on the amount of wells
- Opening and closing the microscope
 - How to keep the gas in when the microscope slides are switched?
 - Sealed?
 - How long will it take to get back to necessary parameters?
 - Flow rate and time to get to stabilization → may need to do during testing
- CO₂
 - Comes in a tank with a regulatory on it, there is a hose on the side that you plug into the incubator; usually with a feedback loop on them
 - Tanks already have regulators on them :)
- How will we tackle all different pieces
 - Main goal: how to keep temp even
 - Water Jacketed or Direct Heat
- Stage-top Incubators

- 2 competing designs that have stage-top incubators
 - wet sponge in incubator and whole incubator is placed into conditions for temperature so temp regulated within environment
 - Use outside humidifier to control the inside
- What is the range of pH that we need to keep and will this affect if we heat the incubator manually vs mechanically?
- Design Matrix
 - Figure out where the key parts are and put the weights in
 - Better figure out brainstorming to multi-aspect designs

Conclusions/action items:

- Questions for Puccinelli
 - Ask about Routine Use
 - Are we using it for multiple labs for 3 hours only?
 - Are we using it for multiple days in the same lab?
 - How will flow rates come into play with a very small box? Is there a required flow rate? Should we include a specification for this?
 - Meet on Tuesday with Dr. P to get size requirements
 - Look into materials and equipment already in tissue culture lab



10/01/2021 Advisor Meeting #3

MAYA TANNA - Oct 10, 2021, 8:35 AM CDT

Title: Advisor Meeting #3

Date: 10/01/2021

Content by: Maya Tanna

Present: Maya Tanna, Sam Bardwell, Katie Mcgovern, Caroline Craig, Olivia Jaekle, Ethan Hannon

Goals: To document notes and conversation from our third advisor meeting with Dr. Kinney

Content:

10/1/2021 Advisor Meeting #3

- Recap of weekly events
- Get preliminary report written well!!
 - Prelim report is very similar to final with the exception of testing and results
- Design Matrix
 - Previous Project Extension
 - Heater Pumped Incubator
 - Dr. Kinney likes that idea
 - Water level will be very small to minimize risk of leakage
 - Assuming that with materials we can seal the box
 - Load the plate in from the top
 - Either slot, snap, or hinge
 - **Can we do the math to determine how much volume of water needs to be heated to get to 37°C. Depends as well on the tubing.**
 - **How long does it take to get to that equilibrium?**
 - *Maybe leave a port or a sensor so that we can measure temp*
 - *Easy to design ports with 3D printed material*
 - Shelving Design
 - Do we brainstorm more based on priority now that we have met with the client?
- Autoclaving will affect material choice
 - **How hot does an autoclave get?**
 - **What is the pressure of an autoclave?**
 - **Autoclaving doesn't always keep material properties?**
 - **We can test this in the lab**
- How will we seal it?
 - Glass on the bottom will be very secure → glue like
 - Glass on the top → **need to discuss how the top will fit together (sliding versus hinge)**
 - **Maybe using a rubber casket, like a water bottle cap.**
 - **Lip in top of box with a cap?**
- We can access sensors from old bme labs
 - Still double check that we could build it with cheapo sensors
 - Most incubators do not tell humidity levels → people just put water in and assume that it will be enough
 - Will we get condensation on the inside of the box?

- NO! → only time they get condensation is when the pan goes dry so as long as there is an equilibrium we should not be getting active condensation

Conclusions/action items: Use this feedback when writing the preliminary presentation and report. Start determining materials and think about how all the design components will come together.



10/08/2021 Advisor Meeting #4

MAYA TANNA - Oct 22, 2021, 12:22 PM CDT

Title: Advisor Meeting #4

Date: 10/08/2021

Content by: Maya Tanna

Present: Maya Tanna, Sam Bardwell, Katie Mcgovern, Caroline Craig, Olivia Jaekle, Ethan Hannon

Goals: To document notes and conversation from our fourth advisor meeting with Dr. Kinney

Content:

10/8/2021 Advisor Meeting Notes

- Comments on general update
 - 3D printing - incubator box will be printed
 - Order quickly because shipping is taking a long time
- Design Matrix
 - Next step is figuring out how to put sensors inside th incubator
- Observed Geometry of the box
 - Make sure we include in our presentation of how we will put this together
- Sensors
 - Temp definitely maybe even a CO₂, but less important
 - Temp gage is an output sensor → sensor inside incubator that figures out CO₂, percentage and opens the solenoid when CO₂ levels drop or increase too rapidly
 - Automatic not manual
- Multiple aspects of the project
 - Building the box
 - Figuring out the sensor/
 - nternal environment maintenance
- Q&A
 - Any recommendations to get started on?
 - TESTING PLAN
 - Try to break up the project so that we are never waiting on someone else
 - Send us the preliminary presentation on TUESDAY

Conclusions/action items: Use this feedback when writing the preliminary presentation and report. Start determining materials and think about how all the design components will come together. Also, divide up into subcommittees: 1 for fabrication, 1 for sensor coding, and 1 for ordering materials/writing test protocols.



10/22/2021 Advisor Meeting #5

MAYA TANNA - Oct 22, 2021, 12:22 PM CDT

Title: Advisor Meeting #5

Date: 10/22/2021

Content by: Katie Mcgovern

Present: Maya Tanna, Sam Bardwell, Katie Mcgovern, Caroline Craig, Olivia Jaekle, Ethan Hannon

Goals: To document notes and conversation from our fifth advisor meeting with Dr. Kinney

Content:

10/22/2021 Advisor Meeting #5

- Impressions on the Prelim Presentations
 - Talk more about Client maybe → needs of client
 - Bit on on how we picked design criteria
 - Stood out in quantitative data
- Poster Presentation at the end of the semester
 - Still debating whether this will be in person poster or a presentation type thing
- Where we are at in the design process
 - Finalized prelim deliverables
 - Finished the materials purchase request
 - This weekend: Sam and Maya are checking out adaptors for tubing and such
 - Dr. Kinney recommends Ace Hardware in Hildale
 - Split teams up
 - Arduino
 - Materials and Testing protocols
 - Fabrication
- Materials Purchasing List
 - Asked Dr. P if he has any prior materials
 - Follow up email
 - Try to move forward with confidence otherwise
 - There is a way to reimburse if we do choose something
- Next week we will discuss the report
- **Show and Tell is in 2 weeks**

Conclusions: Reach out to Dr. Puccinelli again to move forward with material purchasing. Take pictures of parts from Ace Hardware, Menards, and Home Depot for more info on adaptors and tubing.



11/12/2021 Advisor Meeting #6

MAYA TANNA - Nov 12, 2021, 1:11 PM CST

Title: Advisor Meeting #6

Date: 11/12/2021

Content by: Katie Mcgovern

Present: Maya Tanna, Sam Bardwell, Katie Mcgovern, Caroline Craig, Olivia Jaekle, Ethan Hannon

Goals: To document notes and conversation from our sixth advisor meeting with Dr. Kinney

Content:

See attachment below.

Conclusions: Edit and execute test protocols. Create instructions for use document. Work on full system printing/assembly as well as ensuring that the code outputs correct values for CO2. Investigate CO2 sensors and go in depth with this component of the project.

MAYA TANNA - Nov 12, 2021, 1:11 PM CST

Advisor Meeting 11/12/2021

- Review progress
- The research plan is now finalized for the hardware
 - o Talk to the 4 sensor team to get embedded for the hardware
 - o The program is now done on the sensor being printed
- Polystyrene Testing
 - o One team later will run some tests
 - o Need to do calibrations or test the temperature stability and accuracy
- Design protocol
 - o How to check the the hardware without getting more data?
 - Use a digital thermometer on the glass (used for the equipment)
 - Look to find something like for options
 - o Create a testing protocol for CO2
 - o Calibrate the percentage of the CO2 in new sessions or very difficult as its phase based
 - o Automatic control flow by send to the controller
 - Look at the engineer
 - Program to take
 - Design protocol
 - Look at a code that will require some the control needs value probably to create it
 - Value = send one from each CO2 controller program
 - o Read the CO2 and make to open and close the valve
 - CO2 value of things in the background
 - Look at how to use when we need to do
 - o Glass testing
 - Optimization need for optimal information
 - How get some of cells with and without glass of things if we have many with you can look at edge with and edge stability using a platform for working with
 - o Recovery testing period
 - Report the graph of internal conditions in time
 - How to get some of the for testing
- Fabrication
 - o How to get the or how to get it to make to get things in different cases
 - o Side what materials is
 - o If get better how for the fabrication -- the elements available to keep the sensors dry
 - To make or how prevent fog a lot of hardware is

[Download](#)

Advisor_Meeting_11_12_2021.docx (564 kB)



11/19/2021 Advisor Meeting #7

MAYA TANNA - Nov 25, 2021, 2:41 PM CST

Title: Advisor Meeting #8

Date: 11/19/2021

Content by: Katie

Goals: To document advice given by Dr. Kinney at our weekly meeting

Content:

See attachment below.

Conclusions/action items: Execute testing and heavily investigate the CO2 tank situation.

MAYA TANNA - Nov 25, 2021, 2:41 PM CST

11/19/21 Advisor Meeting Notes.docx

- Check to see if the video clips have been sent to video to test the glass
- Do everything needed
- Review
- Please to review the air circulation and if at least suspension changes
- CO2 tank and tank
- Not too much progress

[Download](#)

11_19_21_Advisor_Meeting_Notes.docx (6.67 kB)



12/03/2021 Advisor Meeting #8

Katie Day - Dec 08, 2021, 9:16 PM CST

Title: Advisor Meeting #9

Date: 12/0/2021

Content by: Katie

Goals: To document advice given by Dr. Kinney at our weekly meeting

Content:

See attachment below.

Conclusions/action items: Execute testing and heavily investigate the CO2 tank situation.

Katie Day - Dec 08, 2021, 9:16 PM CST

CO2 tank meeting notes 99

- Testing
 - CO2 and Temp sensing are complete
 - CO2 tanking will be completed by Monday 12/13
 - Customer contacted 12/13
 - Dr. P sent a video reference to use it
- The Box
 - Everything is in place just need the wiring
 - Checked for alignment
- CO2
 - Just pump it in to see if the sensor and the tank
 - Need a warning sensor currently just to get our own CO2 tank
- Pressure transducer
 - Day 11
 - We have wires to get all ready
 - Doing physical structure of insulator
 - Physically in the way similar to power presentation
 - Single color cables
 - There will be a gel insulation
- Electrical schematic
 - Do we need to add to other electrical stuff?
 - Yes
 - Tanking (12/13)
 - Tank materials
- Electrical Test should be used with CO2 tanking
 - Show that the system shows that they are not different
- There will be a video at the end of the semester and we can provide to continue the project

[Download](#)

12_03_21_Advisor_Meeting_Notes_9.docx (7.24 kB)



09/20/2021 Team Meeting #1 Working/Finalizing PDS

MAYA TANNA - Sep 20, 2021, 5:20 PM CDT

Title: Team Meeting #1 Working/Finalizing PDS

Date: 09/20/2021

Content by: Maya Tanna

Present: Sam Bardwell, Katie MCGovern, Maya Tanna, Caroline Craig, Olivia Jaekle, Ethan Hannon

Goals: To document the progress we made on the product design specifications document as a team

Content:

1. Met to discuss upcoming project deadlines and initial research done by each member of the team
2. Everyone read over the PDS and made last edits as well as references
 1. Final and submitted draft is below

Conclusions/action items: We will meet next week to start coming up with ideas for the design matrix and go over the team's relevant research. We will also continue to update the PDS if design or client requirements change throughout the semester.

MAYA TANNA - Sep 20, 2021, 5:23 PM CDT

Product Design Specifications



Microscope Cell Culture Incubator

DATE: 200109
24 September 2021

Class: Dr. John Pascard
University of Wisconsin-Madison
Department of Mechanical Engineering

Team:

Katie MCGovern
Sam Bardwell
Maya Tanna
Olivia Jaekle
Caroline Craig
Ethan Hannon

[Download](#)

Product_Design_Specifications.pdf (219 kB)



10/04/2021 Team Meeting #3 Finalizing Design Matrix

MAYA TANNA - Oct 10, 2021, 8:58 AM CDT

Title: Team Meeting #3


Date: 10/04/2021

Content by: Maya Tanna

Present: Katie McGovern, Sam Bardwell, Maya Tanna, Caroline Craig, Ethan Hannon, Olivia Jaekle

Goals: To finalize our design matrix and start evaluating potential design solutions.

Content:

									
			Past Project Refurbished	Heated Water Pump Incubator	Shelving Incubator				
Rank	Criteria	Weight	Score (10 max)	Weighted Score	Score (10 max)	Weighted Score	Score (10 max)	Weighted Score	
1	Internal Environment	25	9	23	7	18	5	13	
2	Microscope Compatibility	20	10	20	10	20	10	20	
3	Accuracy and Reliability	20	7	14	8	16	4	8	
4	Ergonomics	15	5	8	8	12	4	6	
5	Cost	10	2	2	4	4	3	3	
6	Life in Service	5	10	5	10	5	10	5	
7	Safety	5	10	5	10	5	10	5	
		Sum	100	Sum	76	Sum	80	Sum	60

Conclusions/action items:

Begin working on preliminary presentation and report and further research different materials.

Material Brainstorm

- 3D images around the site
- [Glass, Acrylic, Silver, Steel, Lead, Aluminum, Titanium, Inconel, Stainless Steel, Polycarbonate, Kevlar](#)
 - Can be used on the sides on the inside where the water is because it will insulate heat if surrounded in a black surface - 3D print is black
- [Insulated Pipe, Insulated Cable, Insulated Wire, Insulated Cable, Insulated Wire](#) - both
 - Check for the required features
 - Make the glass top look like a replacement lid
 - Make it look like the original
 - Use a change and a seal to cover
- High-temperature (for insulation) and water resistant
- [Carbon Fiber, Kevlar, Fiberglass, etc.](#) - 3D print
 - Check for overall easy making and installation of the whole lid
- 3D 4, 5

Material Requirements

- Waterproof - can hold the water
 - [Epoxy resin](#) - seal the edges of the epoxy
 - Another way for the top glass layer
- Can hold a water tank
 - [Insulated Pipe, Insulated Cable, Insulated Wire, Insulated Cable, Insulated Wire](#)
 - This needs a heat type thing to connect to the water tank



- [Insulated Pipe, Insulated Cable, Insulated Wire, Insulated Cable, Insulated Wire](#)

[Download](#)

Materials_and_Heating_Brainstorm.docx (612 kB)



10/11/2021 Team Meeting #4 Finalizing Presentation/Organizing Subcommittees

MAYA TANNA - Oct 18, 2021, 5:28 PM CDT

Title: Team Meeting #4 Finalizing Presentation/Organizing Subcommittees

Date: 10/11/2021

Content by: Maya Tanna

Present: Katie McGovern, Sam Bardwell, Maya Tanna, Caroline Craig, Ethan Hannon, Olivia Jaekle

Goals: To finalize our presentation and make revisions according to Dr. Kinney's feedback

Content:

Hi Katie,

Great job – my comments are below:

- Include your advisor/client and the date on your title slide
- You don't need a presentation overview slide
- Great job with a quantitative PDS!
- Competition: are there other small/low cost incubators that have been developed outside of UW BME design?
- Make sure that the labels on your figures are large enough to read easily (Fig. 5 labels are really small)
- Include a slide describing your design criteria and how they were chosen
- Label the dimensions and points of interest on all of your figures (i.e. Fig 6)
- It might be helpful to include a separate slide describing the workflow for how it will be used

Conclusions/action items:

To finalize the preliminary report and begin compiling materials for purchasing.



10/18/2021 Team Meeting #5 Materials Purchasing Organization/Final Edits on Preliminary Report

MAYA TANNA - Oct 18, 2021, 5:31 PM CDT

Title: Team Meeting #5 Materials Purchasing Organization/Final Edits on Preliminary Report

Date: 10/18/2021

Content by: Maya Tanna

Present: Katie McGovern, Sam Bardwell, Maya Tanna, Caroline Craig, Ethan Hannon, Olivia Jaekle

Goals: To finalize our report and gather all the materials for purchasing together in a document

Content:

Progress is below

Conclusions/action items:

To finalize the preliminary report and purchase materials.

MAYA TANNA - Oct 18, 2021, 5:31 PM CDT



[Download](#)

Materials_Purchasing_Request_-_Microscope_Cell_Culture_Incubator.docx (48.3 kB)



10/18/21 TeamLab Meeting Summary

SAMUEL BARDWELL - Oct 19, 2021, 1:48 PM CDT

Title: TeamLab Meeting Summary

Date: 10/18/21

Content by: Sam

Present: Sam & Ethan

Goals: To confirm the intended design for the incubator on Solidworks is feasible and what type of adaptors to use between the tubing.

Content:

Notes:

Pipe threading

Rubber Strips

Epoxy is available

Conclusions/action items:

The TeamLab professional saw no problems with our intended design for the project. The biggest questions were surrounding the adaptors between the tubing of the metal and heated water pump. There were a couple ways to go about connecting these and one would be to thread the pipe and the screw on an adaptor to one side and then epoxy the other. The next idea was to just epoxy the metal side of the adaptor and connect the other. The adaptor would have to have a ribbed cone shape for the rubber tubing from the heated water pump to being pushed on. This could then be surrounded with a zip tie to make sure it stays on when the water is being pumped. The professional also said there are different types of epoxy's that would work better for different materials and some research should be done to find which epoxy to use.



10/23/2021 Ace Hardware Visit

MAYA TANNA - Oct 27, 2021, 11:08 AM CDT

Title: Ace Hardware Visit

Date: 10/23/2021

Content by: Maya

Present: Maya & Sam

Goals: To document findings on part specifications from Ace Hardware as well as future action items based on that information

Content:



Rubber water hose heats up to 150 degrees Fahrenheit (we are looking for 98 degrees Fahrenheit) - research if it is effective.

Conclusions/action items: Do more research on vinyl tubing and rubber water hoses (fuel line hose). Look into copper rust specifications to determine feasibility of using copper.

MAYA TANNA - Oct 27, 2021, 11:29 AM CDT



[Download](#)

Ace_Hardware_Visit_Pictures.docx (3.97 MB)



11/05/2021 Show and Tell Feedback

MAYA TANNA - Nov 05, 2021, 2:40 PM CDT

Title: Show and Tell Feedback

Date: 11/05/2021

Content by: Maya

Present: Whole Team

Goals: To document feedback received from other teams regarding sensor and tubing placement

Content:

- Zig zag needs pegs to hold in place
- Sensors on the top
- Carbonate water
- Hydrophilic materials
- Just use waterproofed sensors? RESEARCH
- CO2 sensor waterproofing test protocol
- Zig zag best idea, but secure
- Tubing: twice wrap around, tubing coming out of incubator above water
- Waterproof fabric (rain coat material)
- Randomized zig zag
- Thermistor, coating that works with temperature but waterproof
- Get curve and calibration stuff from class
- Snail system with tubing
- Look into ideas for water proofing the sensors (rubber, styrofoam)
- Test coiled vs. uncoiled tubing (tubing test protocols)

Conclusions/action items: Use a thermistor for measuring temperatures. Write test protocols for tubing and CO2 sensor waterproofing. Use snail system with tubing.



09/28/2021 Design Matrix

Olivia Jaekle - Oct 11, 2021, 5:03 PM CDT

Title: Design Matrix


Date: 9/28/2021

Content by: Caroline Craig, Ethan Hannon, Olivia Jaekle, Maya Tanna, Katie McGovern, Sam Bardwell

Present: Team

Goals: To document design matrix and provide reasoning for rankings.

Content:

Rank	Criteria	Weight	 Past Project Refurbished		 Heated Water Pump Incubator		 Shelving Incubator	
			Score (10 max)	Weighted Score	Score (10 max)	Weighted Score	Score (10 max)	Weighted Score
1	Internal Environment	25	9	23	7	18	5	13
2	Microscope Compatibility	20	10	20	10	20	10	20
3	Accuracy and Reliability	20	7	14	8	16	4	8
4	Ergonomics	15	5	8	8	12	4	6
5	Cost	10	2	2	4	4	3	3
6	Life in Service	5	10	5	10	5	10	5
7	Safety	5	10	5	10	5	10	5
	Sum	100	Sum	76	Sum	80	Sum	60

- Internal Environment
 - For this criteria, the Past Project Refurbished scored the highest since the previous BME groups have already done testing on the device's ability to regulate temperature, CO₂, and humidity. Our team believed that further work on this system could have improved the device's ability to maintain these conditions by improving the materials. For these reasons, we gave Past Project Refurbished a 9.
 - The Heated Water Pump Incubator scored the next highest because our team believes improving upon previous BME groups' designs by using a heated water tube would benefit the ability to create a better cell culture environment. It scored lower than the Past Project Refurbished design because we would not have the previous testing to use. For these reasons, we gave Heated Water Pump Incubator a 7.
 - Finally, the Shelving Incubator scored lowest with a 5 because the ability of our team to maintain the conditions once the drawers were pulled out had not been completely understood.
- Microscope Compatibility
 - All designs scored a 10 in microscope compatibility because each design was created and could successfully be used with an inverted microscope.
- Accuracy and Reliability
 - For this criteria, our team scored the Heated Water Pump Incubator highest. We believe that the finalized design would have a more reliably designed system for the intended use of the incubator with the materials and external devices we plan to use. For this reason, gave this design an 8.
 - The Past Project Refurbished design scored the next highest with a 7. Like the Heated Water Pump Incubator, the Past Project Refurbished design would have improved upon materials in comparison with previous BME projects, but the mechanics of the system would not be as reliable as the other incubator.
 - The Shelving Incubator received the lowest score of 4 because altering the shape of the environment by opening a drawer would be difficult to maintain accurate internal conditions, and the size of the machine may hinder its reliability in reading accurate conditions. Also, moving components are more susceptible to wear and tear making it less likely to live through its self-life
- Ergonomics
 - Our team scored the Heated Water Pump Incubator highest for this criteria, again because its materials and components would allow it to function the best in comparison with our other designs. For this reason, it scored an 8.
 - The Past Project Refurbished design scored a 5 because the design components implemented by previous BME teams that we planned on keeping the same would not function in maintaining internal environment conditions as the Heated Water Pump Incubator could.

- Finally, the Shelving Incubator scored lowest with a 4 because it would be the most difficult to use with having to pull out drawers each time one wanted to view a sample.
- Cost
 - All the designs scored low for cost because our team's smaller budget will be difficult to stay in range with. The Heated Water Pump Incubator scored the best with a 4 because lots of the components we plan on using will be provided to us. Our biggest difficulty in staying within the budget will be limiting the need to repurchase materials wasted in prototyping.
 - The Past Project Refurbished design scored a 3 because components of the previous design would be reused, but the components we plan on replacing would end up being more expensive than just creating the Heated Water Pump Incubator design.
 - The Shelving Incubator scored lowest with a 2 because its size would increase the cost and create a greater likelihood to go over budget if lots of prototypes are made.
- Life in Service
 - All the designs scored a 10 for Life in Service because they were designed with the intent of functioning for a week period of time every year for 10 years.
- Safety
 - All the designs scored a 10 for safety because the components involved in their designs would not be harmful to the user in any way.

Conclusions/action items:

Based on this design matrix, our team will be moving forward with creating the Heated Water Pump Incubator for our client. This design was ranked the reliable, ergonomic, and cost-effective in comparison with the other designs. The design will include a slot for the well plate, a tube containing heated water to maintain a 37°C temperature and assist in evaporation, and a water well for evaporation water to maintain high humidity. The dimensions of the incubator will match the size of the microscope stand, or it will go over the edges slightly, and the height will not exceed the lowest point of the top light microscope component. Finally, sensors compatible with Arduino will be used to regulate the internal conditions.



10/19/21 Preliminary SolidWorks Incubator Design

SAMUEL BARDWELL - Oct 19, 2021, 1:22 PM CDT

Title: Preliminary SOLIDWORKS Incubator Design

Date: 10/19/21

Content by: Sam

Goals: To create a detailed Solidworks assembly and drawing of the proposed incubator design.

Content:

Item NO.	Item Description	Dimensions (mm)	QTY.
1	Top glass plate	250 x 200 x 5	1
2	Sealed glass plate holder	260 x 210 x 6	1
3	Metal tube for water	$\phi = 7,16$	1
4	Outer box of incubator	250 x 200 x 28	1
5	Inner box of incubator to hold cell plate	140 x 96 x 18	1
6	Lower glass plate	250 x 200 x 5	1

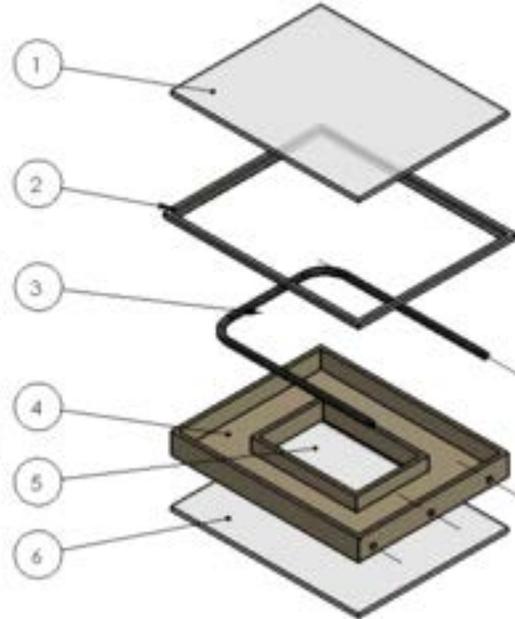


Figure 1: Exploded view of the Solidworks drawing showing the part names and descriptions.

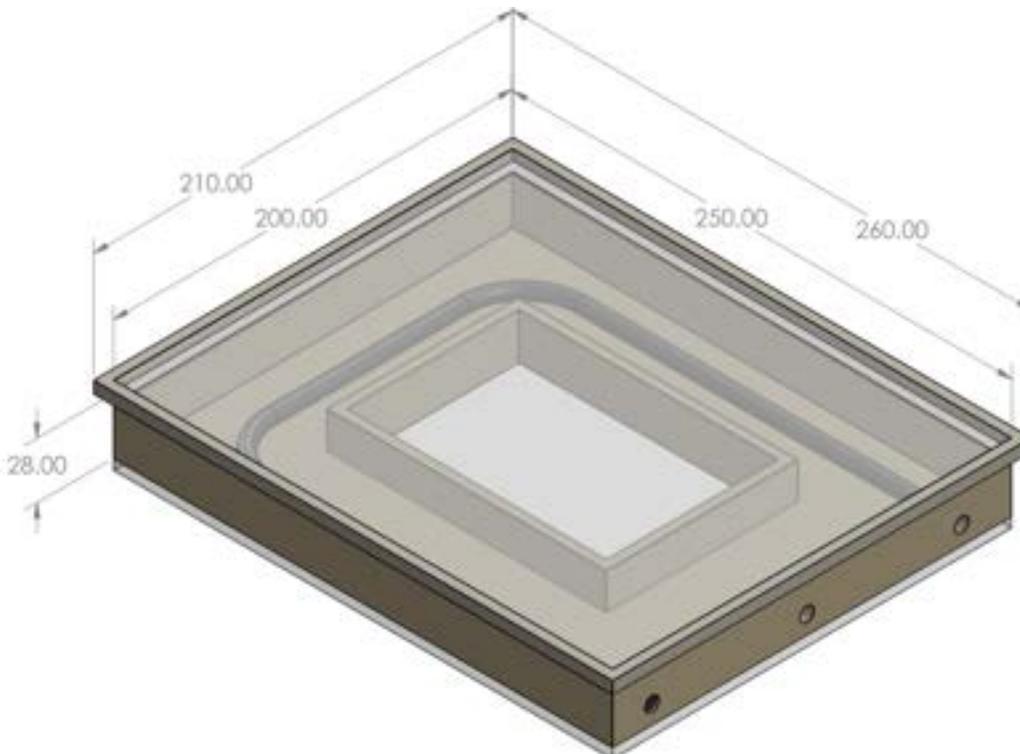


Figure 2: Collapsed view of incubator with dimensions of the box.

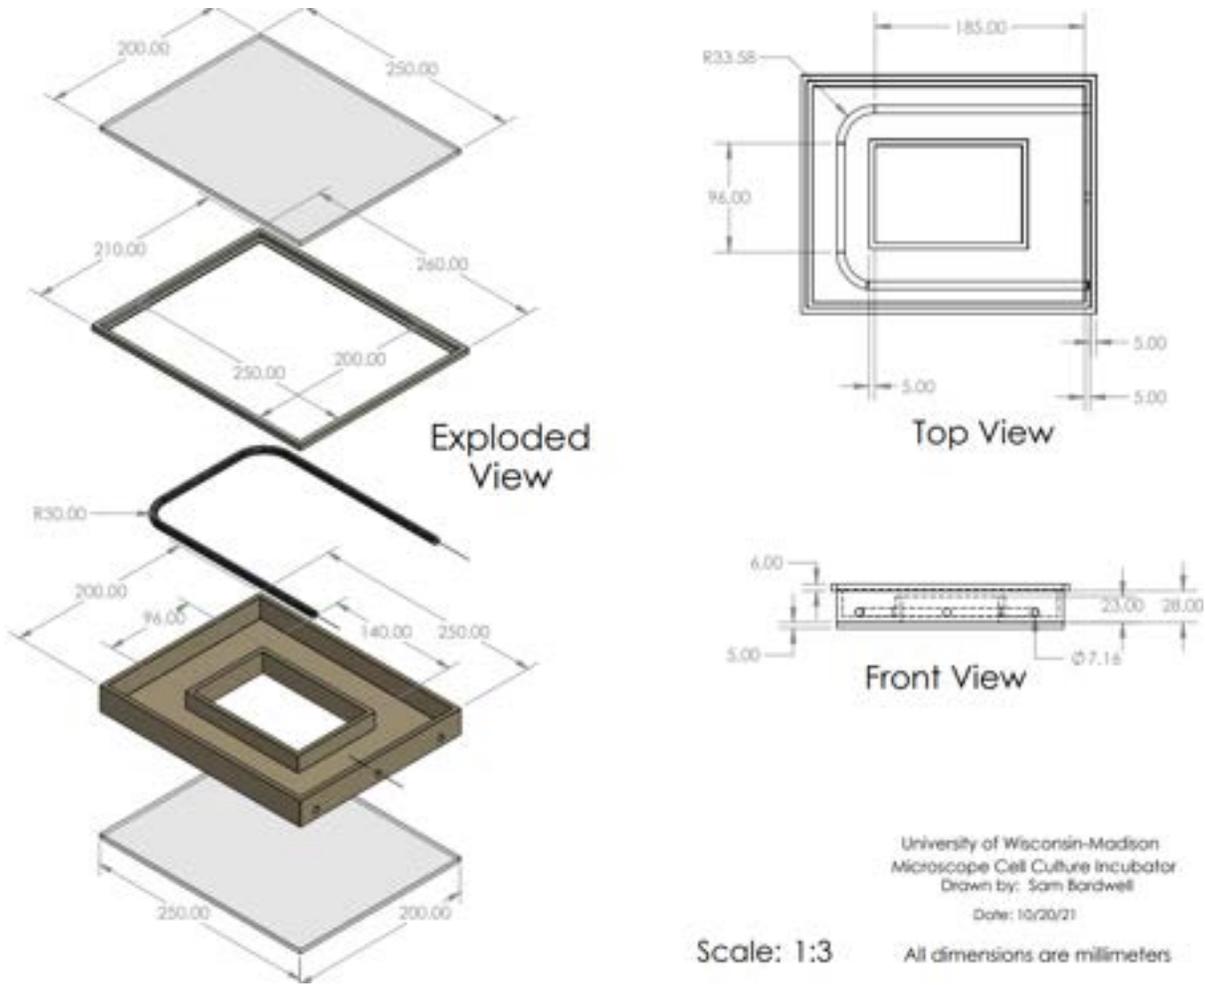


Figure 3: Solidworks drawing showing more detailed dimensions of all the parts in the incubator.

Conclusions/action items:

This is the preliminary design we are going to continue going forward with. The next step are to obtain the materials needed to fabricate the incubator. Once materials arrive, final touches and dimensions will be updated to the Solidworks design and then the box will be 3D printed at the UW - Madison Makerspace.



11/05/2021 Show and Tell Preparations

MAYA TANNA - Nov 05, 2021, 2:54 PM CDT

Title: Show and Tell Preparations

Date: 11/05/2021

Content by: Maya/Caroline/Katie

Present: Whole Team

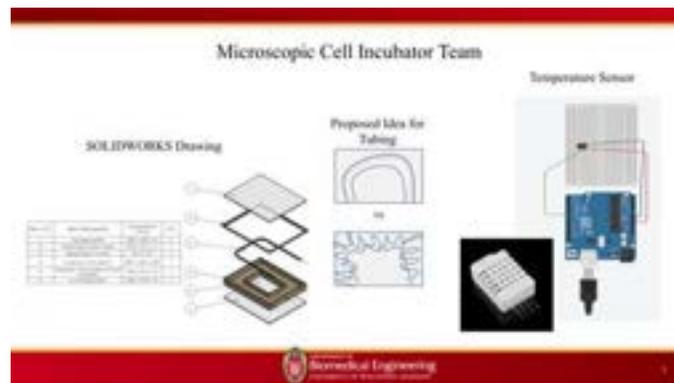
Goals: To document work done to prepare for show and tell

Content:

Hi everyone! Our team has been tasked with developing a low-cost cell culture incubation chamber that is compatible with an inverted microscope and capable of live-cell imaging culture plates. The incubator must be able to maintain an internal environment of 37°C, 5% CO₂, and 95-100% humidity without compromising the integrity of the microscope's optics or functionality. Our final design consists of a heated water pump where a conducting plastic tube will be wrapped around the inside of the incubator and connected to a heated water pump that will be set to 37°C. The inside of the incubator will be filled with water, submerging the plastic tubing, allowing the internal environment to be heated by conduction as well as increasing the humidity to 95% or higher. The incubator box will also include a tube connector to allow CO₂ gas to be pumped in. Lastly, a separate box will be placed inside the incubator to allow for wiring and sensors to be inside the internal environment. The sensors will be connected to an Arduino microcontroller where temperature, humidity, and CO₂ levels will be collected and analyzed. Our call to action is to ask for your help on how we can arrange the plastic tubing or sensors in order to achieve a homogeneous temperature environment.

Conclusions/action items: Use feedback from show and tell to drive the remainder of the semester and continue testing/fabrication of device.

MAYA TANNA - Nov 05, 2021, 2:54 PM CDT



[Download](#)

Show_and_Tell_Presentation.jpg (55.5 kB)



10/18/2021 - Future Expenses Table

Caroline Craig - Oct 18, 2021, 7:26 PM CDT

Title: Future Expenses Table

Date: 10/18/2021

Content by: Team

Present: Team

Goals: To document and update the expenses table with purchases throughout the fabrication process.

Content:

Item	Description	Manufacturer	Part Number	Date	QTY	Cost Each	Total	Link
Category 1 : Incubator								
3D Printed Casing	for sides of incubator	Makerspace			1	\$20.00	\$20.00	
Transparent Cover Plates	top and bottom of incubator	Radnor	64005034		2	\$1.04	\$2.08	https://www.ainos.com/
Plastic Latches	secure lid to incubator	Cambro	Cambro 60264		4	\$4.69	\$18.76	Cambro 60245 2 Hole Pla
Rubber Lining Tape	create tight seal between lid and incubator	Makerspace			1	\$0.00	\$0.00	
Insulating, Waterproof Mat	lining the 3D printed sides of the incubator	Makerspace			1	\$0.00	\$0.00	
Category 2 : Components								
3/8x12 Stainless Steel Tube	heated water will flow through	K & S Precision Metals	87119		1	\$6.00	\$6.00	LINK
3/8 in. Compression Brass Coupler	to connect the stainless steel tube to water pump	Everbuilt	207176323		2	\$3.65	\$7.30	LINK
1.5mm Tube Connector	connection between CO2 tank and incubator	Fisher Scientific	35031		1	\$14.96	\$14.96	LINK
Arduino 2x16 character Display		MIDAS	7773012		1	\$12.71	\$12.71	Alphanumeric LCD
Arduino Operational Amplifier		ONSEMI	LM324ADR2G		1	\$0.28	\$0.28	Texas Instruments Genesi
Arduino SD card logging shield		VELLEMAN	WP304		1	\$4.01	\$4.01	SD card logging shield V1
							TOTAL:	\$86.10

Conclusions/action items:

The items documented in the table are potential future purchases for our team. A list including these materials has been sent to the client for purchasing, however, the stainless steel tube and 1.5mm tube connector are still being reviewed for potential cheaper or free options through the client. Other components are being reused from previous team's projects, and improved rubber lining tape and insulating mat will be purchased in the future if needed. With purchases in progress, the team is projected to come in under budget for the final design.



12/06/2021 - Expenses Table

Caroline Craig - Dec 11, 2021, 9:44 PM CST

Title: Expenses Table

Date: 10/18/2021

Content by: Team

Present: Team

Goals: To document and update the expenses table with purchases throughout the fabrication process.

Content:

Item	Description	Manufacturer	Part Number	Date	QTY	Cost Each	Total	Link
Category 1 : Incubator								
3D Printed Casing	for sides of incubator	Makerspace		11/9/2021	1	\$32.32	\$32.32	N/A
Transparent Cover Plates	top and bottom of incubator	Radnor	64005034	10/29/2021	2	\$1.04	\$2.08	https://www.alphas.com/product
Category 2 : Components								
3/8 and 1/4 in. Polyethylene Tubing	heated water will flow through	USA Sealing	55YU99	11/23/2021	1	\$1.96	\$1.96	LINK
Epoxy glue	to attach loose components	Makerspace				\$1.50	\$0.00	N/A
1.5mm Tube Connector	connection between CO2 tank and incubator	Fisher Scientific	35031	10/29/2021	1	\$14.96	\$14.96	LINK
Vinyl Tubing 3/8" x 1/2"	heated water will flow through	Ace Hardware	4027504	12/6/2021	1	\$8.33	\$8.33	N/A
Barbed Vacuum Connector	connection between tubing	Grainger	52MH6	11/23/2021	2 (of 10)	\$0.95	\$1.90	LINK
TOTAL:							\$61.55	

Conclusions/action items:

The items documented in the expenses table are the items that were purchased for our microscope cell culture incubator. All costs were covered by the client. Other components are being reused from the previous team's projects, so the cost of those materials is not included in the expenses table. If the project were to be reproduced from scratch the total cost would be roughly \$150. Altogether the team came in under budget for the final design.



11/29/2021 Box Fabrication: 3D Print

SAMUEL BARDWELL - Dec 05, 2021, 5:16 PM CST

Title: Box Fabrication: 3D Print

Date: 11/29/21

Content by: Sam

Goals: To 3D print the incubator box and assemble it.

Content:

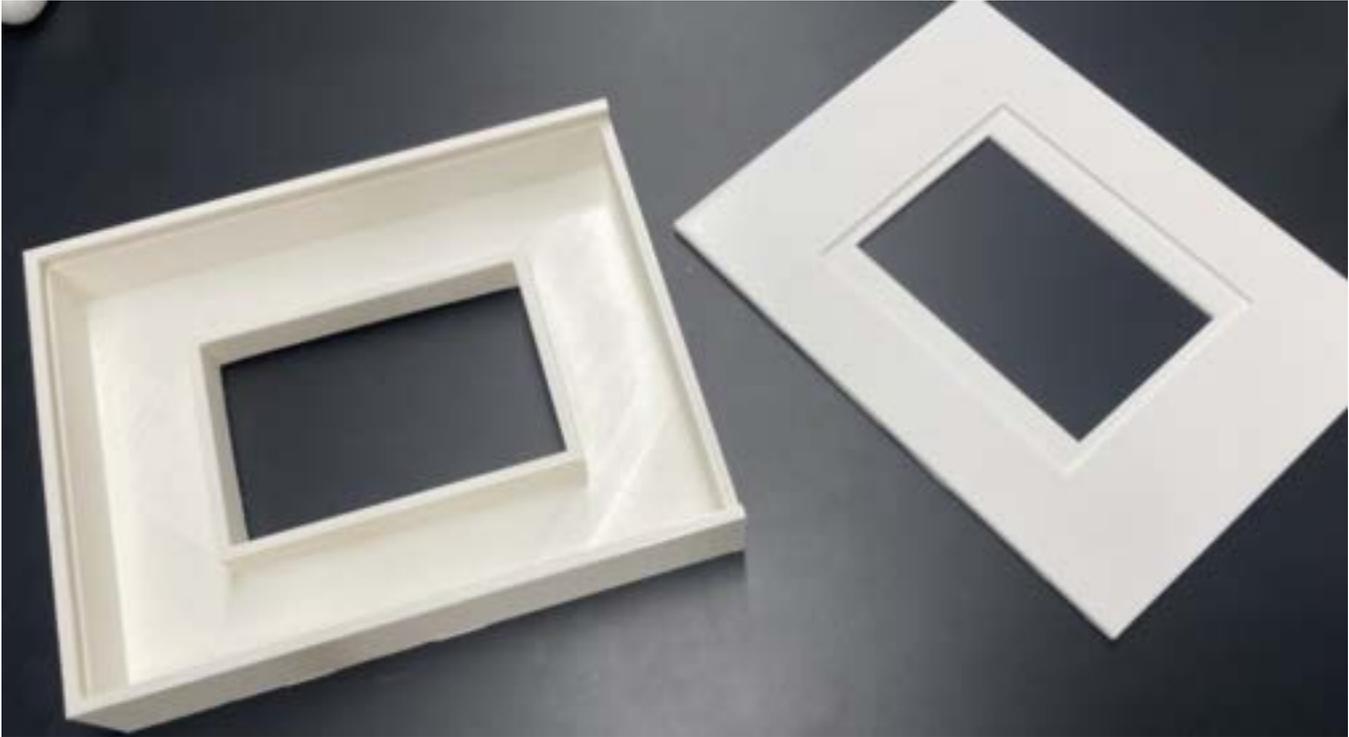


Figure 1: Top view of incubator box and crown 3D prints

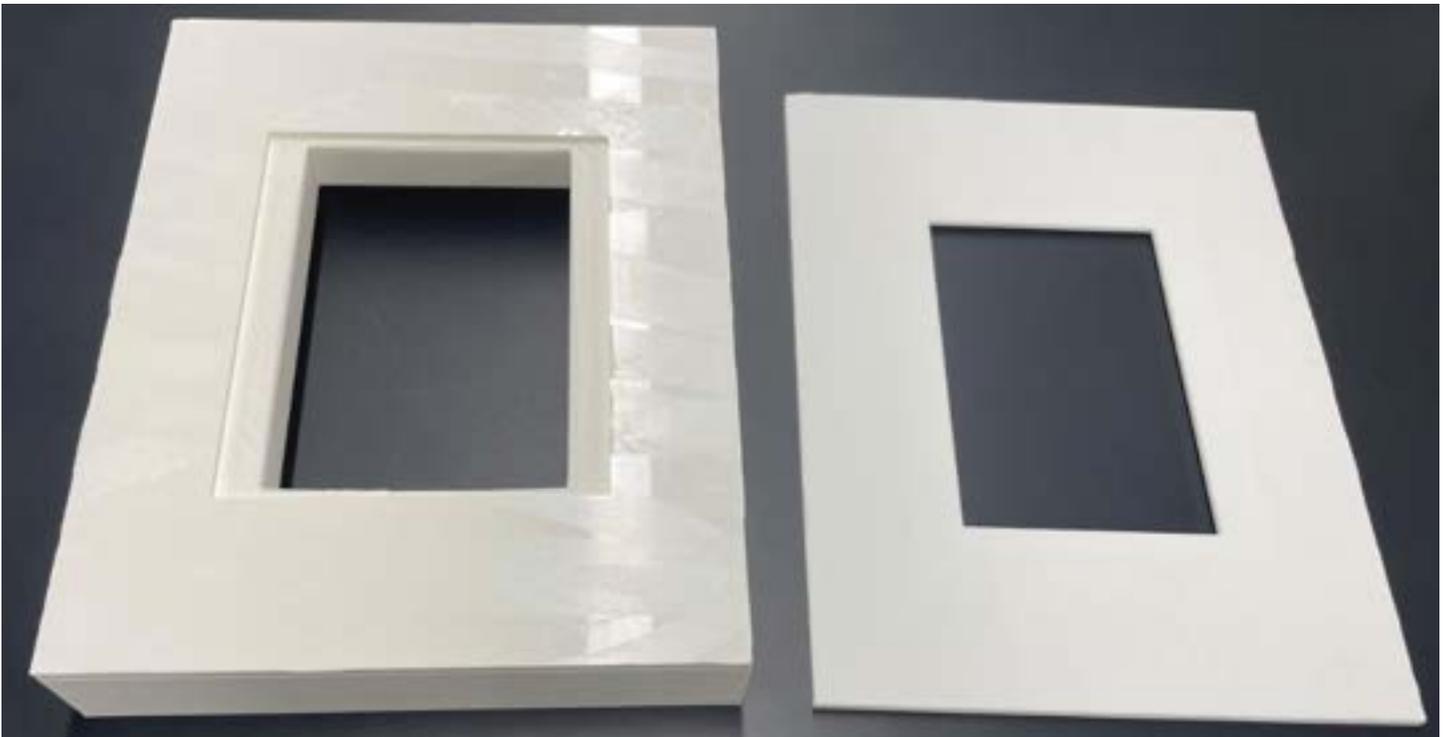


Figure 2: Bottom view of incubator box and crown 3D prints



Figure 3: Assembled 3D printed incubator box.

Conclusions/action items:

The printed box turned out nicely. There are a couple straggling PLA plastic strings from the 3D printer. Sliding in the crown of the box to the slit printed into the box is a little difficult and not smooth, but it does go all the way in. Next steps are to epoxy the glass to the plastic squares as well as drill holes into the plastic and epoxy adaptors and tubing to the box as well.



11/29/2021 Hardware Setups


SAMUEL BARDWELL - Dec 09, 2021, 1:26 PM CST

Title: Hardware Setups

Date: 11/29/21

Goals: To show photos of the electrical set up for the sensors in the incubator.

Content:

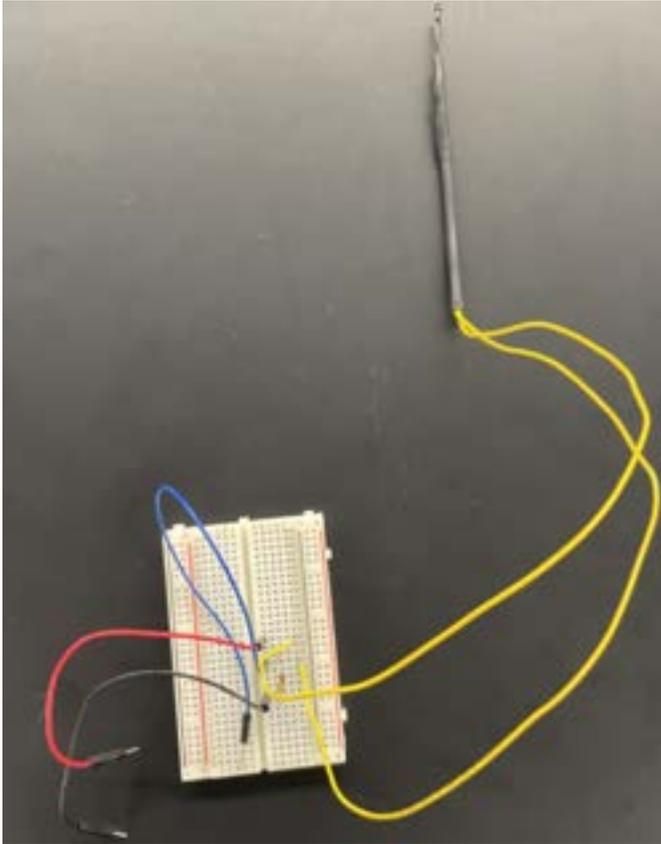

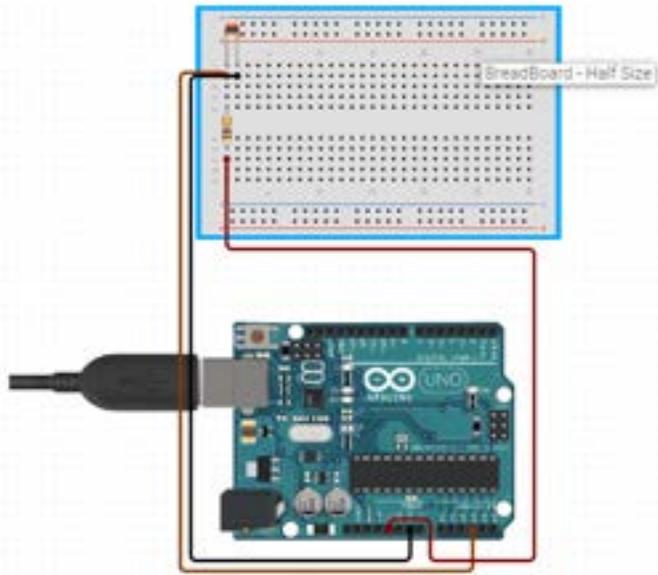


Figure 1: Thermistor hardware set up.

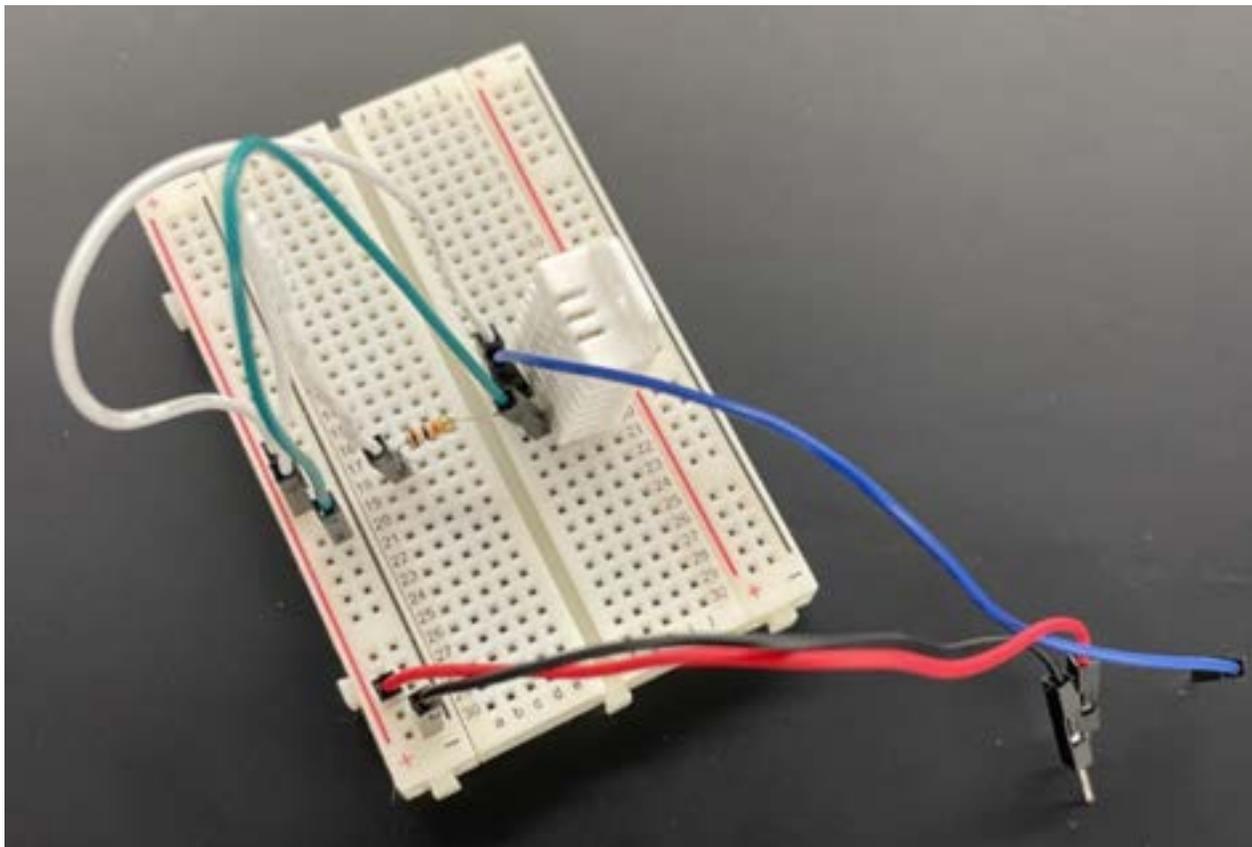


Figure 2: DHT22 sensor hardware set up



12/07/2021 Incubator Fabrication

Katie Day - Dec 07, 2021, 8:04 PM CST

Title: Incubator Fabrication

Date: 12/07/2021

Content by: Katie McGovern

Present: Katie McGovern and Sam Bardwell

Goals: To fabricate the incubator.

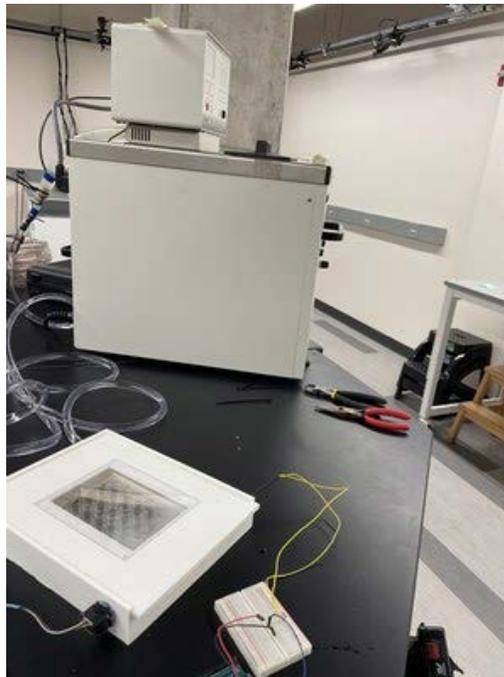
Content:

The box was fabricated by first drilling 3/8 inch diameter holes in the front of the box and then using a circular file to expand them so that the barbed connectors could fit in the incubator. They were then hot glued. The glass was hot glued onto the small divot made for them in the design. A 1/4 inch hole was drilled on the bottom right corner for the thermistor and filed with a circular file. A 1/2 inch hole was drilled and expanded via circular file for the CO2 sensor to fit in. The CO2 sensor and the thermistor were hot glued into place. The 3/8x1/4 inch tubing was wrapped in a circular fashion along the interior of the box and connected to the barbed vacuum connectors. They were then secured by zip ties. They were connected to a 1/2x3/8 inch tubing that was secured via zip ties to both the connector and the hot water pump. Then roughly 16 oz of water was poured into the incubator.

Conclusions/action items:

The PLA material needs to be changed as it was difficult to drill into, very brittle, and appeared to be leaking in random places.


Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5896.jpg (780 kB)

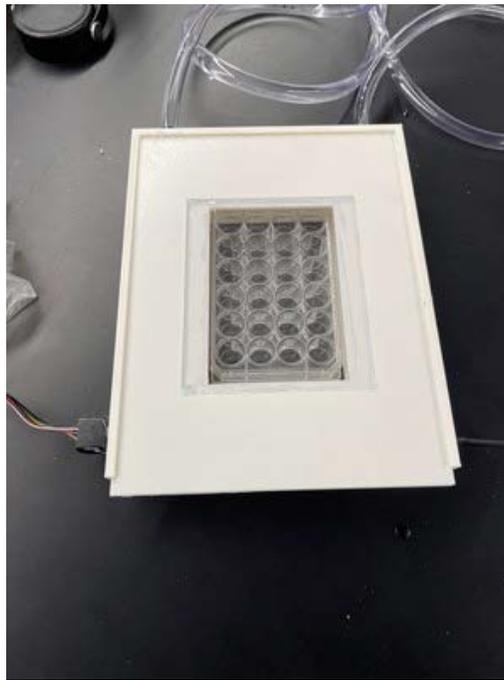Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5894.jpg (1.19 MB)

Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5893.jpg (1.19 MB)


Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5892.jpg (597 kB)

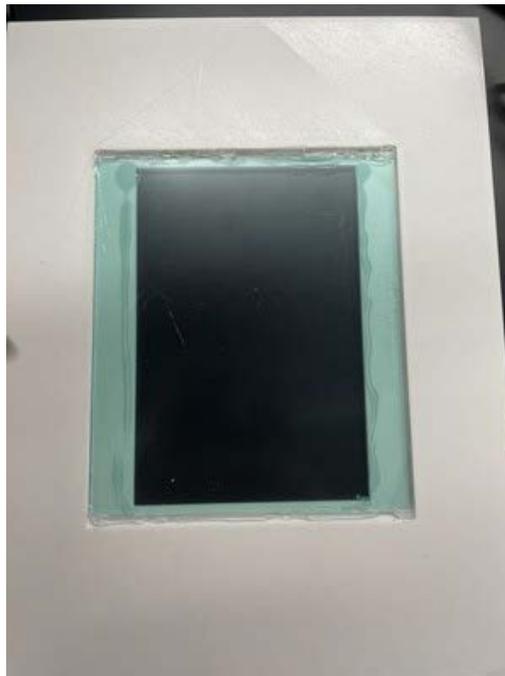Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5891.jpg (875 kB)

Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5890.jpg (404 kB)

Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5889.jpg (1.27 MB)


Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5888.jpg (780 kB)

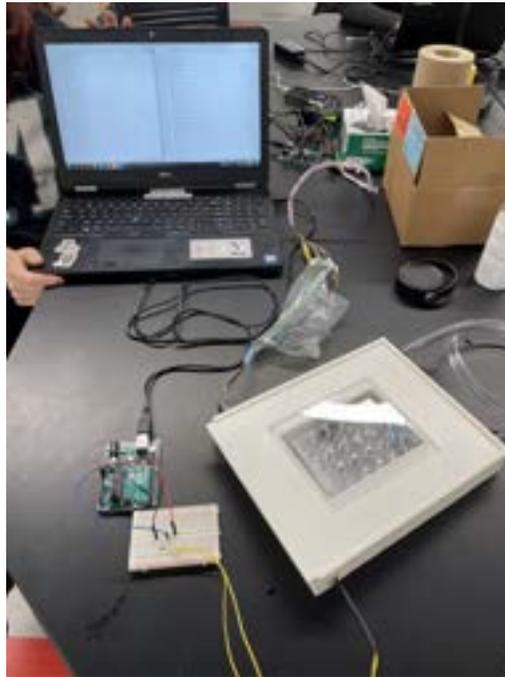Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5895.jpg (693 kB)



11/01/2021 Testing Protocols Initial Draft

MAYA TANNA - Nov 05, 2021, 2:51 PM CDT

Title: Testing Protocols Initial Draft

Date: 11/01/2021

Content by: Caroline and Maya

Present: Team

Goals: To document the initial draft of test protocols that were sent to Dr. Kinney for review/approval

Content:

See attachment below.

Conclusions/action items: Use feedback from Dr. Kinney to improve test protocols as well as feedback from Show and Tell to add components to test to ensure the most successful final design.

MAYA TANNA - Nov 05, 2021, 2:51 PM CDT

Abstract Experiment - Temperature and Humidity Sensor Test Protocol

Introduction:
 Name of Topic:
 Goals of Test Performance:
 Title of Test Performance:

Objectives:
 The team will be analyzing a sensor inside the incubator in order to measure the environmental conditions. The measurements of the humidity and temperature will be observed by an Arduino Uno 3.3V board connected to the sensor. The team will first be testing the sensor and then calibrating it to ensure it is accurate. After the sensor is calibrated, the team will then test for measuring the temperature and humidity of the sensor in order to ensure it is accurate. The team will then be testing the sensor in order to ensure it is accurate. The team will then be testing the sensor in order to ensure it is accurate.

Step	Procedure	Observation/Validation	Pass/Fail	Notes of Tester
1	Set up the incubator for testing with the Arduino Uno 3.3V board.	• Verified Connections		
2	Set up the Arduino Uno 3.3V board to read the sensor data.	• Verified Connections		
3	Record the average temperature of the system for the duration of the test. The team will record the temperature every 10 minutes for a period of 30 minutes. The team will then be testing the sensor in order to ensure it is accurate. The team will then be testing the sensor in order to ensure it is accurate.	• Verified Connections		
4	Record the average temperature of	• Verified		

[Download](#)

Testing_Protocols_1_.docx (597 kB)



11/15/2021 Incubator User Manual

Katie Day - Dec 07, 2021, 8:08 PM CST

Title: Incubator User Manual

Date: 11/15/2021

Content by: Sam Bardwell and Ethan Hannon

Present:

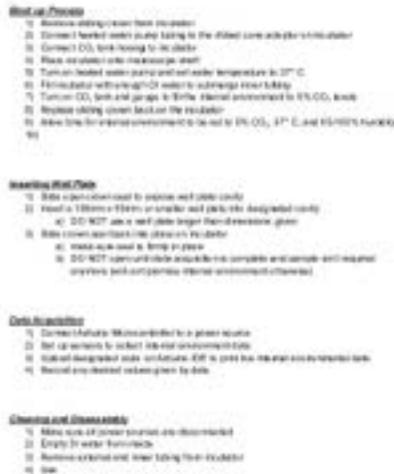
Goals: To establish a user manual to determine how to use the incubator once printed.

Content:

See attached user manual.

Conclusions/action items:

Katie Day - Dec 07, 2021, 8:09 PM CST



[Download](#)

Incubator_User_Directions.pdf (47.4 kB)



11/19/2021 Testing Protocols Final Version

MAYA TANNA - Nov 25, 2021, 2:44 PM CST

Title: Testing Protocols Final Version

Date: 11/19/2021

Content by: Maya/Caroline

Goals: To document the final draft of the testing protocols, which were edited based on the team and advisor's feedback

Content:

See attachment below.

Conclusions/action items: Execute testing wherever possible and investigate CO2 component of the project.

MAYA TANNA - Nov 25, 2021, 2:45 PM CST

Internal Environment - Temperature and Humidity Sensor Test Protocol

Introduction:
 Name of Team:
 Course/Field Performance:
 Title of Test Performance:

Objectives:
 The team will be analyzing a sensor from the incubator in order to measure the internal environment. The measurement of the humidity and temperature will be compared to an additional CO2 sensor in a separate device. The team will also be using the data from the sensor and the Arduino are using circuits for calibrating the sensor and then comparing the data to the newly made and previous data points using a spreadsheet. To calibrate the sensor, the team will use a resistor and a 5V power source. Once the sensor is calibrated, the accuracy will be tested by comparing the temperature and humidity of the working environment in a room if they are both working as expected, and then comparing to temperature decrease captured by temperature and humidity sensors. Afterward, the team will measure the temperature inside the incubator with a thermometer and the sensor. To keep the incubator completely sealed, the thermometer and the sensor will be inserted into the incubator and through the glass. The data will be compared to the sensor value to verify if the incubator is airtight.

Step	Procedure	Verification/Validation	Pass/Fail	Initials of Tester
1	Calibrate the sensor using a resistor and a 5V power source.	• verified Continued		
2	Test the accuracy of the sensor by comparing the data to the newly made and previous data points using a spreadsheet. To calibrate the sensor, the team will use a resistor and a 5V power source. Once the sensor is calibrated, the accuracy will be tested by comparing the temperature and humidity of the working environment in a room if they are both working as expected, and then comparing to temperature decrease captured by temperature and humidity sensors. Afterward, the team will measure the temperature inside the incubator with a thermometer and the sensor. To keep the incubator completely sealed, the thermometer and the sensor will be inserted into the incubator and through the glass. The data will be compared to the sensor value to verify if the incubator is airtight.	• verified Continued		
3	Compare the data to the sensor value to verify if the incubator is airtight.	• verified Continued		

[Download](#)

Testing_Protocols_Template_1_.docx (599 kB)



12/03/2021 CO2

Katie Day - Dec 07, 2021, 8:05 PM CST

Title: CO2 Testing

Date: 12/3/2021

Content by: Katie, Olivia, Maya, and Caroline

Present: Katie and Olivia

Goals: To test the CO2 sensor to make sure that it is working properly.

Content:

Attached our the results of our testing, testing protocols written by Maya and Caroline, performed by Olivia and me.

Conclusions/action items:

The CO2 sensor is ready for incorporation into the incubator.

Katie Day - Dec 07, 2021, 8:05 PM CST



[Download](#)

concentration.csv (2.43 kB)

Katie Day - Dec 07, 2021, 8:05 PM CST



[Download](#)

concentration_graphs.csv (2.34 kB)



12/03/2021 Thermistor

Katie Day - Dec 07, 2021, 8:05 PM CST

Title: Thermistor Testing

Date: 12/3/2021

Content by: Katie, Olivia, Maya, and Caroline

Present: Katie and Olivia

Goals: To test the accuracy of our thermistor against an incubator.

Content:

Testing protocol written by Maya and Caroline and performed by Olivia and me. Results are below.

Conclusions/action items:

Thermistor is working properly and ready for implementation.

Katie Day - Dec 07, 2021, 8:05 PM CST



[Download](#)

Misty_In_Incubator_10-min.PNG (15.4 kB)



12/03/2021 Humidity

SAMUEL BARDWELL - Dec 11, 2021, 1:53 PM CST

Title: Humidity Testing

Date: 12/3/2021

Content by: Katie and Olivia

Present: Katie and Olivia

Goals: To test the accuracy of our humidity formula against the DHT22 sensor

Content:

Humidity data gathered over time in order to perform ttest to determine statistical significance compared to the DHT22 sensor.

	<i>Variable 1</i>	<i>Variable 2</i>
Mean	12.61830986	12.16718182
Variance	0.090374245	0.424219419
Observations	71	220
Hypothesized Mean Difference	0	
df	255	
t Stat	7.973463829	
P(T<=t) one-tail	2.59912E-14	
t Critical one-tail	1.650851092	
P(T<=t) two-tail	5.19824E-14	
t Critical two-tail	1.96931057	

Figure 1: T-test results comparing the thermistor humidity readings to the DHT22 readings.

Conclusions/action items:

Send data to caroline, olivia, and maya for analysis. The t-test was determined to be significant (significance value of .05). This is not what we expected because the average values are within .5% between the DHT22 and thermistor. We will most likely have to improve the calibration of the thermistor if we want to continue with this project.

Katie Day - Dec 07, 2021, 8:05 PM CST



[Download](#)

Misty_Humidity_Data.csv (1.55 kB)



12/05/2021 Optical Testing

Caroline Craig - Dec 11, 2021, 9:47 PM CST

Title: Optical Testing

Date: 12/05/2021

Content by: Caroline Craig and Maya Tanna

Present: Caroline Craig and Maya Tanna

Goals: To determine whether or not the glass being used interfered with the optics of the microscope.

Content:

ImageJ Results of the Optical Testing

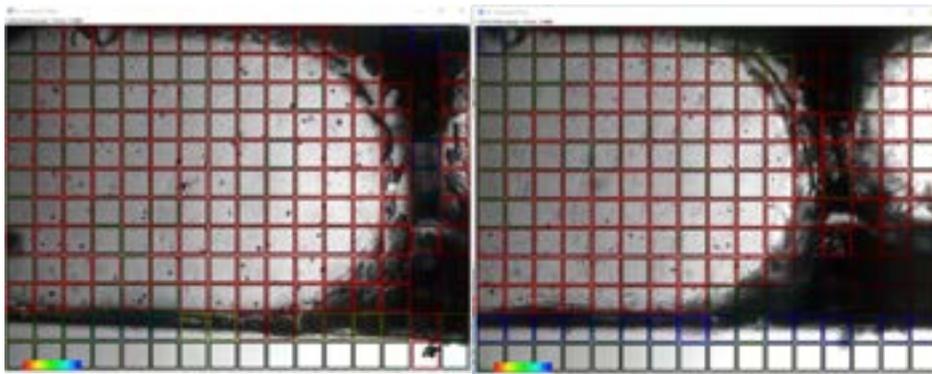


Figure 13: Optical analysis from ImageJ of microscopic cells with glass (left) and without glass (right)

Conclusions/action items:

The Optics were not interfered with.

MAYA TANNA - Dec 11, 2021, 8:25 PM CST

	Microscope Image with Glass	Microscope Image without Glass
Red Squares	130	120
Green Squares	54	51
Blue Squares	8	21
Total	192	192

MAYA TANNA - Dec 11, 2021, 8:26 PM CST

Results from this test show that the image with the glass had a slightly higher, yet very similar focus quality compared to the image without glass present.



12/07/2021 Attempted Incubator Testing

Katie Day - Dec 07, 2021, 8:04 PM CST

Title: Attempted Incubator Testing

Date: 12/07/2021

Content by: Katie McGovern and Sam Bardwell

Present: Katie McGovern and Sam Bardwell

Goals: To initially determine whether or not our incubator was working as expected.

Content: Data collected during testing.

Conclusions/action items:

1. Polyethelene tubing acted more as an insulator than a conductor and would not heat up the water bath to the desired temperature.
Need to use a metal tube.
2. PLA box was leaking slightly. It is unclear where or how it is leaking as it has been sealed via hot glue and zip ties.
3. Glass did fog up after about 30 minutes so we will need to figure out how to demist the glass.

Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

Incubator_Temp_Over_Time.csv (5.1 kB)

Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

Incubator_Temp_Over_Time.PNG (68.7 kB)

Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

Incubator_Temp_Hum_Over_Time.csv (5.1 kB)



[Download](#)

Actual_Inc_HUm_Data.csv (2.19 kB)



09/24/2021 Product Design Specifications

SAMUEL BARDWELL - Sep 21, 2021, 7:12 AM CDT

Title: Product Design Specifications

Date: 9/24/21

Content by: Everyone

Present: Everyone

Goals: To create a PDS in order to show our intended project in great detail.

Content:

PDF of PDS is attached

Conclusions/action items:

We will follow this PDS throughout the entire project to make sure we create a device that meets the clients needs.

SAMUEL BARDWELL - Sep 21, 2021, 7:13 AM CDT

Product Design Specifications



Microscope Cell Culture Incubator

HW 02 2021
24 September 2021

Class: Dr. John Pustowl
University of Wisconsin-Madison
Department of Mechanical Engineering

Team:
Katie McClellan
Sam Bardwell
Maggie Turner
Oliver Smith
Caden King
Ellen Hansen

[Download](#)

Product_Design_Specifications.pdf (219 kB)



09/27/2021 Design Matrix

MAYA TANNA - Oct 10, 2021, 9:11 AM CDT

Title: Design Matrix

Date: 09/27/21

Content by: Everyone

Present: Everyone

Goals: To create a design matrix to evaluate our potential solutions to the project.

Content:

See attachment below.

Conclusions/action items:

We will follow these design specifications to ensure we deliver the desired product to the client.

MAYA TANNA - Oct 10, 2021, 9:11 AM CDT

Rank	Criteria	Component 1		Component 2		Component 3	
		Score	Weighted	Score	Weighted	Score	Weighted
1	Storage Enclosure	25	12.5	10	5	5	12.5
2	Waterproof Enclosure	20	10	15	7.5	10	10
3	Standard Enclosure	15	7.5	20	10	15	7.5
4	Case	10	5	25	12.5	10	5
5	Light Sensor	5	2.5	30	15	10	5
	Total	55	27.5	70	35	55	27.5

[Download](#)

Design_Matrix_.xlsx (681 kB)



10/15/2021 Preliminary Presentation

MAYA TANNA - Oct 19, 2021, 4:32 PM CDT

Title: Preliminary Presentation

Date: 10/15/2021

Content by: Katie McGovern, Sam Bardwell, Maya Tanna, Olivia Jaekle, Caroline Craig, and Ethan Hannon

Present: Whole Team

Goals: To present our preliminary findings, goals, and proposed design to our client and advisor.

Content:

Attached is the preliminary presentation.

Conclusions/action items:

Begin ordering materials and prototyping.

Katie Day - Oct 18, 2021, 3:56 PM CDT



[Download](#)

Preliminary_Presentation_Slides_1_.pdf (971 kB)



10/19/2021 Preliminary Report

MAYA TANNA - Oct 19, 2021, 10:04 PM CDT

Title: Preliminary Report

Date: 10/15/2021

Content by: Katie McGovern, Sam Bardwell, Maya Tanna, Olivia Jaekle, Caroline Craig, and Ethan Hannon

Present: Whole Team

Goals: To document our final version of the preliminary report.

Content:

See attachment below.

Conclusions/action items:

Order materials and get feedback on final design/preliminary deliverables from advisor and client.

MAYA TANNA - Oct 19, 2021, 10:04 PM CDT

Microscopic Cell Culture Incubator
Preliminary Report



BME 390.00 Design
28 October 2021

Class: Dr. John Pustilli
University of Wisconsin-Madison
Department of Biomedical Engineering

Advisor: Dr. Melissa Kozay
University of Wisconsin-Madison
Department of Biomedical Engineering

Team:

Co-Leader: Max Tamm
Co-Leader: Sam Bardwell
Communicator: Katie McGovern
BIO: Olivia Jaekle
BME: Ethan Hannon
BIO: Caroline Craig

[Download](#)

Preliminary_Report- Microscopic_Cell_Incubator.pdf (1.51 MB)



12/10/2021 Final Poster Presentation

Katie Day - Dec 11, 2021, 4:32 PM CST

Title: Final Poster Presentation

Date: 12/10/2021

Content by: Katie Day, Sam Bardwell, Maya Tanna, Caroline Craig, Olivia Jaekle, and Ethan Hannon

Present: Katie Day, Sam Bardwell, Maya Tanna, Caroline Craig, Olivia Jaekle, and Ethan Hannon

Goals: To present the work we have done over the course of the semester in a clear and concise fashion.

Content:

See attachment.

Conclusions/action items:

N/A

Katie Day - Dec 11, 2021, 4:33 PM CST



[Download](#)

Final_Poster_-_Final_1_.pdf (2.45 MB)



09/30/2021 Progress Report 3

Katie Day - Dec 08, 2021, 9:22 PM CST

Title: Progress Report

Date: 9/30/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 08, 2021, 9:21 PM CST



[Download](#)

cell_incubator-progress_report-3.docx (11.9 kB)



10/07/2021 Progress Report 4

Katie Day - Dec 08, 2021, 9:22 PM CST

Title: Progress Report

Date: 10/07/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 08, 2021, 9:22 PM CST



[Download](#)

cell_incubator-progress_report-4.docx (11.3 kB)



10/21/2021 Progress Report 6

Katie Day - Dec 08, 2021, 9:22 PM CST

Title: Progress Report

Date: 10/21/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 08, 2021, 9:23 PM CST



[Download](#)

cell_incubator-progress_report-6.docx (11.6 kB)



10/28/2021 Progress Report 7

Katie Day - Dec 09, 2021, 10:52 AM CST

Title: Progress Report

Date: 10/28/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 09, 2021, 10:56 AM CST



[Download](#)

cell_incubator-progress_report-7.docx (11.9 kB)



11/04/2021 Progress Report 8

Katie Day - Dec 09, 2021, 10:52 AM CST

Title: Progress Report

Date: 11/04/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 09, 2021, 10:56 AM CST



[Download](#)

cell_incubator-progress_report-8.docx (12.1 kB)



11/11/2021 Progress Report 9

Katie Day - Dec 09, 2021, 10:53 AM CST

Title: Progress Report

Date: 11/11/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 09, 2021, 10:56 AM CST



[Download](#)

cell_incubator-progress_report-9.docx (12.5 kB)



12/02/2021 Progress Report 11

Katie Day - Dec 09, 2021, 10:55 AM CST

Title: Progress Report

Date: 12/02/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 09, 2021, 10:56 AM CST



[Download](#)

cell_incubator-progress_report-11.docx (12.4 kB)



12/09/2021 Progress Report 12

Katie Day - Dec 09, 2021, 10:55 AM CST

Title: Progress Report

Date: 12/02/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 09, 2021, 10:57 AM CST



[Download](#)

cell_incubator-progress_report-12.docx (12.6 kB)



02/02/2022 Client Meeting #1 Notes

MAYA TANNA - Feb 06, 2022, 9:45 AM CST

Title: Client Meeting #1 Notes

Date: 02/02/2022

Content by: Katie

Present: Katie, Sam, Bella, Drew

Goals: To document what was discussed at our initial meeting with Dr. Puccinelli and next steps from there

Content:

Initial Client Meeting 2/2/2022

<https://uwmadison.zoom.us/j/9406883128>

Questions for Puccinelli_

1. What did you like about last year?

- a. Overall the construction of the box(shout out Sam)
- b. Approach to heating
 - i. Need to make sure that we are able to calculate how long it is going to take to heat to 37°C
- c. Very sterile

2. Do you have any materials that you think would improve the box? Or Any ideas for which material should be used in the future to prevent leaking?

- a. Box is a *great size* ;)
- b. Acrylic on the laser cutter (black acrylic for insulation and fluorescent imaging)
 - i. Also sterile and doesn't leak
 - ii. Special super glue to prevent leaking (acrylic glue)

3. Do you have any suggestions for having better seals around the box?

- a. Special super glue for the acrylic for seamed and sturdy box
- b. Recommends we do it first in cardboard
- c. Polyethylene? Polyurethane spray *
- d. Sandwich of acrylic insulation
 - i. Don't want to take up too much space
 - ii. Or on the bottom (not where the plate is)

4. ~~Does the BME department have spare breadboards we could borrow, as last semester we were using my electronics kit from 201, but I need that for 310 this year.~~

I have my 310 kit if we want to use it (i already took the class)

Bella u lifesaver! Yes plz!!

I'll grab it when i go home this weekend

Perfect just text me and i'll show you our locker in ECB next week

- Email Dr. P for arduinos and breadboards

5. What is the budget for this semester?

- a. \$100

6. What was the issue with expenses, and how can that be improved upon? Is reimbursement possible?

- a. BUY DIRECTLY FROM THE MAKERSPACE
 - i. BME Design_ScopeIncubator

- ii. Can 3D print and buy acrylic
- b. Check with Puccinelli before we buy anything

7. Will we have access to a CO2 tank this semester?

- a. Give Puccinelli a weeks notice and then we have a pay per month rental
- b. Tank in the incubator room is 100% CO2 and the incubator controls how much goes in and out
 - i. \$6/month
- c. We can also order one that is only 5% CO2 so that the system can stay at 5% (more expensive)
 - i. \$6/month to rent
 - ii. \$50 to buy

Dr. P's Questions for Us

1. Water circulator → fairly expensive and is not counted in our budget, but outside the department it might be neat to have our own water circulator (bruh wat... hot plates???)
2. More challenges (nooooooooooooooooooooo) (can we not pls)
3. Open source thing
 - a. Have people assemble it themselves
 - b. Make it free (boo i want money)

Conclusions/action items: We got our list of questions that we made before the meeting answered and also noted some questions Dr. Puccinelli had for us going forward. Going forward, we will be sure to be in constant communication with him if we need any assistance with purchasing and suggestions about the technical components of the project. This was a good first meeting, because the new members of the team got introduced to our client and learned more about his expectations and hopes for the project.



02/04/2022 Advisor Meeting #1 Notes

MAYA TANNA - Feb 06, 2022, 9:39 AM CST

Title: Advisor Meeting #1 Notes

Date: 02/04/2022

Content by: Katie

Present: Whole Team

Goals: To document what was discussed at our meeting with Dr. Kinney at our weekly meeting on Friday and next steps from there

Content:

2/4/2022 Advisor Meeting #1 Notes

- Had our first client meeting
- Goals for the semester
 - Black acrylic for the box and laser cut it
 - CO2 monitoring
 - More insulation → homogeneity for the inside
 - Math for copper tubing
 - Get humidity formula correct
- Puccinelli's challenge for the semester: *create a heated water pump*
- How will we combat losing heat throughout the wall of the box?
 - Unsure if we lost heat throughout the box since the reservoir of water was not heated
 - Polyurethane foam to coat the creases to help waterproof and insulate
 - Maybe a tar as well?
 - AFTER CONDUCTION, focus on cheap, waterproof, insulator
- Maybe jacketing our box with an insulator?
- CO2 feedback system
 - Valve that opens and connects to the sensor
- Next steps:
 - Start updating the testing protocols to be more accurate
 - Improve on the statistical analysis
 - Get a physical box prototype going
 - Two types of lids (one for testing and one for final project)
 - Slide or tackle?
 - Streamline all the electronics
 - Work on CO2
 - Break up into groups
 - PDS due next Friday

Conclusions/action items:

After going over our goals for the semester and introducing Bella/Drew to the project, we discussed next steps moving forward since the PDS and intro work is mostly completed already. Our next steps consist of updating the testing protocols, improving on the statistical analysis, getting a physical box prototype going, working to combine electronic components, starting CO2 work, and dividing up the team to conquer all of these goals.



02/11/2022 Advisor Meeting #2 Notes

Katie Day - Feb 11, 2022, 1:00 PM CST

Title: Advisor Meeting #2 Notes

Date: 02/11/2022

Content by: Katie

Present: Whole Team

Goals: To document what was discussed at our meeting with Dr. Kinney at our weekly meeting on Friday and next steps from there.

Content:

See Attached File.

Conclusions/action items:

See highlighted portions of attached file.

Katie Day - Feb 11, 2022, 1:00 PM CST



[Download](#)

2_11_2022_Advisor_Meeting_Notes_2.pdf (61.6 kB)



04/08/2022 Advisor Meeting #3 Notes

Katie Day - Apr 10, 2022, 7:09 PM CDT

Title: Advisor Meeting #3 Notes

Date: 04/08/2022

Content by: Katie

Present: Whole Team

Goals: To discuss our progress in the project and asses what our next steps are for fabrication and testing.

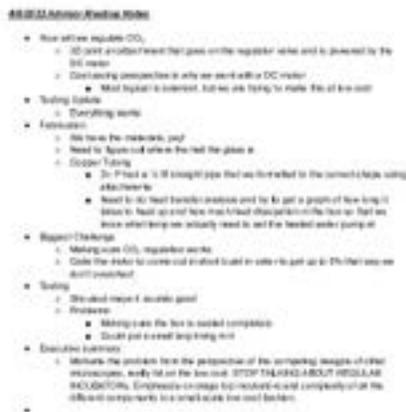
Content:

See Attached File.

Conclusions/action items:

See highlighted portions of attached file.

Katie Day - Apr 10, 2022, 7:09 PM CDT



[Download](#)

4_8_2022_Advisor_Meeting.pdf (45.7 kB)



04/15/2022 Advisor Meeting #4

Katie Day - Apr 17, 2022, 4:17 PM CDT

Title: Advisor Meeting #4 Notes

Date: 04/15/2022

Content by: Katie

Present: Whole Team

Goals: To discuss our progress in the project and asses what our next steps are for testing and the Final Deliverables

Content:

See Attached File.

Conclusions/action items:

See highlighted portions of attached file.

Katie Day - Apr 17, 2022, 4:17 PM CDT

04/15/2022 Advisor Meeting Notes

- Big takeaways from
 - Max filament
 - Printing good to go
 - Make for filament
 - 3D printed attachment
- Next week plan
 - Start work for testing
- Air suspension
 - Not in contact along gear
 - DC attachment might need some extra support
- Leakage
 - Look at work with glass with contact glass
- Any changes or questions in testing giving form it is all coming together?
 - May do separate boundary testing separately from CG and see where that fits DC motor work
 - CG may come later in the testing process before we do whole test testing
 - If we do necessary testing here we could do all testing at once
 - Why for all this in temperature and humidity testing this summer
 - Try to do all testing as separately as possible
- Are we planning on doing any cell testing testing?
 - Do that for the world on cells some cells
 - Dependent on CG, testing
 - What level of testing would we consider on line cells?
 - Work would be making testing on cells
 - While some are from a control - one plate of cells should be in the lab
 - CG is able to measure the the stability of the cells
- Could do gel testing on a motor
 - Progress of CG is to follow the pH of the motor
 - While are the last plate motor that into range in that condition
 - Look at a plate of motor in a regular condition compared to an condition and test that
 - Next steps
- Are there any new tests?
 - For the CG attachment in direction of they work
- Timeline
 - On track - ready start testing next week

[Download](#)

4_15_2022_Advisor_Meeting_Notes.pdf (82.2 kB)



09/17/2021 Client Meeting #1 Introductions to Client/Project Details

MAYA TANNA - Sep 18, 2021, 1:00 PM CDT

Title: Client Meeting #1 Introductions to Client/Project Details

Date: 09/17/2021

Content by: Maya Tanna

Present: Sam Bardwell, Katie Mcgovern, Maya Tanna, Caroline Craig, Olivia Jaekle, Ethan Hannon

Goals: To document the discussion with our client, Dr. Puccinelli, as well as the answers to our list of questions prepared for the meeting

Content:

Questions for Dr. Puccinelli

Overview of the Project:

Experimental Teaching Lab → Tissue engineering lab needs culture cells for the long term (*what is long term?*) that doesn't have a lot of money. Looking for a smaller, less expensive, and less bulky incubator that doesn't encompass the whole microscope or can be removed. Stage-top cell culture incubator. Grow cells and watch them over the course of time. Have to be able to stay alive with cell culture conditions for at least a week.

1. What is the budget for this project? **\$100**
 - a. Will this project be paid for using UW Funds? **Departmental teaching funds**
2. What is the device being used for, industry, research, etc?
 - a. **Used for teaching purposes, but if we get it right we can market this to other researchers**
3. What is our margin of error in regards to temperature, CO₂ levels, and humidity?
 - a. **37°C → look at industry standard for temp ranges**
 - b. **5% CO₂ → helps with buffering from sodium bicarbonate**
4. Is there a size constraint for the incubation chamber?
 - a. **Has to sit on microscope stage and hold a well plate that also doesn't interfere with the optics (ideal if both sides are transparent, but bottom must be transparent)**
 - b. **Needs to work with inverted microscope**
5. What are your preferred dimensions for the incubation chamber?
 - a. **Sits on microscope stage and holds well plate**
6. When you imagine the finished product, what color would you want it to be?
 - a. **No preference in color**
 - b. **Well plates are clear, black (stops contamination), and white (increases light).**
 - c. **Something that blocks out external light would be ideal, but is not required**
7. Could we test our design with live cells?
 - a. **Yes, Dr. P will give us some when/if we are ready**
 - b. **Use cells that are hard to kill → that's good for us**
 - c. **TELL HIM IF WE WANT THEM AFTER THANKSGIVING**
8. What are the most important design requirements/specifications (apart from the temperature, CO₂, and humidity level measurements provided)?
 - a. **Optical transparency, microscope stage (google that)**
9. How many devices should be created?
 - a. **Just one :)**
10. Are there any materials that you prefer we use?
 - a. **Nope :)**
11. How long will this device be used in the lab?
 - a. **Could be used up to two weeks, but shoot towards one week at a time.**
12. How often do you plan on using this device daily?
 - a. **Device would be used for one week at a time during tissue lab**

13. What is the shelf life of this product?

a. Long time → 10 years

14. What has been working well for previous projects? What hasn't?

a. Seal insulated box completely?

b. Sterilization is very important → autoclaving ideal but UV works too

15. Anything particular you would like us to continue with from past projects?

a. Temperature gradients are a large problem for cell cultures (reason for bulky products) look towards first project insulated box

16. What types of cell culture plates do you use?

a. What are their dimensions?

i. 6 Well plate, 24 well plate, 96 well plate → omnitrays?

ii. Standard petri dish

iii. Flasks → T25/T75 not really used but her

b. What type of medium do you use?

i. MEM

ii. 10% SPS and antibiotics

17. Will any other microscopes be used with this incubation chamber? Or, should it only be compatible with the inverted microscope?

Mainly inverted microscope

18. Should this device be ergonomic(able to move it on your own)?

a. Be able to carry it around and store it

b. Wires should not be hanging out freely

c. Easy to pick up and put away

Notes:

- CO2 humidifiers and such are done using wires and a breadboard
- No team has successfully created an incubator.
- Something that can be easily taken apart would be ideal
- Temp gradients with small amounts of liquid can be evaporated very quickly so humidity is a big issue

Research To Do for Week 9/17-9/24

- Materials
 - What can hold heat?
 - What is transparent?
- Industry Standards
 - What are the industry standards for margin of errors for temp, CO2, and humidity
 - What is the size of well plates and inverted microscope stages?
- Cells
 - Look up the biology and physiology of MEM
 - When does it evaporate?
 - What temps do we need to stay under?
 - What humidity is best for it?
- Temperature
 - How can we create a better temperature gradient?
 - How can we insulate in a small space?
 - Look towards less industry and more experimental research as to how we can heat things in a small space
- Sterilization
 - Autoclave
 - UV Sterilization
- Past Projects
 - Check out the older projects to see what other teams did

Conclusions/action items: Tailor research to these specifications and use this information to create the product design specifications document. Look into previous projects and determine what worked well and what led to less successful results.



09/28/2021 Client Meeting #2 Collecting Dimensions and Clarifying Project Details

SAMUEL BARDWELL - Sep 29, 2021, 11:27 AM CDT

Title: Client Meeting #2

Date: 9/28/21

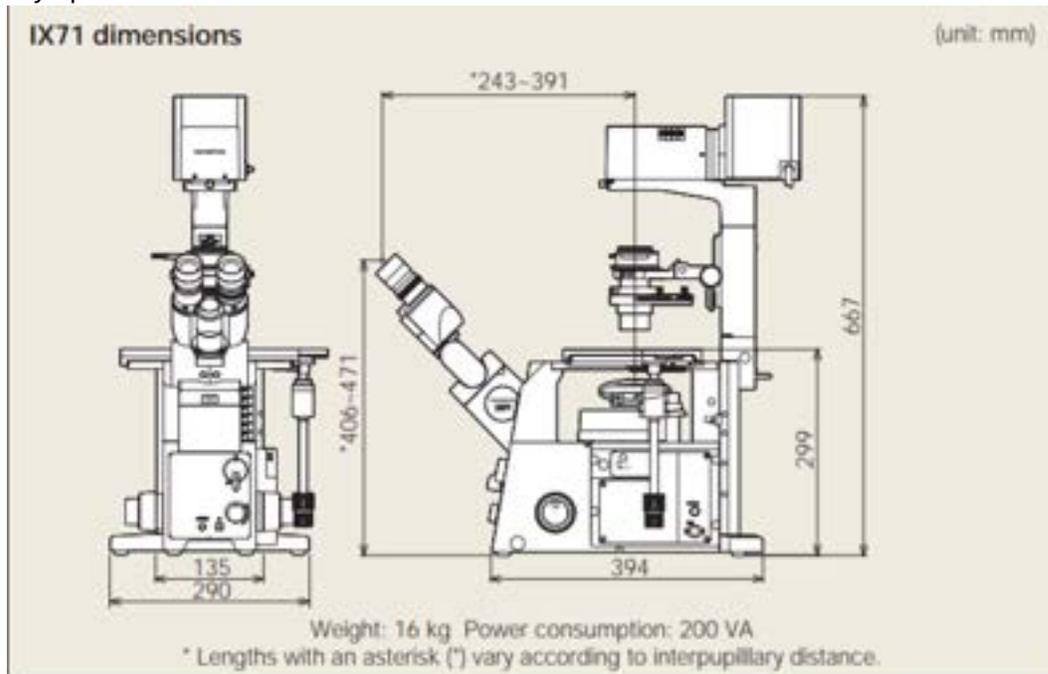
Present: Sam, Caroline, Ethan, Katie

Goals: To get a more in depth understanding of the project, tighten up loose ends, and get dimensions of the inverted microscope.

Content:

1. What is the exact model of inverted microscope for use? (for accurate dimensions)

1. Olympus IX71



2. Nikon Eclipse Ti- S

1. Don't want to change the distance sample is from the lens (32.40mm) **thickness**

2. **310 x 300 mm**

2. Could we use a laboratory CO2 gas line? Or, will an external CO2 gas supply be necessary to include in materials?

1. Tank with a regulator, hose into incubator

2. Don't need to purchase, readily available with hoses

1. What is the diameter of the hose? **7.16mm wide**

3. How many cell plates do you need in the incubator?

1. One - *Prefers just one well plate per incubator*

4. Would it be possible for us to test transparent materials with the microscope?

1. Optically clear enough?

2. Refraction of light?

3. Bottom of glass on multiwell plates.. Look into

4. YES ALL POSSIBLE

5. What is the use of the incubator during the week of class time?

1. AN ENTIRE WEEK

6. Do you have any specifications in the margins from industry standard? Or, is the tolerance cells can handle acceptable?

1. pH levels → CO2 levels, what is tolerance for a buffer?

7. What are the dimensions of the well plates? (Can look up online)

1. length = 127.44 mm

2. Width = 84.91mm

3. Height = 21.60mm

8. What would be the ideal recovery time for internal conditions after opening the cell culture incubator "door"? (Flow rates)

1. Five minutes after 30 second opening

9. Would you prefer manual CO2 addition, or an automatic regulation with sensors?

1. Incubator itself has a valve and a sensor → *automatic preferred*

10. Is the budget for the final design, or does it include materials for preliminary designs?

1. Yes but if the prototype works well then it can be flexible

Notes:

- Current incubator is water jacketed with co2 tank at ~10psi
- Microscope is able to lift head up so that we can fit the incubator in
-

Conclusions/action items:

We learned more about the intentions for the project and have a clear understanding of the route we will have to take. The design matrix will be updated with the new information after this meeting. More detailed Solidworks drawings can be made with the new dimensions of the project. A lot of the sensors and parts of the project that we were planning to buy are accessible from past projects and in the BME teaching lab.



11/02/2021 Client Meeting #3 Fabrication Updates

ETHAN HANNON (ehannon@wisc.edu) - Nov 03, 2021, 9:42 PM CDT

Title: Client Meeting #3

Date: 11/2/21

Content by: Sam & Ethan

Present: Sam & Ethan

Goals: To update the client on our position with the project and to receive more feedback on our incubator design.

Content:

- Thermistor to record temperature if the DH22 sensor does not work. Doesn't record humidity. Need a calibration curve
- The lens height is adjustable. He will get back to us with a height at the best refractive value. This will help solidify the dimensions of the incubator box so it can be 3D printed.
- We have the glass plates but they are very small. Will have to update box drawings to account of this change. Intended plan is to have a covering and the set the glass plate on top of the covering to allow transparency.
- Can use any tubing found in the old ECB lab room. Preferably 1/4 to 3/8 inch tubing. 1/4 inch tubing would work best with push adaptors (need to find a way to connect it to heated water incubator). 3/8 may work better for connection to heated water pump.
- He will set aside some cells for us to use to test with in the future.
- He already ordered a new DH22 temperature and humidity sensor to see if the old one was truly faulty.
- Lots of different adaptors to look at. Hose adaptors, push connectors and the gray connector for the heated water bath.



Figure 1: Different views of gray heated water pump adaptors.

Ethan found links online to order if need be:

For the coupling body: https://products.cpcworldwide.com/en_US/ProductsCat/NS4/NS4D17006

For the valve coupling insert: https://products.cpcworldwide.com/en_US/ProductsCat/HFC12/HFCD22612



Figure 2: Push adaptor for 1/4 inch tubing. Very easy to use.

- Avoid buying from ACE hardware because we can't get reimbursed. If anything needs to be ordered go to Puccinelli and he can have it within a couple of days.

Conclusions/action items:

SOLIDWORKS drawings will be updated to account for the glass dimensions. Testing on the glass can be conducted since some materials have arrived. Sensors will continue to be tested. May have to go a different temperature sensing route. Adaptors will be the main focus for the fabrication team and to figure out the best tubing to use to heat the inside of the cell culture incubator.



09/17/2021 Advisor Meeting #1

MAYA TANNA - Sep 25, 2021, 9:30 AM CDT

Title: Advisor Meeting #1

Date: 09/17/2021

Content by: Maya Tanna

Present: Sam Bardwell, Katie MCGovern, Maya Tanna, Caroline Craig, Olivia Jaekle, Ethan Hannon

Goals: To document what was discussed at our first advisor meeting with Dr. Melissa Kinney

Content:

Advisor Meeting Notes 9/17/2021

- Prof. Kinney has a lot of experience using cell incubators
- Logistics
 - Find out where we will go for the 2 hours for presentations, show and tell, and final
 - Friday Meetings: 30 minute meetings to productively ask questions, connect to resources, brainstorm ideas. Send questions to everyone in advance for Friday meetings so that we can come to the meeting prepared for the questions we need to tackle. Weekly Recap, Goals, Discussion, and Problems we are running into.
 - Weekly Reports: send to both Prof. Kinney and Dr. P
 - Address the email to Dr. P
- Advice
 - Communication: keep communications open at all times
 - Delegation
 - Fast Paced Class = TIME MANAGEMENT
 - Set concrete goals and intermediate deadlines
 - Make sure that your goals have an actionable concrete outcome and a deadline for that outcome
 - *Targeted Research and SMART Goals*
 - Be as specific as possible with your PDS
 - Quantitative more than qualitative
- Grading
 - Using Canvas More
 - Final Deliverables - weighted most heavily
 - Preliminary Report is graded as if it was a final report (5% of grade)
 - Entire team gets roughly the same grade
 - Individual grades
 - Peer evaluations
 - Lab notebooks
 - Course deliverables
 - **Notebooks** (preliminary 5% and final 25%)
 - **Oral presentation** (preliminary 5% and final 20%)
 - **Written documentation** (preliminary 5% and final 25%)
 - Project output and team function
 - **Prototype** construction and evaluation (client satisfaction 5%)
 - **Participation** (contributions to weekly advisor meetings, group meetings, and team objectives, peer/self assessment 10%)
 - Technical leadership and outreach (for 402)

Conclusions/action items: Make sure to keep consistent communication with Dr. Kinney. It would also be helpful to send out weekly meeting agendas for meetings with her so that everyone on the team is on the same page and questions/clarifications can be dealt with effectively.



09/24/2021 Advisor Meeting #2

MAYA TANNA - Sep 25, 2021, 9:31 AM CDT

Title: Advisor Meeting #2

Date: 09/24/2021

Content by: Katie McGovern

Present: Sam Bardwell, Caroline Craig, Dr. Kinney, Maya Tanna, and Ethan Hannon

Goals: To recap our team accomplishments this week and discuss PDS and design matrix.

Content:

9/24/2021 Advisor Meeting Notes

- Refractive index in glass optical properties
- Look into the glass that they use on the bottom of multi-use well plate
- Maybe 3D print the sides and have optically transparent tops
- Ask about Routine Use
 - Are we using it for multiple labs for 3 hours only?
 - Are we using it for multiple days in the same lab?
- Loosen our variation parameters
 - What level of tolerance will we allow to meet Dr. P's specifications rather than industry standards?
- Size Requirements
 - Meet on Tuesday with Dr. P to get size requirements
 - More specific size of microscope and well plates as they are all the same size it just depends on the amount of wells
- Opening and closing the microscope
 - How to keep the gas in when the microscope slides are switched?
 - Sealed?
 - How long will it take to get back to necessary parameters?
 - Flow rate and time to get to stabilization → may need to do during testing
- CO₂
 - Comes in a tank with a regulatory on it, there is a hose on the side that you plug into the incubator; usually with a feedback loop on them
 - Tanks already have regulators on them :)
- How will we tackle all different pieces
 - Main goal: how to keep temp even
 - Water Jacketed or Direct Heat
- Stage-top Incubators

- 2 competing designs that have stage-top incubators
 - wet sponge in incubator and whole incubator is placed into conditions for temperature so temp regulated within environment
 - Use outside humidifier to control the inside
- What is the range of pH that we need to keep and will this affect if we heat the incubator manually vs mechanically?
- Design Matrix
 - Figure out where the key parts are and put the weights in
 - Better figure out brainstorming to multi-aspect designs

Conclusions/action items:

- Questions for Puccinelli
 - Ask about Routine Use
 - Are we using it for multiple labs for 3 hours only?
 - Are we using it for multiple days in the same lab?
 - How will flow rates come into play with a very small box? Is there a required flow rate? Should we include a specification for this?
 - Meet on Tuesday with Dr. P to get size requirements
 - Look into materials and equipment already in tissue culture lab



10/01/2021 Advisor Meeting #3

MAYA TANNA - Oct 10, 2021, 8:35 AM CDT

Title: Advisor Meeting #3

Date: 10/01/2021

Content by: Maya Tanna

Present: Maya Tanna, Sam Bardwell, Katie Mcgovern, Caroline Craig, Olivia Jaekle, Ethan Hannon

Goals: To document notes and conversation from our third advisor meeting with Dr. Kinney

Content:

10/1/2021 Advisor Meeting #3

- Recap of weekly events
- Get preliminary report written well!!
 - Prelim report is very similar to final with the exception of testing and results
- Design Matrix
 - Previous Project Extension
 - Heater Pumped Incubator
 - Dr. Kinney likes that idea
 - Water level will be very small to minimize risk of leakage
 - Assuming that with materials we can seal the box
 - Load the plate in from the top
 - Either slot, snap, or hinge
 - **Can we do the math to determine how much volume of water needs to be heated to get to 37°C. Depends as well on the tubing.**
 - **How long does it take to get to that equilibrium?**
 - *Maybe leave a port or a sensor so that we can measure temp*
 - *Easy to design ports with 3D printed material*
 - Shelving Design
 - Do we brainstorm more based on priority now that we have met with the client?
- Autoclaving will affect material choice
 - **How hot does an autoclave get?**
 - **What is the pressure of an autoclave?**
 - **Autoclaving doesn't always keep material properties?**
 - **We can test this in the lab**
- How will we seal it?
 - Glass on the bottom will be very secure → glue like
 - Glass on the top → **need to discuss how the top will fit together (sliding versus hinge)**
 - **Maybe using a rubber casket, like a water bottle cap.**
 - **Lip in top of box with a cap?**
- We can access sensors from old bme labs
 - Still double check that we could build it with cheapo sensors
 - Most incubators do not tell humidity levels → people just put water in and assume that it will be enough
 - Will we get condensation on the inside of the box?

- NO! → only time they get condensation is when the pan goes dry so as long as there is an equilibrium we should not be getting active condensation

Conclusions/action items: Use this feedback when writing the preliminary presentation and report. Start determining materials and think about how all the design components will come together.



10/08/2021 Advisor Meeting #4

MAYA TANNA - Oct 22, 2021, 12:22 PM CDT

Title: Advisor Meeting #4

Date: 10/08/2021

Content by: Maya Tanna

Present: Maya Tanna, Sam Bardwell, Katie Mcgovern, Caroline Craig, Olivia Jaekle, Ethan Hannon

Goals: To document notes and conversation from our fourth advisor meeting with Dr. Kinney

Content:

10/8/2021 Advisor Meeting Notes

- Comments on general update
 - 3D printing - incubator box will be printed
 - Order quickly because shipping is taking a long time
- Design Matrix
 - Next step is figuring out how to put sensors inside th incubator
- Observed Geometry of the box
 - Make sure we include in our presentation of how we will put this together
- Sensors
 - Temp definitely maybe even a CO₂, but less important
 - Temp gage is an output sensor → sensor inside incubator that figures out CO₂, percentage and opens the solenoid when CO₂ levels drop or increase too rapidly
 - Automatic not manual
- Multiple aspects of the project
 - Building the box
 - Figuring out the sensor/
 - nternal environment maintenance
- Q&A
 - Any recommendations to get started on?
 - TESTING PLAN
 - Try to break up the project so that we are never waiting on someone else
 - Send us the preliminary presentation on TUESDAY

Conclusions/action items: Use this feedback when writing the preliminary presentation and report. Start determining materials and think about how all the design components will come together. Also, divide up into subcommittees: 1 for fabrication, 1 for sensor coding, and 1 for ordering materials/writing test protocols.



10/22/2021 Advisor Meeting #5

MAYA TANNA - Oct 22, 2021, 12:22 PM CDT

Title: Advisor Meeting #5

Date: 10/22/2021

Content by: Katie Mcgovern

Present: Maya Tanna, Sam Bardwell, Katie Mcgovern, Caroline Craig, Olivia Jaekle, Ethan Hannon

Goals: To document notes and conversation from our fifth advisor meeting with Dr. Kinney

Content:

10/22/2021 Advisor Meeting #5

- Impressions on the Prelim Presentations
 - Talk more about Client maybe → needs of client
 - Bit on on how we picked design criteria
 - Stood out in quantitative data
- Poster Presentation at the end of the semester
 - Still debating whether this will be in person poster or a presentation type thing
- Where we are at in the design process
 - Finalized prelim deliverables
 - Finished the materials purchase request
 - This weekend: Sam and Maya are checking out adaptors for tubing and such
 - Dr. Kinney recommends Ace Hardware in Hildale
 - Split teams up
 - Arduino
 - Materials and Testing protocols
 - Fabrication
- Materials Purchasing List
 - Asked Dr. P if he has any prior materials
 - Follow up email
 - Try to move forward with confidence otherwise
 - There is a way to reimburse if we do choose something
- Next week we will discuss the report
- **Show and Tell is in 2 weeks**

Conclusions: Reach out to Dr. Puccinelli again to move forward with material purchasing. Take pictures of parts from Ace Hardware, Menards, and Home Depot for more info on adaptors and tubing.



11/12/2021 Advisor Meeting #6

MAYA TANNA - Nov 12, 2021, 1:11 PM CST

Title: Advisor Meeting #6

Date: 11/12/2021

Content by: Katie Mcgovern

Present: Maya Tanna, Sam Bardwell, Katie Mcgovern, Caroline Craig, Olivia Jaekle, Ethan Hannon

Goals: To document notes and conversation from our sixth advisor meeting with Dr. Kinney

Content:

See attachment below.

Conclusions: Edit and execute test protocols. Create instructions for use document. Work on full system printing/assembly as well as ensuring that the code outputs correct values for CO2. Investigate CO2 sensors and go in depth with this component of the project.

MAYA TANNA - Nov 12, 2021, 1:11 PM CST

Advisor Meeting 11/12/2021

- Review progress
- The research plan is now finalized for the hardware
 - o Talk to the 4 other team members for the hardware
 - o The hardware is now done on the design stage
- Preliminary Testing
 - o One team member will run some tests
 - o Need to do calibrations or test the temperature stability and accuracy
- Design protocol
 - o How to check the the hardware without getting more data?
 - Use a digital multimeter on the glass (used for the temperature)
 - Look to find something like for a sensor
 - o Create a testing protocol for CO2
 - o Calibrate the percentage of the CO2 in two sessions - very difficult as its phase based
 - o Automatic control flow by using the calibration
 - Look at the engineer
 - Program to take
 - Design protocol
 - Look at a code that will require some the control needs value probably to create it
 - Value - find one from the CO2 calibration program
 - o Read the CO2 and make to open and close the valve
 - CO2 value of things in the hardware
 - Look at how to use when we need to do
 - o Glass testing
 - Calibration test for optical information
 - Use the same code with and without glass of things if we have many with you can look at edge with and edge sensitivity using a glassed in working with
 - o Recovery testing period
 - Repeat the graph of internal conditions in time
 - How to get into the for testing
- Hardware
 - o How to get the or how to get the hardware to get things a different case
 - o Side what something is
 - o Dig into the hardware - the elements available on how the sensors do it
 - To make or how to get a lot of hardware is

[Download](#)

Advisor_Meeting_11_12_2021.docx (564 kB)



11/19/2021 Advisor Meeting #7

MAYA TANNA - Nov 25, 2021, 2:41 PM CST

Title: Advisor Meeting #8

Date: 11/19/2021

Content by: Katie

Goals: To document advice given by Dr. Kinney at our weekly meeting

Content:

See attachment below.

Conclusions/action items: Execute testing and heavily investigate the CO2 tank situation.

MAYA TANNA - Nov 25, 2021, 2:41 PM CST

11/19/21 Advisor Meeting Notes (8)

- Check to see if the video didn't have content on video to test the glass
- Do everything needed
- Review
- Please to review the air and make sure it's at least 100% in charge
- CO2 tank and tank
 - Not too much progress

[Download](#)

11_19_21_Advisor_Meeting_Notes.docx (6.67 kB)



12/03/2021 Advisor Meeting #8

Katie Day - Dec 08, 2021, 9:16 PM CST

Title: Advisor Meeting #9

Date: 12/0/2021

Content by: Katie

Goals: To document advice given by Dr. Kinney at our weekly meeting

Content:

See attachment below.

Conclusions/action items: Execute testing and heavily investigate the CO2 tank situation.

Katie Day - Dec 08, 2021, 9:16 PM CST

CO2 tank advisor meeting notes #9

- Testing
 - CO2 and Temp sensing are complete
 - CO2 tanking will be completed by Monday 12/13
 - Customer contacted 2021
 - Dr. P and a student will have to use it
- The Box
 - Everything is in one place and the wiring
 - Checked for safety
- CO2
 - Just pump it in to be able to get the sensor and the tank
 - Need a warning sensor on the tank to get our own CO2 tank
- Pressure sensor
 - Day 1
 - We have to get all the
 - Doing physical structure of the tank
 - Mechanical is very similar to power presentation
 - Single color switch
 - Tank will be a gas cylinder
- Electrical sensor
 - Do we need to add to other sensors?
 - Yes
 - Tanking (12/13)
 - Tanking (12/13)
- Electrical Tank should be used with CO2 tanking
 - Show that the pressure sensor that they use not different
- There will be a video at the end of the semester and we can provide to continue the project

[Download](#)

12_03_21_Advisor_Meeting_Notes_9.docx (7.24 kB)



09/20/2021 Team Meeting #1 Working/Finalizing PDS

MAYA TANNA - Sep 20, 2021, 5:20 PM CDT

Title: Team Meeting #1 Working/Finalizing PDS

Date: 09/20/2021

Content by: Maya Tanna

Present: Sam Bardwell, Katie MCGovern, Maya Tanna, Caroline Craig, Olivia Jaekle, Ethan Hannon

Goals: To document the progress we made on the product design specifications document as a team

Content:

1. Met to discuss upcoming project deadlines and initial research done by each member of the team
2. Everyone read over the PDS and made last edits as well as references
 1. Final and submitted draft is below

Conclusions/action items: We will meet next week to start coming up with ideas for the design matrix and go over the team's relevant research. We will also continue to update the PDS if design or client requirements change throughout the semester.

MAYA TANNA - Sep 20, 2021, 5:23 PM CDT

Product Design Specifications



Microscope Cell Culture Incubator

DATE: 200109
24 September 2021

Class: Dr. John Pincus
University of Wisconsin-Madison
Department of Mechanical Engineering

Team:

Katie MCGovern
Sam Bardwell
Maya Tanna
Olivia Jaekle
Caroline Craig
Ethan Hannon

[Download](#)

Product_Design_Specifications.pdf (219 kB)



10/04/2021 Team Meeting #3 Finalizing Design Matrix

MAYA TANNA - Oct 10, 2021, 8:58 AM CDT

Title: Team Meeting #3


Date: 10/04/2021

Content by: Maya Tanna

Present: Katie McGovern, Sam Bardwell, Maya Tanna, Caroline Craig, Ethan Hannon, Olivia Jaekle

Goals: To finalize our design matrix and start evaluating potential design solutions.

Content:

									
			Past Project Refurbished	Heated Water Pump Incubator	Shelving Incubator				
Rank	Criteria	Weight	Score (10 max)	Weighted Score	Score (10 max)	Weighted Score	Score (10 max)	Weighted Score	
1	Internal Environment	25	9	23	7	18	5	13	
2	Microscope Compatibility	20	10	20	10	20	10	20	
3	Accuracy and Reliability	20	7	14	8	16	4	8	
4	Ergonomics	15	5	8	8	12	4	6	
5	Cost	10	2	2	4	4	3	3	
6	Life in Service	5	10	5	10	5	10	5	
7	Safety	5	10	5	10	5	10	5	
		Sum	100	Sum	76	Sum	80	Sum	60

Conclusions/action items:

Begin working on preliminary presentation and report and further research different materials.

Material Selection

- 3D images around the site
- [Glass, Acrylic, Silver, Steel, Lead, Aluminum, Titanium, Inconel, Stainless Steel, Polycarbonate, PEEK, Kevlar](#)
 - Can be used on the sides on the inside where the water is because it will insulate heat if connected to a black surface - 3D print is black
- [Inconel Properties](#) [Acrylic Properties](#) [Titanium Properties](#) [Aluminum Properties](#) [Steel Properties](#) [Kevlar Properties](#) [PEEK Properties](#)
 - Check for the required features
 - Make the glass top look like a replacement lid
 - Make it look like the original
 - Use a change and a seal to cover
- Make the lid look like the original and make it sealed
- [Carbon Fiber Properties](#) [Titanium Properties](#) [Aluminum Properties](#)
 - Check for the required features and make it look like the original
- 3D 4, 5

Material Requirements

- Waterproof - can hold the water
 - [Titanium](#) - seal the edges of the metal
 - [Kevlar](#) - make for the top glass layer
- Can hold a water tank
 - [Inconel](#) - make for the sides on the inside
 - [Titanium](#) - make for the sides on the outside



- [Titanium Properties](#) [Aluminum Properties](#) [Steel Properties](#) [Kevlar Properties](#) [PEEK Properties](#)

[Download](#)

Materials_and_Heating_Brainstorm.docx (612 kB)



10/11/2021 Team Meeting #4 Finalizing Presentation/Organizing Subcommittees

MAYA TANNA - Oct 18, 2021, 5:28 PM CDT

Title: Team Meeting #4 Finalizing Presentation/Organizing Subcommittees

Date: 10/11/2021

Content by: Maya Tanna

Present: Katie McGovern, Sam Bardwell, Maya Tanna, Caroline Craig, Ethan Hannon, Olivia Jaekle

Goals: To finalize our presentation and make revisions according to Dr. Kinney's feedback

Content:

Hi Katie,

Great job – my comments are below:

- Include your advisor/client and the date on your title slide
- You don't need a presentation overview slide
- Great job with a quantitative PDS!
- Competition: are there other small/low cost incubators that have been developed outside of UW BME design?
- Make sure that the labels on your figures are large enough to read easily (Fig. 5 labels are really small)
- Include a slide describing your design criteria and how they were chosen
- Label the dimensions and points of interest on all of your figures (i.e. Fig 6)
- It might be helpful to include a separate slide describing the workflow for how it will be used

Conclusions/action items:

To finalize the preliminary report and begin compiling materials for purchasing.



10/18/2021 Team Meeting #5 Materials Purchasing Organization/Final Edits on Preliminary Report

MAYA TANNA - Oct 18, 2021, 5:31 PM CDT

Title: Team Meeting #5 Materials Purchasing Organization/Final Edits on Preliminary Report

Date: 10/18/2021

Content by: Maya Tanna

Present: Katie McGovern, Sam Bardwell, Maya Tanna, Caroline Craig, Ethan Hannon, Olivia Jaekle

Goals: To finalize our report and gather all the materials for purchasing together in a document

Content:

Progress is below

Conclusions/action items:

To finalize the preliminary report and purchase materials.

MAYA TANNA - Oct 18, 2021, 5:31 PM CDT



[Download](#)

Materials_Purchasing_Request_-_Microscope_Cell_Culture_Incubator.docx (48.3 kB)



10/18/21 TeamLab Meeting Summary

SAMUEL BARDWELL - Oct 19, 2021, 1:48 PM CDT

Title: TeamLab Meeting Summary

Date: 10/18/21

Content by: Sam

Present: Sam & Ethan

Goals: To confirm the intended design for the incubator on Solidworks is feasible and what type of adaptors to use between the tubing.

Content:

Notes:

Pipe threading

Rubber Strips

Epoxy is available

Conclusions/action items:

The TeamLab professional saw no problems with our intended design for the project. The biggest questions were surrounding the adaptors between the tubing of the metal and heated water pump. There were a couple ways to go about connecting these and one would be to thread the pipe and the screw on an adaptor to one side and then epoxy the other. The next idea was to just epoxy the metal side of the adaptor and connect the other. The adaptor would have to have a ribbed cone shape for the rubber tubing from the heated water pump to being pushed on. This could then be surrounded with a zip tie to make sure it stays on when the water is being pumped. The professional also said there are different types of epoxy's that would work better for different materials and some research should be done to find which epoxy to use.



10/23/2021 Ace Hardware Visit

MAYA TANNA - Oct 27, 2021, 11:08 AM CDT

Title: Ace Hardware Visit

Date: 10/23/2021

Content by: Maya

Present: Maya & Sam

Goals: To document findings on part specifications from Ace Hardware as well as future action items based on that information

Content:



Rubber water hose heats up to 150 degrees Fahrenheit (we are looking for 98 degrees Fahrenheit) - research if it is effective.

Conclusions/action items: Do more research on vinyl tubing and rubber water hoses (fuel line hose). Look into copper rust specifications to determine feasibility of using copper.

MAYA TANNA - Oct 27, 2021, 11:29 AM CDT



[Download](#)

Ace_Hardware_Visit_Pictures.docx (3.97 MB)



11/05/2021 Show and Tell Feedback

MAYA TANNA - Nov 05, 2021, 2:40 PM CDT

Title: Show and Tell Feedback

Date: 11/05/2021

Content by: Maya

Present: Whole Team

Goals: To document feedback received from other teams regarding sensor and tubing placement

Content:

- Zig zag needs pegs to hold in place
- Sensors on the top
- Carbonate water
- Hydrophilic materials
- Just use waterproofed sensors? RESEARCH
- CO2 sensor waterproofing test protocol
- Zig zag best idea, but secure
- Tubing: twice wrap around, tubing coming out of incubator above water
- Waterproof fabric (rain coat material)
- Randomized zig zag
- Thermistor, coating that works with temperature but waterproof
- Get curve and calibration stuff from class
- Snail system with tubing
- Look into ideas for water proofing the sensors (rubber, styrofoam)
- Test coiled vs. uncoiled tubing (tubing test protocols)

Conclusions/action items: Use a thermistor for measuring temperatures. Write test protocols for tubing and CO2 sensor waterproofing. Use snail system with tubing.

- Finally, the Shelving Incubator scored lowest with a 4 because it would be the most difficult to use with having to pull out drawers each time one wanted to view a sample.
- Cost
 - All the designs scored low for cost because our team's smaller budget will be difficult to stay in range with. The Heated Water Pump Incubator scored the best with a 4 because lots of the components we plan on using will be provided to us. Our biggest difficulty in staying within the budget will be limiting the need to repurchase materials wasted in prototyping.
 - The Past Project Refurbished design scored a 3 because components of the previous design would be reused, but the components we plan on replacing would end up being more expensive than just creating the Heated Water Pump Incubator design.
 - The Shelving Incubator scored lowest with a 2 because its size would increase the cost and create a greater likelihood to go over budget if lots of prototypes are made.
- Life in Service
 - All the designs scored a 10 for Life in Service because they were designed with the intent of functioning for a week period of time every year for 10 years.
- Safety
 - All the designs scored a 10 for safety because the components involved in their designs would not be harmful to the user in any way.

Conclusions/action items:

Based on this design matrix, our team will be moving forward with creating the Heated Water Pump Incubator for our client. This design was ranked the reliable, ergonomic, and cost-effective in comparison with the other designs. The design will include a slot for the well plate, a tube containing heated water to maintain a 37°C temperature and assist in evaporation, and a water well for evaporation water to maintain high humidity. The dimensions of the incubator will match the size of the microscope stand, or it will go over the edges slightly, and the height will not exceed the lowest point of the top light microscope component. Finally, sensors compatible with Arduino will be used to regulate the internal conditions.



10/19/21 Preliminary SolidWorks Incubator Design

SAMUEL BARDWELL - Oct 19, 2021, 1:22 PM CDT

Title: Preliminary SOLIDWORKS Incubator Design

Date: 10/19/21

Content by: Sam

Goals: To create a detailed Solidworks assembly and drawing of the proposed incubator design.

Content:

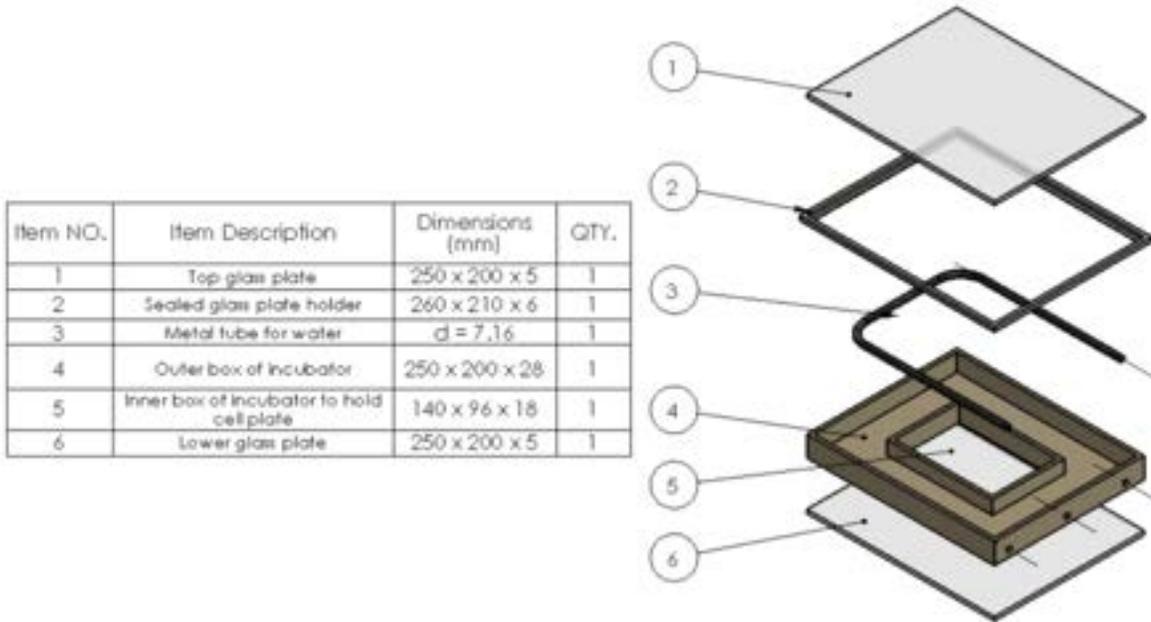


Figure 1: Exploded view of the Solidworks drawing showing the part names and descriptions.

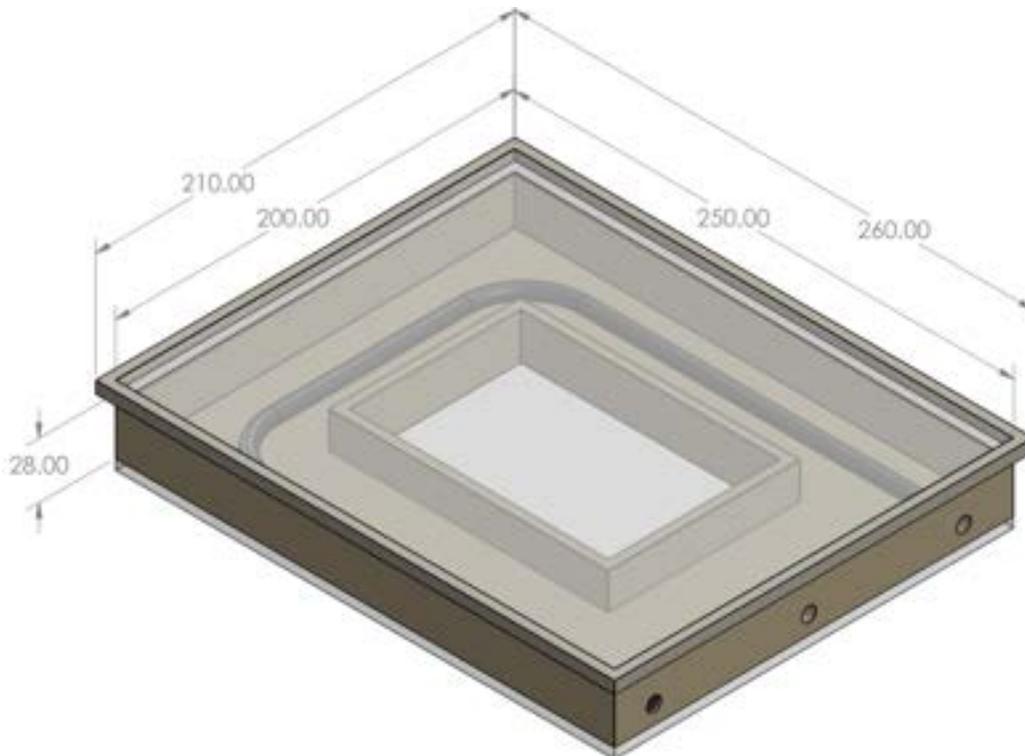


Figure 2: Collapsed view of incubator with dimensions of the box.


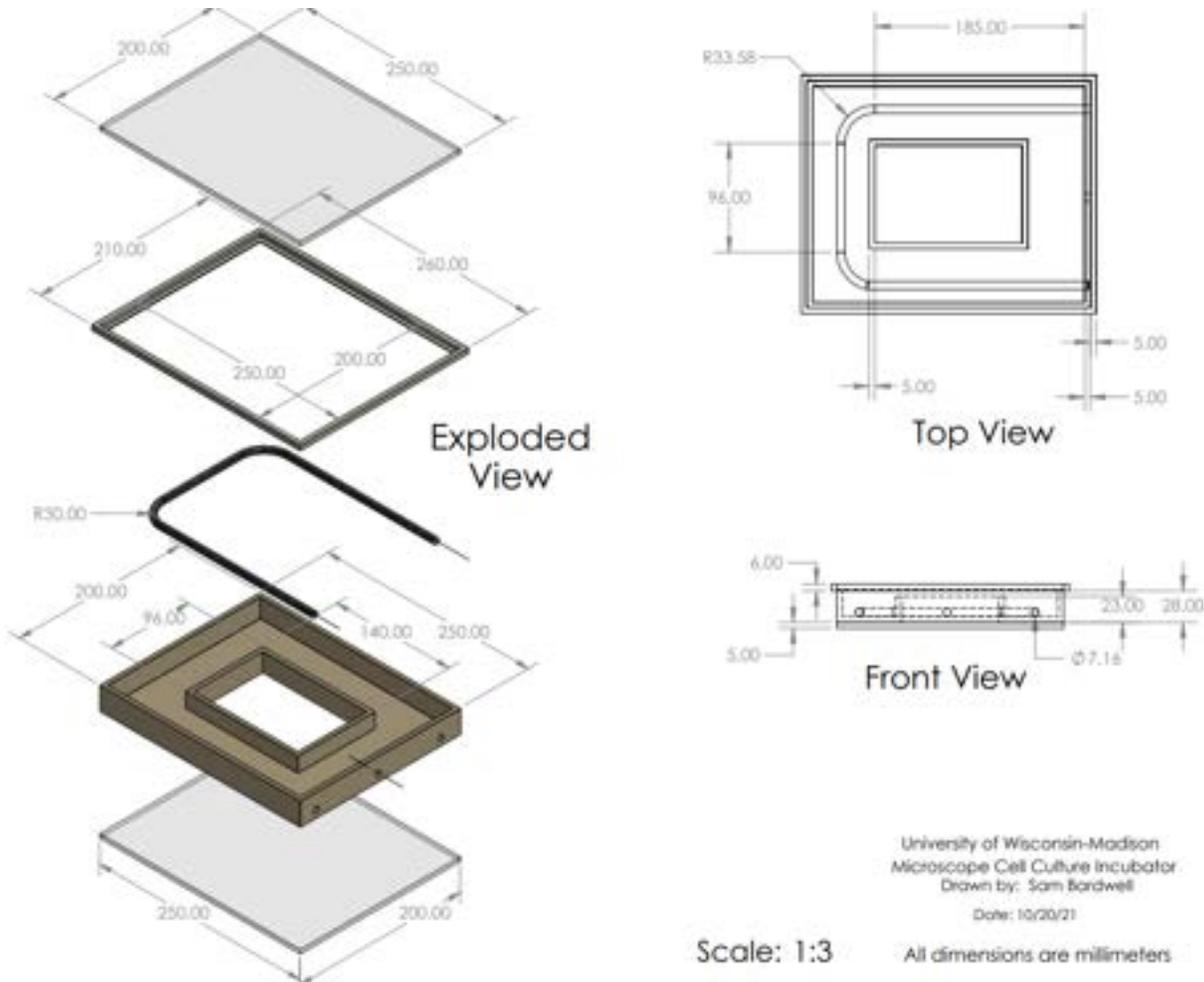


Figure 3: Solidworks drawing showing more detailed dimensions of all the parts in the incubator.

Conclusions/action items:

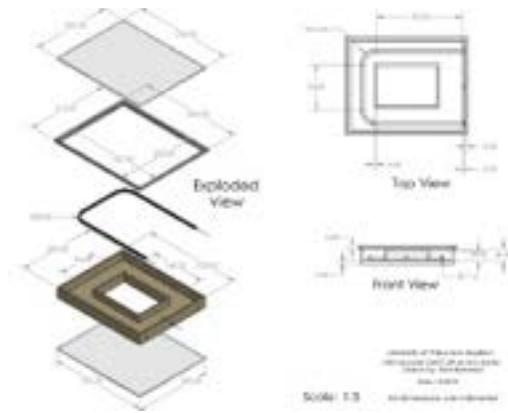This is the preliminary design we are going to continue going forward with. The next step are to obtain the materials needed to fabricate the incubator. Once materials arrive, final touches and dimensions will be updated to the Solidworks design and then the box will be 3D printed at the UW - Madison Makerspace.



[Download](#)

BME300_Incubator__Drawing_10.19.21.pdf (196 kB)



11/05/2021 Show and Tell Preparations

MAYA TANNA - Nov 05, 2021, 2:54 PM CDT

Title: Show and Tell Preparations

Date: 11/05/2021

Content by: Maya/Caroline/Katie

Present: Whole Team

Goals: To document work done to prepare for show and tell

Content:

Hi everyone! Our team has been tasked with developing a low-cost cell culture incubation chamber that is compatible with an inverted microscope and capable of live-cell imaging culture plates. The incubator must be able to maintain an internal environment of 37°C, 5% CO₂, and 95-100% humidity without compromising the integrity of the microscope's optics or functionality. Our final design consists of a heated water pump where a conducting plastic tube will be wrapped around the inside of the incubator and connected to a heated water pump that will be set to 37°C. The inside of the incubator will be filled with water, submerging the plastic tubing, allowing the internal environment to be heated by conduction as well as increasing the humidity to 95% or higher. The incubator box will also include a tube connector to allow CO₂ gas to be pumped in. Lastly, a separate box will be placed inside the incubator to allow for wiring and sensors to be inside the internal environment. The sensors will be connected to an Arduino microcontroller where temperature, humidity, and CO₂ levels will be collected and analyzed. Our call to action is to ask for your help on how we can arrange the plastic tubing or sensors in order to achieve a homogeneous temperature environment.

Conclusions/action items: Use feedback from show and tell to drive the remainder of the semester and continue testing/fabrication of device.

MAYA TANNA - Nov 05, 2021, 2:54 PM CDT



[Download](#)

Show_and_Tell_Presentation.jpg (55.5 kB)



10/18/2021 - Future Expenses Table

Caroline Craig - Oct 18, 2021, 7:26 PM CDT

Title: Future Expenses Table

Date: 10/18/2021

Content by: Team

Present: Team

Goals: To document and update the expenses table with purchases throughout the fabrication process.

Content:

Item	Description	Manufacturer	Part Number	Date	QTY	Cost Each	Total	Link
Category 1 : Incubator								
3D Printed Casing	for sides of incubator	Makerspace			1	\$20.00	\$20.00	
Transparent Cover Plates	top and bottom of incubator	Radnor	64005034		2	\$1.04	\$2.08	https://www.ainos.com/
Plastic Latches	secure lid to incubator	Cambro	Cambro 60264		4	\$4.69	\$18.76	Cambro 60245 2 Hole Pla
Rubber Lining Tape	create tight seal between lid and incubator	Makerspace			1	\$0.00	\$0.00	
Insulating, Waterproof Mat	lining the 3D printed sides of the incubator	Makerspace			1	\$0.00	\$0.00	
Category 2 : Components								
3/8x12 Stainless Steel Tube	heated water will flow through	K & S Precision Metals	87119		1	\$6.00	\$6.00	LINK
3/8 in. Compression Brass Coupler	to connect the stainless steel tube to water pump	Everbuilt	207176323		2	\$3.65	\$7.30	LINK
1.5mm Tube Connector	connection between CO2 tank and incubator	Fisher Scientific	35031		1	\$14.96	\$14.96	LINK
Arduino 2x16 character Display		MIDAS	7773012		1	\$12.71	\$12.71	Alphanumeric LCD
Arduino Operational Amplifier		ONSEMI	LM324ADR2G		1	\$0.28	\$0.28	Texas Instruments Genesi
Arduino SD card logging shield		VELLEMAN	WP304		1	\$4.01	\$4.01	SD card logging shield V1
						TOTAL:	\$86.10	

Conclusions/action items:

The items documented in the table are potential future purchases for our team. A list including these materials has been sent to the client for purchasing, however, the stainless steel tube and 1.5mm tube connector are still being reviewed for potential cheaper or free options through the client. Other components are being reused from previous team's projects, and improved rubber lining tape and insulating mat will be purchased in the future if needed. With purchases in progress, the team is projected to come in under budget for the final design.



12/06/2021 - Expenses Table

Caroline Craig - Dec 11, 2021, 9:44 PM CST

Title: Expenses Table

Date: 10/18/2021

Content by: Team

Present: Team

Goals: To document and update the expenses table with purchases throughout the fabrication process.

Content:

Item	Description	Manufacturer	Part Number	Date	QTY	Cost Each	Total	Link
Category 1 : Incubator								
3D Printed Casing	for sides of incubator	Makerspace		11/9/2021	1	\$32.32	\$32.32	N/A
Transparent Cover Plates	top and bottom of incubator	Radnor	64005034	10/29/2021	2	\$1.04	\$2.08	https://www.alphas.com/product
Category 2 : Components								
3/8 and 1/4 in. Polyethylene Tubing	heated water will flow through	USA Sealing	55YU99	11/23/2021	1	\$1.96	\$1.96	LINK
Epoxy glue	to attach loose components	Makerspace				\$1.50	\$0.00	N/A
1.5mm Tube Connector	connection between CO2 tank and incubator	Fisher Scientific	35031	10/29/2021	1	\$14.96	\$14.96	LINK
Vinyl Tubing 3/8" x 1/2"	heated water will flow through	Ace Hardware	4027504	12/6/2021	1	\$8.33	\$8.33	N/A
Barbed Vacuum Connector	connection between tubing	Grainger	52MH6	11/23/2021	2 (of 10)	\$0.95	\$1.90	LINK
TOTAL:							\$61.55	

Conclusions/action items:

The items documented in the expenses table are the items that were purchased for our microscope cell culture incubator. All costs were covered by the client. Other components are being reused from the previous team's projects, so the cost of those materials is not included in the expenses table. If the project were to be reproduced from scratch the total cost would be roughly \$150. Altogether the team came in under budget for the final design.



11/29/2021 Box Fabrication: 3D Print

SAMUEL BARDWELL - Dec 05, 2021, 5:16 PM CST

Title: Box Fabrication: 3D Print

Date: 11/29/21

Content by: Sam

Goals: To 3D print the incubator box and assemble it.

Content:

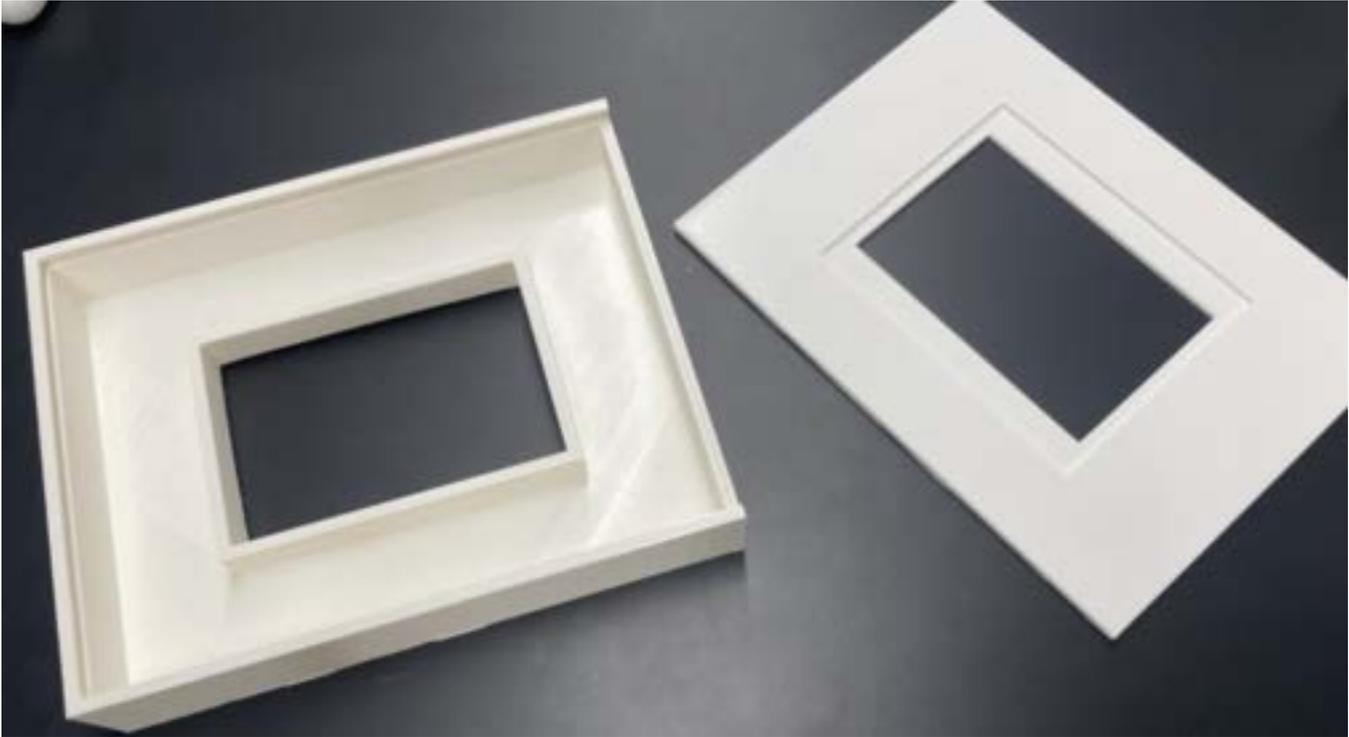


Figure 1: Top view of incubator box and crown 3D prints

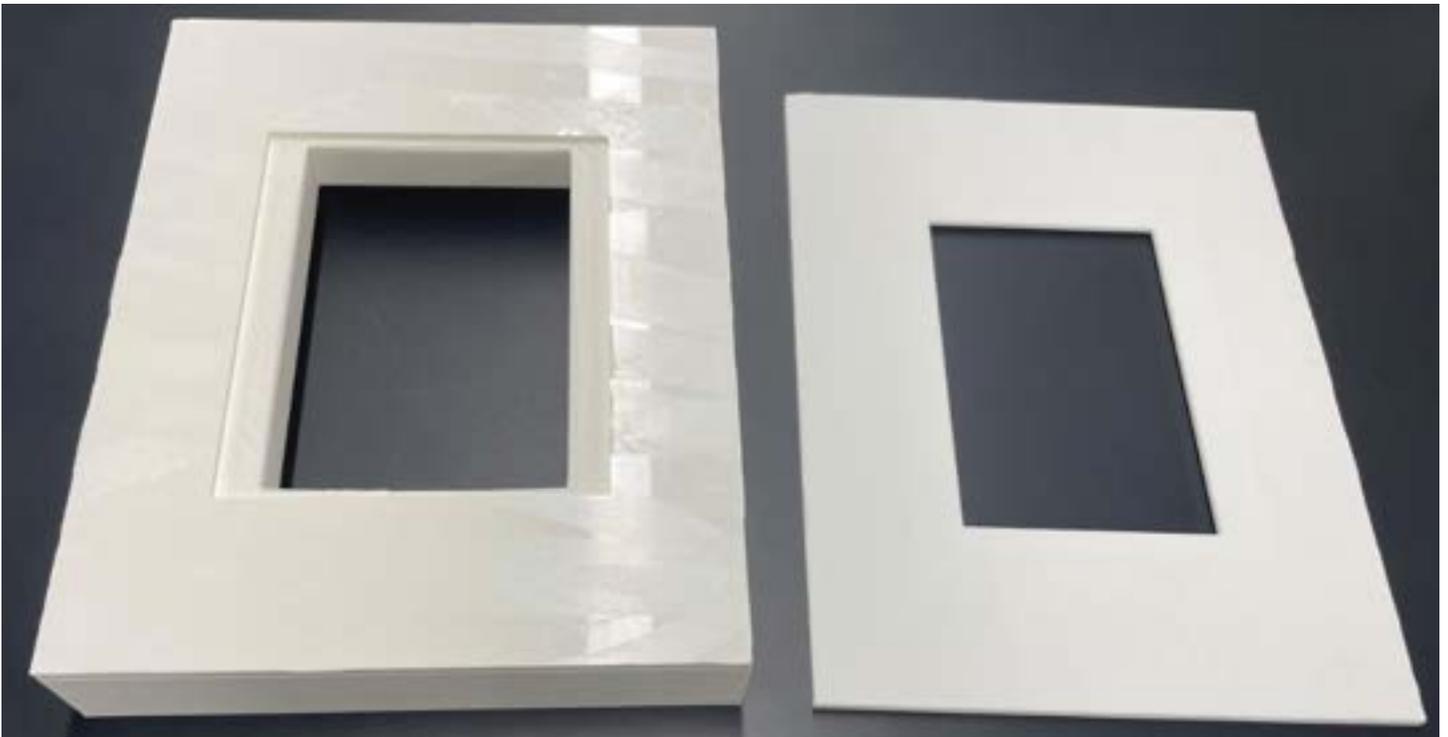


Figure 2: Bottom view of incubator box and crown 3D prints



Figure 3: Assembled 3D printed incubator box.

Conclusions/action items:

The printed box turned out nicely. There are a couple straggling PLA plastic strings from the 3D printer. Sliding in the crown of the box to the slit printed into the box is a little difficult and not smooth, but it does go all the way in. Next steps are to epoxy the glass to the plastic squares as well as drill holes into the plastic and epoxy adaptors and tubing to the box as well.



11/29/2021 Hardware Setups


SAMUEL BARDWELL - Dec 09, 2021, 1:26 PM CST

Title: Hardware Setups

Date: 11/29/21

Goals: To show photos of the electrical set up for the sensors in the incubator.

Content:

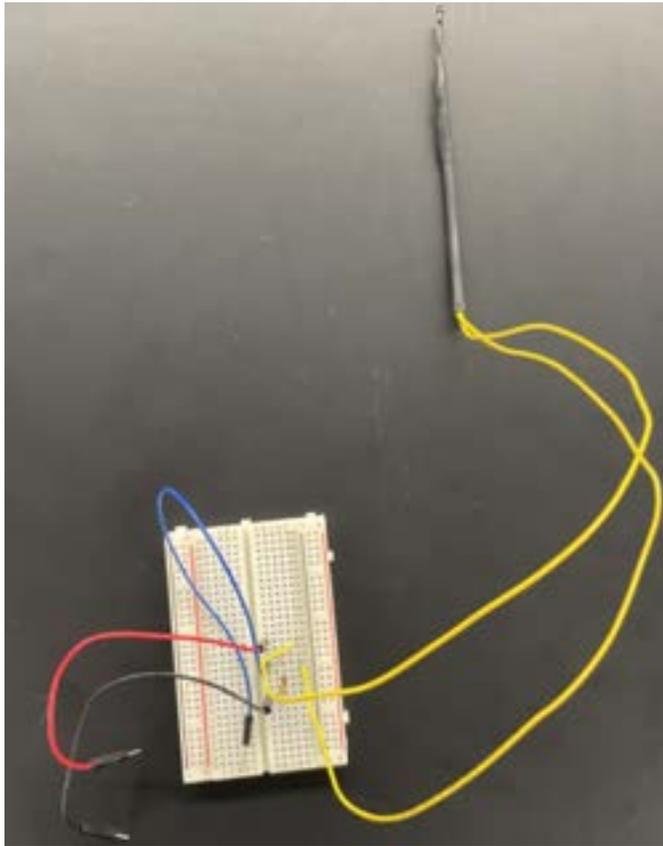

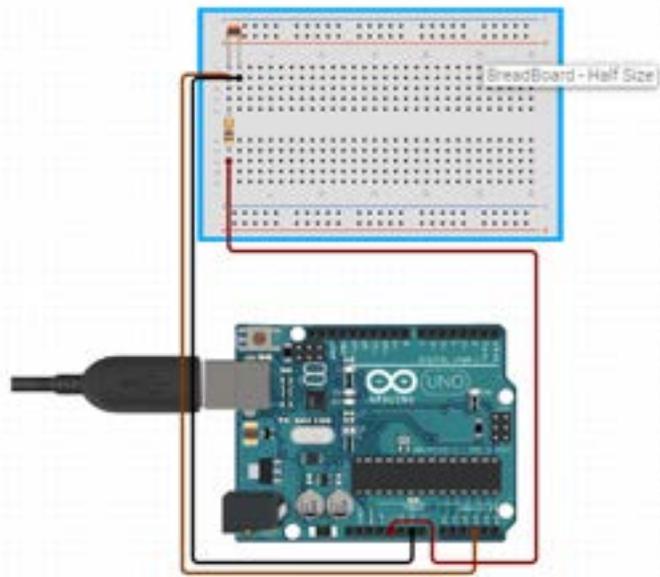


Figure 1: Thermistor hardware set up.

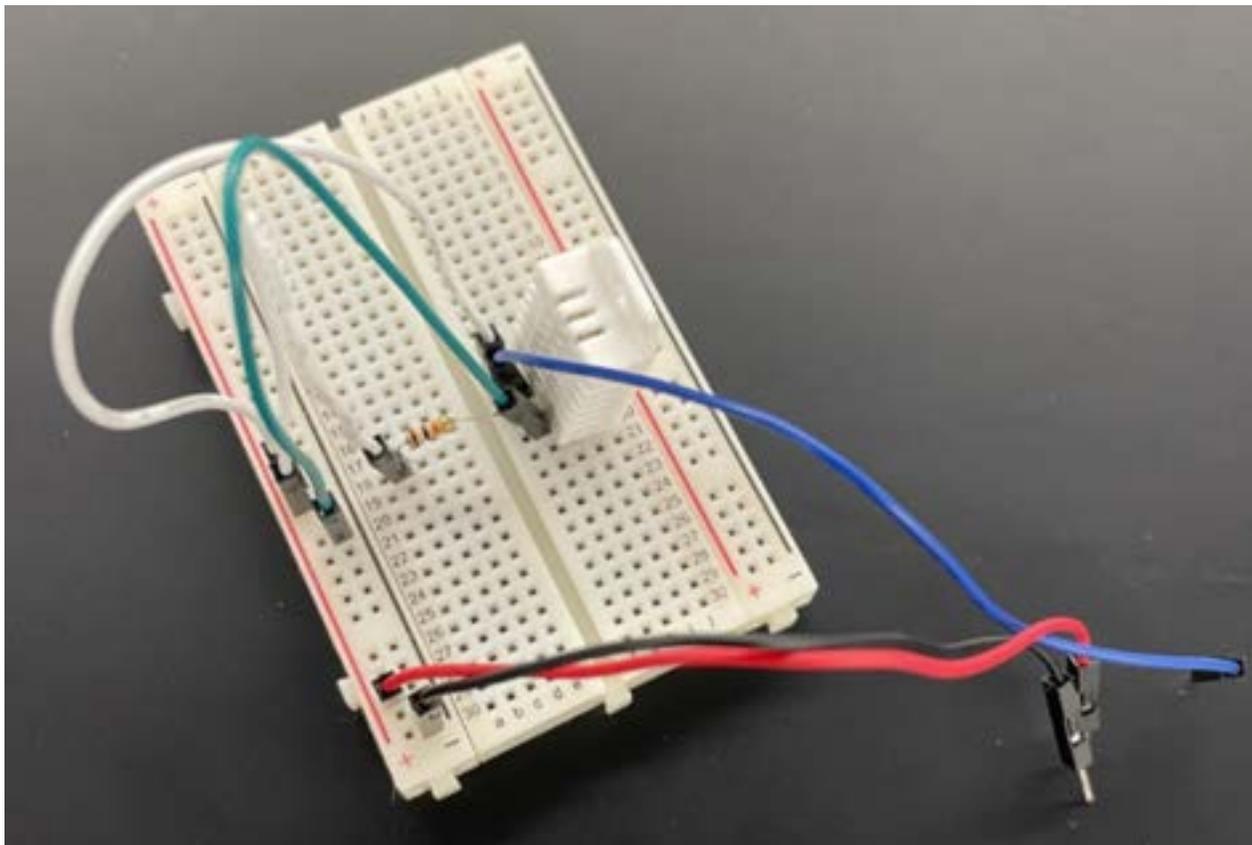


Figure 2: DHT22 sensor hardware set up

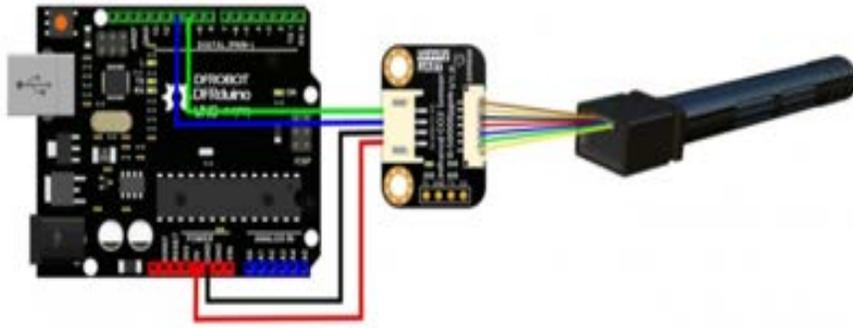


Figure 3: CO2 sensor hardware set up

Conclusions/action items:

All of the sensors are up and running. The coding and the schematics will be added to the notebook. Next is to test the sensors and eventually implement them into the incubator box design.



12/07/2021 Incubator Fabrication

Katie Day - Dec 07, 2021, 8:04 PM CST

Title: Incubator Fabrication

Date: 12/07/2021

Content by: Katie McGovern

Present: Katie McGovern and Sam Bardwell

Goals: To fabricate the incubator.

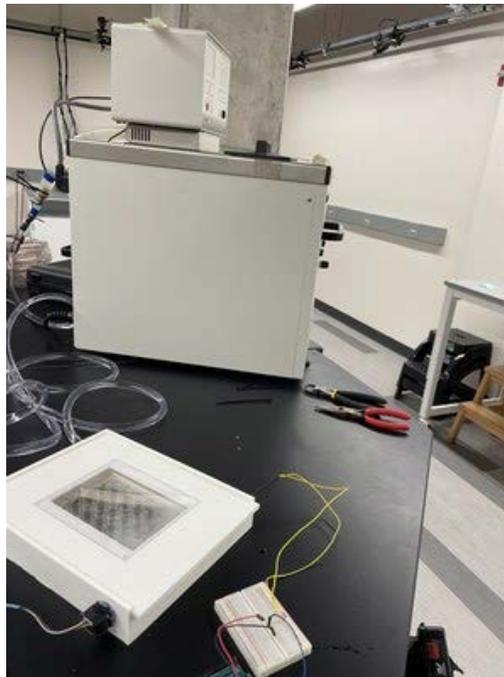
Content:

The box was fabricated by first drilling 3/8 inch diameter holes in the front of the box and then using a circular file to expand them so that the barbed connectors could fit in the incubator. They were then hot glued. The glass was hot glued onto the small divot made for them in the design. A 1/4 inch hole was drilled on the bottom right corner for the thermistor and filed with a circular file. A 1/2 inch hole was drilled and expanded via circular file for the CO2 sensor to fit in. The CO2 sensor and the thermistor were hot glued into place. The 3/8x1/4 inch tubing was wrapped in a circular fashion along the interior of the box and connected to the barbed vacuum connectors. They were then secured by zip ties. They were connected to a 1/2x3/8 inch tubing that was secured via zip ties to both the connector and the hot water pump. Then roughly 16 oz of water was poured into the incubator.

Conclusions/action items:

The PLA material needs to be changed as it was difficult to drill into, very brittle, and appeared to be leaking in random places.


Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5896.jpg (780 kB)

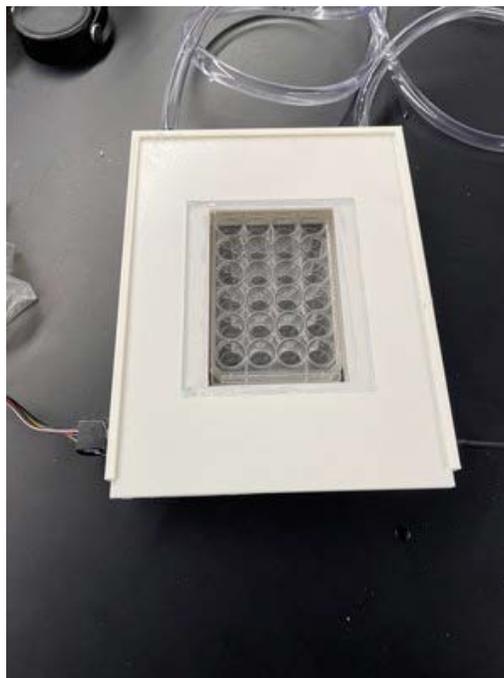Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5894.jpg (1.19 MB)


Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5893.jpg (1.19 MB)

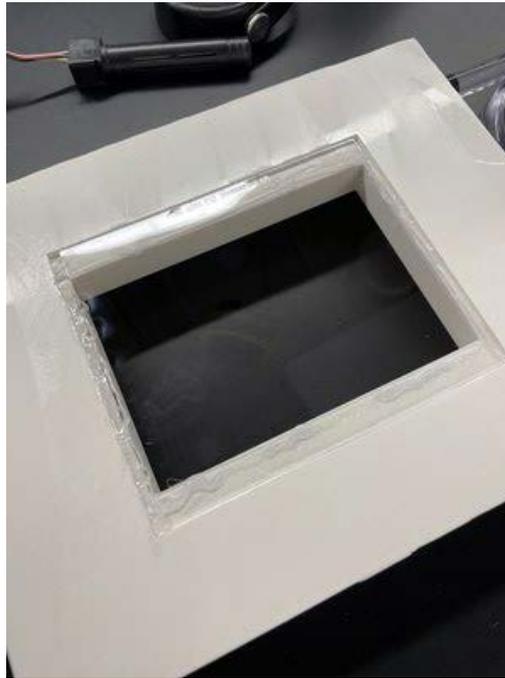
Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5892.jpg (597 kB)

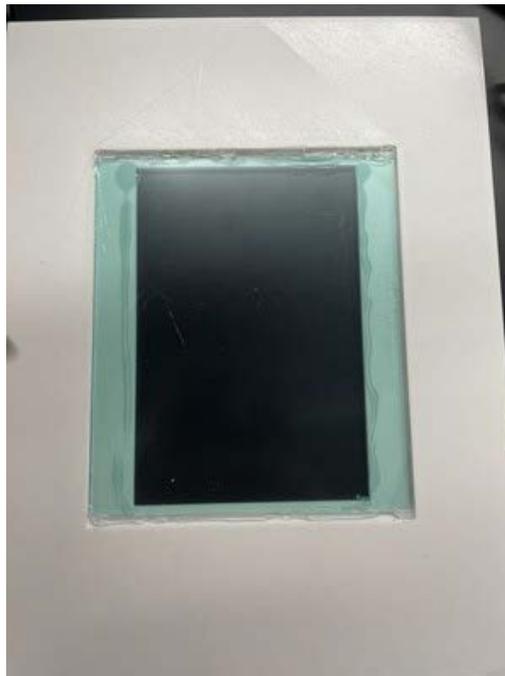Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5891.jpg (875 kB)

Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5890.jpg (404 kB)

Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5889.jpg (1.27 MB)


Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5888.jpg (780 kB)

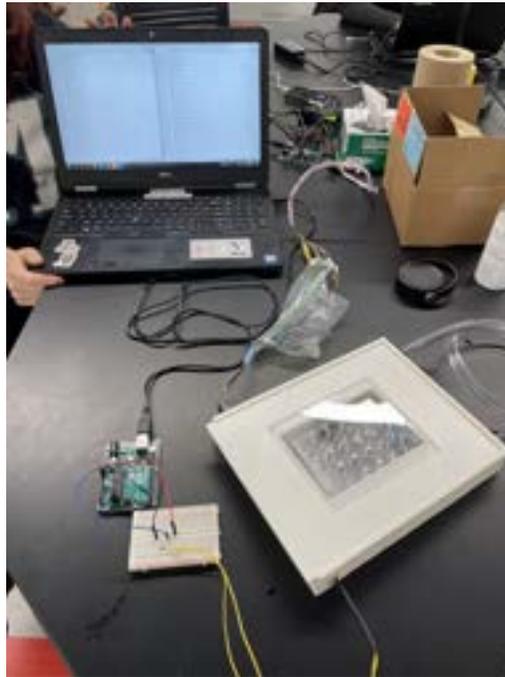Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

IMG_5895.jpg (693 kB)



11/01/2021 Testing Protocols Initial Draft

MAYA TANNA - Nov 05, 2021, 2:51 PM CDT

Title: Testing Protocols Initial Draft

Date: 11/01/2021

Content by: Caroline and Maya

Present: Team

Goals: To document the initial draft of test protocols that were sent to Dr. Kinney for review/approval

Content:

See attachment below.

Conclusions/action items: Use feedback from Dr. Kinney to improve test protocols as well as feedback from Show and Tell to add components to test to ensure the most successful final design.

MAYA TANNA - Nov 05, 2021, 2:51 PM CDT

Abstract Experiment - Temperature and Humidity Sensor Test Protocol

Introduction:
 Name of Topic:
 Goals of Test Performance:
 Title of Test Performance:

Objectives:
 The team will be analyzing a sensor inside the incubator in order to measure the environmental conditions. The environmental conditions (humidity and temperature) will be measured by an ADXL345/HTU21D module (compatible sensor). The team will first be making sure that the code will be running correctly by calibrating the sensor and then measuring humidity and temperature and the humidity range using the sensor. To calibrate the sensor, the team will first check the sensor is calibrated. Accuracy will be tested by first measuring the temperature and humidity of the sensor in a known range. If the sensor is not working as expected, and the measuring the temperature at extreme (high and low) humidity using a high oven and freezer. Afterwards, the team will increase the temperature inside the incubator with a thermometer and the sensor. To keep the incubator completely sealed, the thermometer probe will be placed inside the incubator and connected to the sensor when it is inside. PSD of the incubator for temperature.

Step	Procedure	Observation/Validation	Pass/Fail	Notes of Tester
1	Set up the incubator for testing with the ADXL345/HTU21D sensor inside.	• Verified Comments		
2	Set up the incubator sensor and measure the humidity and temperature.	• Verified Comments		
3	Record the average temperature of the system from the sensor in the incubator, taking measurements every 10 seconds over a period of 30 minutes. Verify that the temperature falls within the required range of 10-15°C. All the measurements should not be collected correctly by first measuring the temperature of water temperature inside the incubator (10-15°C).	• Verified Comments		
4	Record the average temperature of	• Verified		

[Download](#)

Testing_Protocols_1_.docx (597 kB)



11/15/2021 Incubator User Manual

Katie Day - Dec 07, 2021, 8:08 PM CST

Title: Incubator User Manual

Date: 11/15/2021

Content by: Sam Bardwell and Ethan Hannon

Present:

Goals: To establish a user manual to determine how to use the incubator once printed.

Content:

See attached user manual.

Conclusions/action items:

Katie Day - Dec 07, 2021, 8:09 PM CST

- Start up Process**
- 1) Remove shipping foam from incubator
 - 2) Connect heated water supply tubing to the fitted connection on incubator
 - 3) Connect CO₂ tank tubing to the inlet
 - 4) Place incubator onto the storage shelf
 - 5) Turn on heated water pump and set water temperature to 37°C
 - 6) Fill incubator with nitrogen (N₂) water to submerge the tubing
 - 7) Turn on CO₂ flow and purge to bring internal environment to 5% CO₂ level
 - 8) Remove tubing cover located on incubator
 - 9) Allow time for internal environment to be set to 5% CO₂, 37°C and 95-100% humidity
 - 10)
- Seeding Media/Cells**
- 1) Add a pre-cultured cell to proper well plate cavity
 - 2) Insert a 100µm x 100µm or smaller seed plate into designated cavity
 - a) DO NOT use a well plate larger than dimensions given
 - 3) Add cover slip back into place on incubator
 - a) make sure seal is firm in place
 - b) DO NOT open until the incubator has completely and steadily set to required conditions (well cover/pump/ internal environment off/checked)
- Data Acquisition**
- 1) Connect software to incubator to a given source
 - 2) Set up sensors to collect the data you require to take
 - 3) Make sure designated seeds are cultured. DO NOT open the plate until the sensor data
 - 4) Record any desired readings from the data
- Cleaning and Disassembly**
- 1) Allow time for sensor removal and disconnection
 - 2) Empty the water from wells
 - 3) Remove external well cover tubing from incubator
 - 4) Done

[Download](#)

Incubator_User_Directions.pdf (47.4 kB)



11/19/2021 Testing Protocols Final Version

MAYA TANNA - Nov 25, 2021, 2:44 PM CST

Title: Testing Protocols Final Version

Date: 11/19/2021

Content by: Maya/Caroline

Goals: To document the final draft of the testing protocols, which were edited based on the team and advisor's feedback

Content:

See attachment below.

Conclusions/action items: Execute testing wherever possible and investigate CO2 component of the project.

MAYA TANNA - Nov 25, 2021, 2:45 PM CST

Internal Environment - Temperature and Humidity Sensor Test Protocol

Introduction:
 Name of Team:
 Course/Field Performance:
 Title of Test Performance:

Objectives:
 The team will be analyzing a sensor from the incubator in order to measure the internal environment. The measurement of the humidity and temperature will be compared to an additional CO2 sensor in a separate device. The team will also be using a data logger to store data for later and the Arduino are using a circuit for interfacing the sensor and then connecting to a laptop to read the data and process the data using a spreadsheet. To calibrate the sensor, the team will use a reference sensor to provide accurate readings. Once the device is calibrated, the accuracy will be tested by comparing the temperature and humidity of the working environment in a room if they are both working as expected, and then measuring its temperature decrease by using the temperature and humidity sensor. Afterward, the team will measure the temperature inside the incubator with a thermometer and the sensor. To keep the incubator completely sealed, the thermometer and data logger display will be connected via the temperature and humidity sensor. The data will be compared to see if the sensor value is within 2% of the thermometer's readings.

Step	Procedure	Verification/Validation	Pass/Fail	Initials of Tester
1	Calibrate the sensor using a reference sensor in a glass beaker.	• verified Continued		
2	Test the accuracy of the Arduino temperature sensor by using a reference sensor in a glass beaker. Record the accuracy of the temperature output by using the Arduino IDE. Record the accuracy of the temperature output by using the Arduino IDE. Record the accuracy of the temperature output by using the Arduino IDE.	• verified Continued		
3	Setup the incubator to connect the temperature and humidity sensor to the system.	• verified Continued		

[Download](#)

Testing_Protocols_Template_1_.docx (599 kB)



12/03/2021 CO2

Katie Day - Dec 07, 2021, 8:05 PM CST

Title: CO2 Testing

Date: 12/3/2021

Content by: Katie, Olivia, Maya, and Caroline

Present: Katie and Olivia

Goals: To test the CO2 sensor to make sure that it is working properly.

Content:

Attached our the results of our testing, testing protocols written by Maya and Caroline, performed by Olivia and me.

Conclusions/action items:

The CO2 sensor is ready for incorporation into the incubator.

Katie Day - Dec 07, 2021, 8:05 PM CST



[Download](#)

concentration.csv (2.43 kB)

Katie Day - Dec 07, 2021, 8:05 PM CST



[Download](#)

concentration_graphs.csv (2.34 kB)



12/03/2021 Thermistor

Katie Day - Dec 07, 2021, 8:05 PM CST

Title: Thermistor Testing

Date: 12/3/2021

Content by: Katie, Olivia, Maya, and Caroline

Present: Katie and Olivia

Goals: To test the accuracy of our thermistor against an incubator.

Content:

Testing protocol written by Maya and Caroline and performed by Olivia and me. Results are below.

Conclusions/action items:

Thermistor is working properly and ready for implementation.

Katie Day - Dec 07, 2021, 8:05 PM CST



[Download](#)

Misty_In_Incubator_10-min.PNG (15.4 kB)



12/03/2021 Humidity

SAMUEL BARDWELL - Dec 11, 2021, 1:53 PM CST

Title: Humidity Testing

Date: 12/3/2021

Content by: Katie and Olivia

Present: Katie and Olivia

Goals: To test the accuracy of our humidity formula against the DHT22 sensor

Content:

Humidity data gathered over time in order to perform ttest to determine statistical significance compared to the DHT22 sensor.

	<i>Variable 1</i>	<i>Variable 2</i>
Mean	12.61830986	12.16718182
Variance	0.090374245	0.424219419
Observations	71	220
Hypothesized Mean Difference	0	
df	255	
t Stat	7.973463829	
P(T<=t) one-tail	2.59912E-14	
t Critical one-tail	1.650851092	
P(T<=t) two-tail	5.19824E-14	
t Critical two-tail	1.96931057	

Figure 1: T-test results comparing the thermistor humidity readings to the DHT22 readings.

Conclusions/action items:

Send data to caroline, olivia, and maya for analysis. The t-test was determined to be significant (significance value of .05). This is not what we expected because the average values are within .5% between the DHT22 and thermistor. We will most likely have to improve the calibration of the thermistor if we want to continue with this project.

Katie Day - Dec 07, 2021, 8:05 PM CST



[Download](#)

Misty_Humidity_Data.csv (1.55 kB)



12/05/2021 Optical Testing

Caroline Craig - Dec 11, 2021, 9:47 PM CST

Title: Optical Testing

Date: 12/05/2021

Content by: Caroline Craig and Maya Tanna

Present: Caroline Craig and Maya Tanna

Goals: To determine whether or not the glass being used interfered with the optics of the microscope.

Content:

ImageJ Results of the Optical Testing

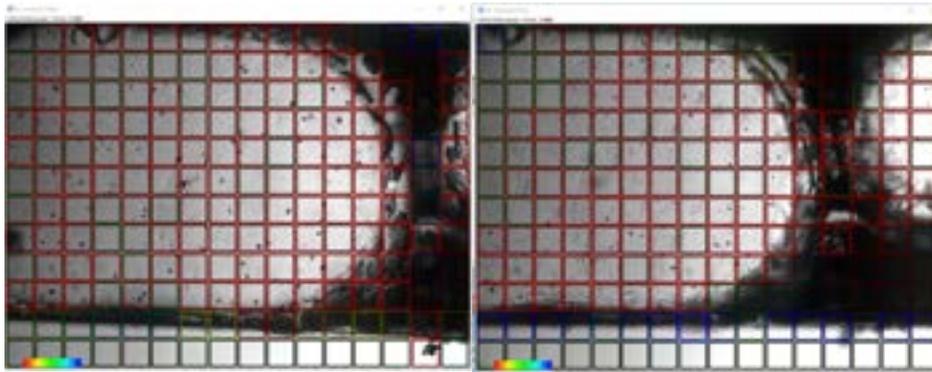


Figure 13: Optical analysis from ImageJ of microscopic cells with glass (left) and without glass (right)

Conclusions/action items:

The Optics were not interfered with.

MAYA TANNA - Dec 11, 2021, 8:25 PM CST

	Microscope Image with Glass	Microscope Image without Glass
Red Squares	130	120
Green Squares	54	51
Blue Squares	8	21
Total	192	192

MAYA TANNA - Dec 11, 2021, 8:26 PM CST

Results from this test show that the image with the glass had a slightly higher, yet very similar focus quality compared to the image without glass present.



12/07/2021 Attempted Incubator Testing

Katie Day - Dec 07, 2021, 8:04 PM CST

Title: Attempted Incubator Testing

Date: 12/07/2021

Content by: Katie McGovern and Sam Bardwell

Present: Katie McGovern and Sam Bardwell

Goals: To initially determine whether or not our incubator was working as expected.

Content: Data collected during testing.

Conclusions/action items:

1. Polyethelene tubing acted more as an insulator than a conductor and would not heat up the water bath to the desired temperature.
Need to use a metal tube.
2. PLA box was leaking slightly. It is unclear where or how it is leaking as it has been sealed via hot glue and zip ties.
3. Glass did fog up after about 30 minutes so we will need to figure out how to demist the glass.

Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

Incubator_Temp_Over_Time.csv (5.1 kB)

Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

Incubator_Temp_Over_Time.PNG (68.7 kB)

Katie Day - Dec 07, 2021, 8:04 PM CST



[Download](#)

Incubator_Temp_Hum_Over_Time.csv (5.1 kB)



[Download](#)

Actual_Inc_HUm_Data.csv (2.19 kB)



09/24/2021 Product Design Specifications

SAMUEL BARDWELL - Sep 21, 2021, 7:12 AM CDT

Title: Product Design Specifications

Date: 9/24/21

Content by: Everyone

Present: Everyone

Goals: To create a PDS in order to show our intended project in great detail.

Content:

PDF of PDS is attached

Conclusions/action items:

We will follow this PDS throughout the entire project to make sure we create a device that meets the clients needs.

SAMUEL BARDWELL - Sep 21, 2021, 7:13 AM CDT

Product Design Specifications



Microscope Cell Culture Incubator

HW 02 2021
24 September 2021

Class: Dr. John Pustowl
University of Wisconsin-Madison
Department of Mechanical Engineering

Team:

Katie McClellan
Sam Bardwell
Maggie Tamm
Oliver Smith
Caden King
Ellen Hansen

[Download](#)

Product_Design_Specifications.pdf (219 kB)



09/27/2021 Design Matrix

MAYA TANNA - Oct 10, 2021, 9:11 AM CDT

Title: Design Matrix

Date: 09/27/21

Content by: Everyone

Present: Everyone

Goals: To create a design matrix to evaluate our potential solutions to the project.

Content:

See attachment below.

Conclusions/action items:

We will follow these design specifications to ensure we deliver the desired product to the client.

MAYA TANNA - Oct 10, 2021, 9:11 AM CDT

Rank	Criteria	Option 1		Option 2		Option 3	
		Score	Weighted	Score	Weighted	Score	Weighted
1	Storage Enclosure	25	12.5	15	7.5	10	5.0
2	Waterproof Enclosure	20	10.0	20	10.0	15	7.5
3	Waterproof Enclosure	15	7.5	25	12.5	20	10.0
4	Case	10	5.0	10	5.0	10	5.0
5	Light Sensor	10	5.0	10	5.0	10	5.0
6	Case	10	5.0	10	5.0	10	5.0
	Total	80	40.0	75	37.5	60	30.0

[Download](#)

Design_Matrix_.xlsx (681 kB)



10/15/2021 Preliminary Presentation

MAYA TANNA - Oct 19, 2021, 4:32 PM CDT

Title: Preliminary Presentation

Date: 10/15/2021

Content by: Katie McGovern, Sam Bardwell, Maya Tanna, Olivia Jaekle, Caroline Craig, and Ethan Hannon

Present: Whole Team

Goals: To present our preliminary findings, goals, and proposed design to our client and advisor.

Content:

Attached is the preliminary presentation.

Conclusions/action items:

Begin ordering materials and prototyping.

Katie Day - Oct 18, 2021, 3:56 PM CDT



[Download](#)

Preliminary_Presentation_Slides_1_.pdf (971 kB)



10/19/2021 Preliminary Report

MAYA TANNA - Oct 19, 2021, 10:04 PM CDT

Title: Preliminary Report

Date: 10/15/2021

Content by: Katie McGovern, Sam Bardwell, Maya Tanna, Olivia Jaekle, Caroline Craig, and Ethan Hannon

Present: Whole Team

Goals: To document our final version of the preliminary report.

Content:

See attachment below.

Conclusions/action items:

Order materials and get feedback on final design/preliminary deliverables from advisor and client.

MAYA TANNA - Oct 19, 2021, 10:04 PM CDT

Microscopic Cell Culture Incubator
Preliminary Report



EME 399-00 Design
28 October 2021

Class: Dr. John Paschall
University of Wisconsin-Madison
Department of Mechanical Engineering

Advisor: Dr. Melissa Krump
University of Wisconsin-Madison
Department of Mechanical Engineering

Team:

Co-Leader: Max Tamm
Co-Leader: Sam Bardwell
Communicator: Katie McGovern
EMSE: Olivia Jaekle
EMSE: Ethan Hannon
EMSE: Caroline Craig

[Download](#)

Preliminary_Report- Microscopic_Cell_Incubator.pdf (1.51 MB)



12/10/2021 Final Poster Presentation

Katie Day - Dec 11, 2021, 4:32 PM CST

Title: Final Poster Presentation

Date: 12/10/2021

Content by: Katie Day, Sam Bardwell, Maya Tanna, Caroline Craig, Olivia Jaekle, and Ethan Hannon

Present: Katie Day, Sam Bardwell, Maya Tanna, Caroline Craig, Olivia Jaekle, and Ethan Hannon

Goals: To present the work we have done over the course of the semester in a clear and concise fashion.

Content:

See attachment.

Conclusions/action items:

N/A

Katie Day - Dec 11, 2021, 4:33 PM CST



[Download](#)

Final_Poster_-_Final_1_.pdf (2.45 MB)



09/15/2021 Progress Report 1

Katie Day - Dec 08, 2021, 9:18 PM CST

Title: Progress Report 1

Date: 9/15/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 08, 2021, 9:18 PM CST

Message Cell Incubator

From: Dr. John H. ...
Subject: ...
To: ...
Date: 9/15/2021

Problem Statement

Develop a low cost cell culture incubator with programmable volume plates that is compatible with an open cell incubator and capable of low cell density. This incubator should be able to maintain an incubation volume of 10, 20, 30, 40, and 50 µL. It should be able to hold 24 wells of 96 well plates. The incubator should be able to maintain a temperature of 37°C. The incubator should be able to maintain a humidity of 95%. The incubator should be able to maintain a CO2 concentration of 5%. The incubator should be able to maintain a pH of 7.4. The incubator should be able to maintain a light intensity of 1000 lux. The incubator should be able to maintain a noise level of 50 dB. The incubator should be able to maintain a vibration level of 0.1 g. The incubator should be able to maintain a shock level of 0.1 g. The incubator should be able to maintain a pressure level of 1 atm. The incubator should be able to maintain a humidity level of 95%. The incubator should be able to maintain a CO2 concentration of 5%. The incubator should be able to maintain a pH of 7.4. The incubator should be able to maintain a light intensity of 1000 lux. The incubator should be able to maintain a noise level of 50 dB. The incubator should be able to maintain a vibration level of 0.1 g. The incubator should be able to maintain a shock level of 0.1 g. The incubator should be able to maintain a pressure level of 1 atm.

Brief Status Update

The team has been working on the design of the incubator. We have completed the initial design and are currently working on the hardware. We have also been working on the software. We have completed the initial software and are currently working on the hardware.

Summary of Weekly Team Meeting Design Accomplishments

- Team completed preliminary research on the project. We are currently working on the hardware and software.
- Team began working on the hardware design. We have completed the initial design and are currently working on the hardware.
- Team began working on the software design. We have completed the initial software and are currently working on the hardware.
- Team completed the initial design and are currently working on the hardware. We have also been working on the software.
- Team completed the initial design and are currently working on the hardware. We have also been working on the software.

[Download](#)

cell_incubator-progress_report-1.docx (11.5 kB)



09/23/2021 Progress Report 2

Katie Day - Dec 08, 2021, 9:22 PM CST

Title: Progress Report

Date: 9/23/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 08, 2021, 9:21 PM CST



[Download](#)

cell_incubator-progress_report-2.docx (11.7 kB)



09/30/2021 Progress Report 3

Katie Day - Dec 08, 2021, 9:22 PM CST

Title: Progress Report

Date: 9/30/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 08, 2021, 9:21 PM CST



[Download](#)

cell_incubator-progress_report-3.docx (11.9 kB)



10/07/2021 Progress Report 4

Katie Day - Dec 08, 2021, 9:22 PM CST

Title: Progress Report

Date: 10/07/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 08, 2021, 9:22 PM CST



[Download](#)

cell_incubator-progress_report-4.docx (11.3 kB)



10/14/2021 Progress Report 5

Katie Day - Dec 08, 2021, 9:22 PM CST

Title: Progress Report

Date: 10/14/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 08, 2021, 9:22 PM CST



[Download](#)

cell_incubator-progress_report-5.docx (11.2 kB)



10/21/2021 Progress Report 6

Katie Day - Dec 08, 2021, 9:22 PM CST

Title: Progress Report

Date: 10/21/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 08, 2021, 9:23 PM CST



[Download](#)

cell_incubator-progress_report-6.docx (11.6 kB)



10/28/2021 Progress Report 7

Katie Day - Dec 09, 2021, 10:52 AM CST

Title: Progress Report

Date: 10/28/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 09, 2021, 10:56 AM CST



[Download](#)

cell_incubator-progress_report-7.docx (11.9 kB)



11/04/2021 Progress Report 8

Katie Day - Dec 09, 2021, 10:52 AM CST

Title: Progress Report

Date: 11/04/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 09, 2021, 10:56 AM CST



[Download](#)

cell_incubator-progress_report-8.docx (12.1 kB)



11/11/2021 Progress Report 9

Katie Day - Dec 09, 2021, 10:53 AM CST

Title: Progress Report

Date: 11/11/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 09, 2021, 10:56 AM CST



[Download](#)

cell_incubator-progress_report-9.docx (12.5 kB)



11/18/2021 Progress Report 10

Katie Day - Dec 09, 2021, 10:54 AM CST

Title: Progress Report

Date: 11/18/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Dec 09, 2021, 10:56 AM CST



[Download](#)

cell_incubator-progress_report-10.docx (12 kB)



12/02/2021 Progress Report 11

Katie Day - Dec 09, 2021, 10:55 AM CST

Title: Progress Report

Date: 12/02/2021

Content by: Katie, Sam, Maya, Caroline, Olivia, and Ethan

Present:

Goals: To document our progress over the course of a week in the semester.

Content:

See attached file.

Conclusions/action items:


See attached file.

Katie Day - Dec 09, 2021, 10:56 AM CST



[Download](#)

cell_incubator-progress_report-11.docx (12.4 kB)



Katie Day - Feb 10, 2022, 9:42 AM CST

Title: PDS

Date: 2/10/2022

Content by: Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, and Bella Raykowski

Present:

Goals: To update our former PDS to better reflect our current project.

Content:

See attached file.

Conclusions/action items:

Begin working on design matrix.

Katie Day - Feb 10, 2022, 9:42 AM CST

Product Design Specifications



Microscope Cell Culture Incubator

ME 461
11 February 2022

Chief Dr. John Puskas
University of Wisconsin-Madison
Department of Mechanical Engineering

Team:
Katie Day
Sam Bardwell
Maya Tanna
Drew Hardwick
Bella Raykowski

[Download](#)

Product_Design_Specifications_Spring_2022.pdf (233 kB)

2/15/22 Design Matrices

SAMUEL BARDWELL - Feb 28, 2022, 12:05 PM CST

Title: Design Matrices


Date: 2/15/22

Content by: Everyone

Goals: To create design matrices for the incubator box and CO2 input in order to pick the best option to continue with for the project.

Content:

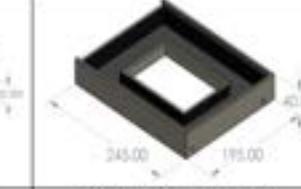Table 1: Design matrix for the incubator box design with highlighted winning portions.

								
			Hinge Top Acrylic Incubator	Slide Top Acrylic Incubator	3D Printed Incubator			
Rank	Criteria	Weight	Score (5 max)	Weighted Score	Score (5 max)	Weighted Score	Score (5 max)	Weighted Score
1	Internal Environment	25	5	25	4	20	4	20
2	Microscope Compatibility	20	5	20	5	20	5	20
3	Accuracy and Reliability	20	4	16	4	16	3	12
4	Ergonomics	15	5	15	5	15	5	15
5	Cost	10	4	8	4	8	3	6
6	Life in Service	5	5	5	5	5	4	4
7	Safety	5	5	5	5	5	5	5
		Sum 100	Sum	94	Sum	89	Sum	82

* All box dimensions are in millimeters

Table 2: Design matrix for the CO2 input with highlighted winning portions.

						
			100% CO2 Tank Controlled Input	5% CO2 Tank Input		
Rank	Criteria	Weight	Score (5 max)	Weighted Score	Score (5 max)	Weighted Score
1	Performance	25	4	20	5	25
2	Cost	25	5	25	1	5
3	Accuracy and Reliability	20	3	12	5	20
4	Independance	15	2	6	4	12
6	Life in Service	10	5	10	5	10
7	Safety	5	5	5	5	5
		Sum 100	Sum	78	Sum	77

Conclusions/action items:

The team will use these design matrices to decide what the best route to take for the incubator box and CO2 input. The winning incubator box design is the hinge top incubator. Prototype fabrication will begin as soon as possible. The winning CO2 input design is the 100% CO2 input. The input sensor and coding will be a little more complicated than the 5% CO2 but the cost is much cheaper.



4/24/22 Final Design SOLIDWORKS Files

SAMUEL BARDWELL - Apr 24, 2022, 12:54 PM CDT

Title: Final Design SOLIDWORKS Files

Date: 4/24/22

Content by: Sam

Goals: To provide SOLIDWORKS files for the incubator box if someone needs to replicate the dimensions.

Content:



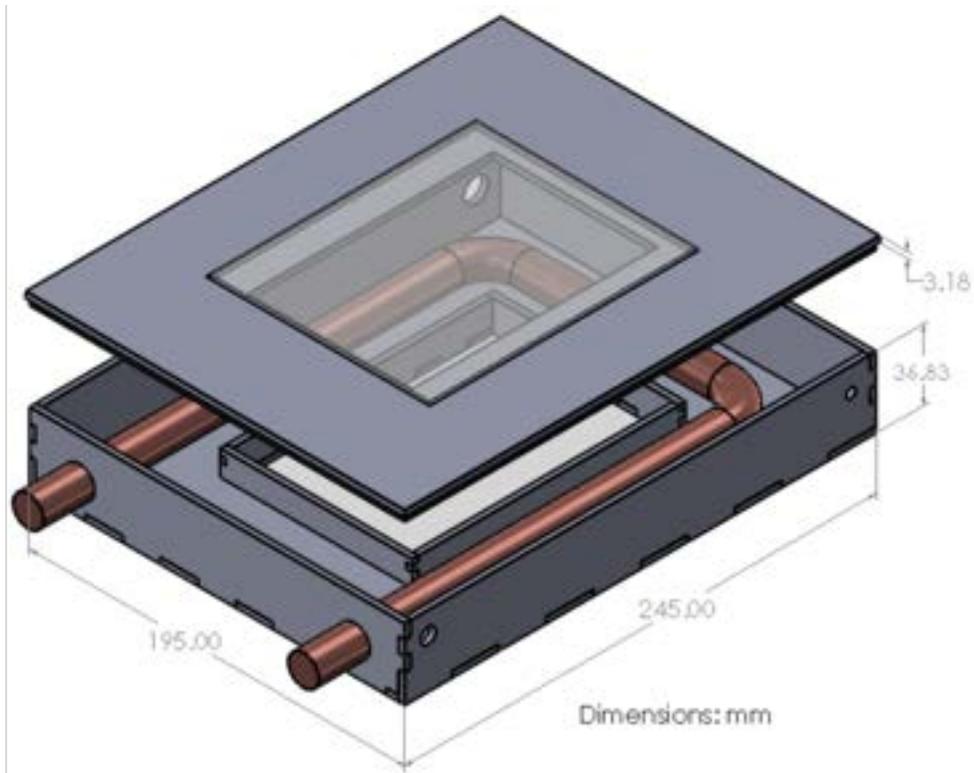


Figure 1: Final SOLIDWORKS drawing of the final design in mm

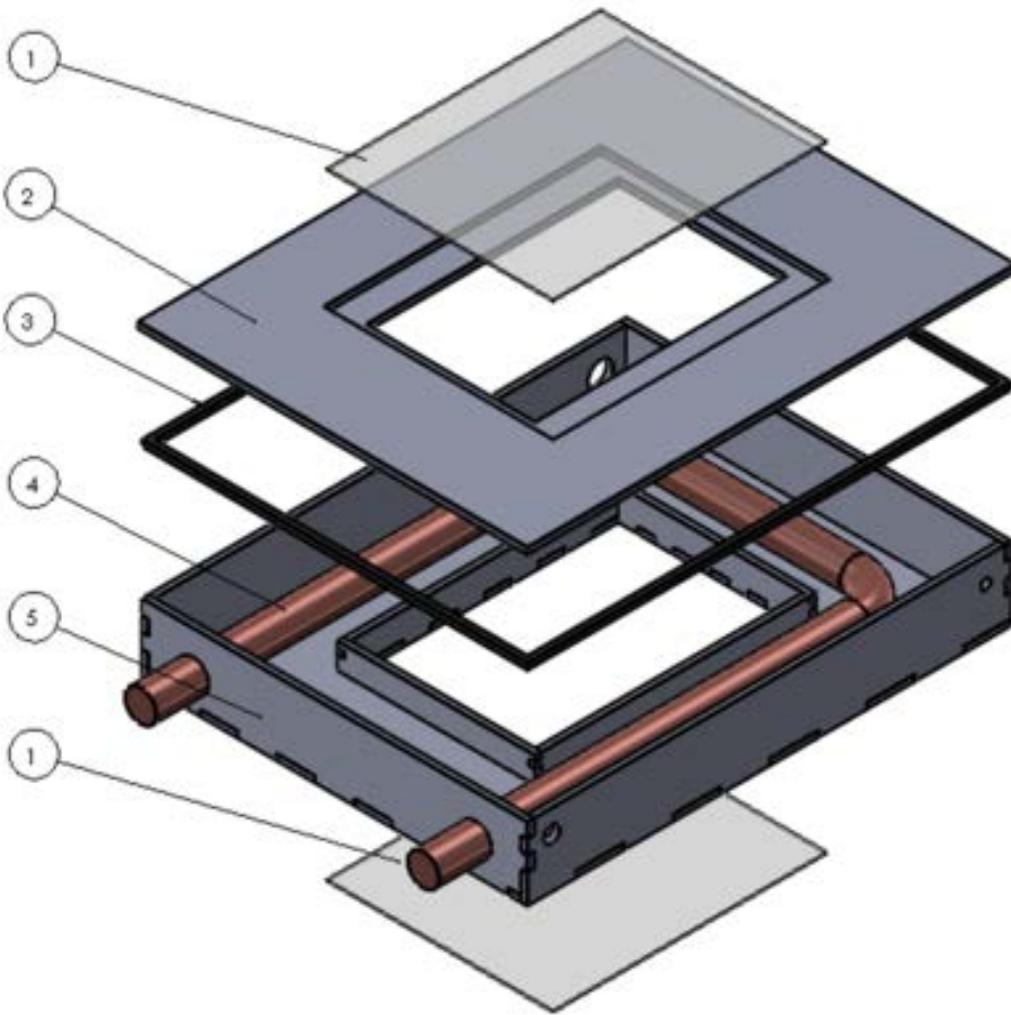

Item No.	Item Description	Dimensions [mm]	QTY.
1	Glass plates to allow transparent viewing	114.5 x 138.5 x 1.3	2
2	Lid of box to enclose the incubator	247 x 197 x 6.35	1
3	Rubber lining to allow light seal	245 x 195 x 3.175	1
4	Copper tubing to provide heat transfer	Outside Diameter: 15.875 Inside Diameter: 12.7 Length: 610	1
5	Black acrylic box to maintain a controlled internal environment	Outside Cut: 245 x 195 x 36.83 Inner Cut: 142 x 100 x 16.25	1

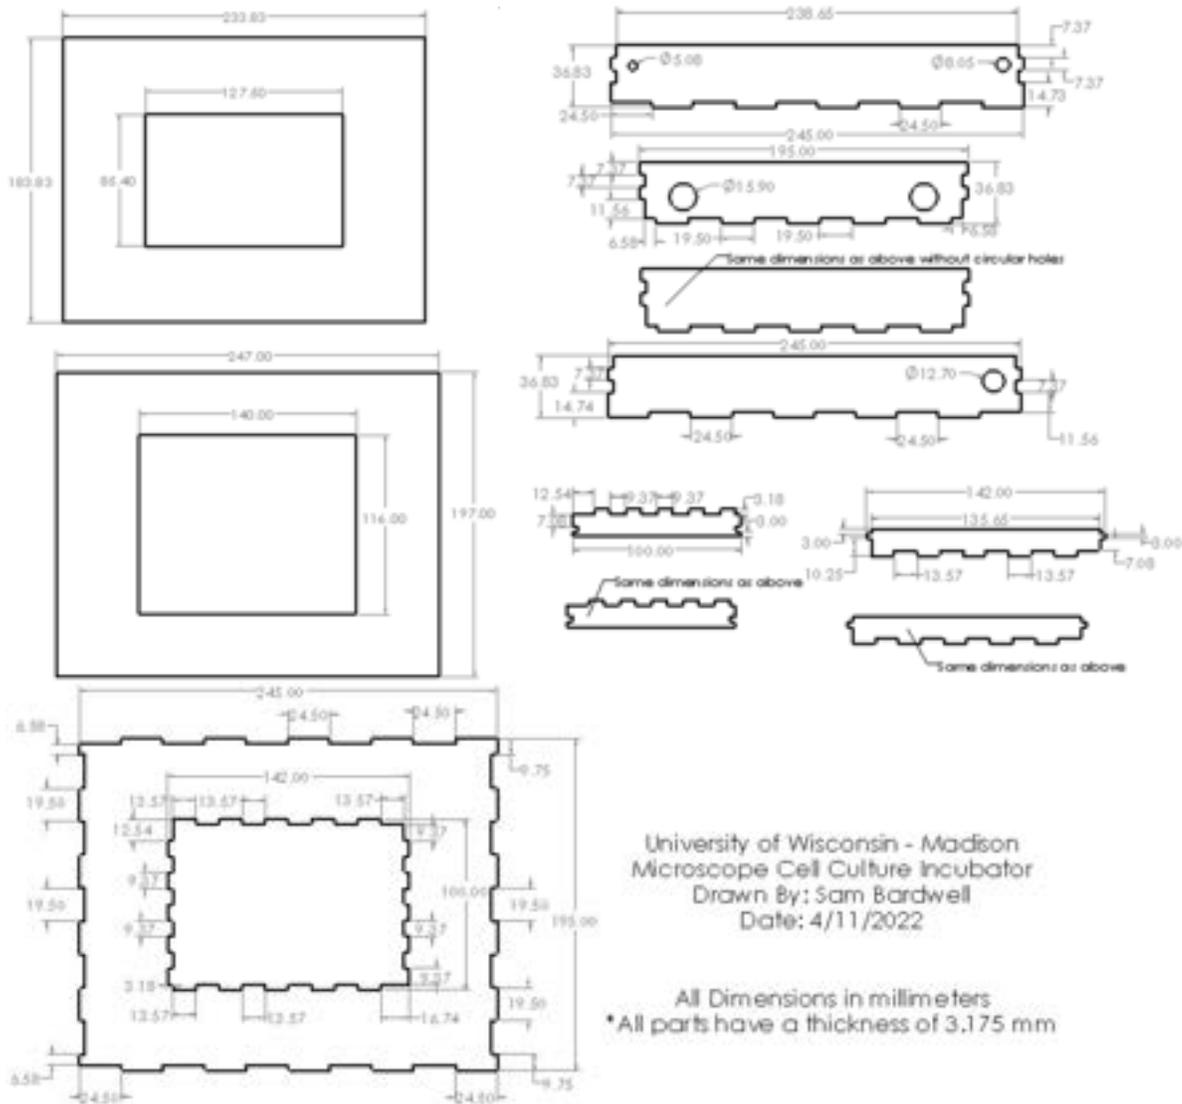Figure 2: Exploded SOLIDWORKS assembly of the final design along with a table explaining the dimensions and parts
SOLIDWORKS DRAWING OF BOX USED FOR LASER CUTTER



University of Wisconsin - Madison
 Microscope Cell Culture Incubator
 Drawn By: Sam Bardwell
 Date: 4/11/2022

All Dimensions in millimeters
 *All parts have a thickness of 3.175 mm

Conclusions/action items:

These drawings and images will be implemented into the final report and poster. These are helpful because if the box needs to be replicated in the future, all of the dimensions we used are here.



4/29/22 Final CO2 Design SOLIDWORKS and testing setup

Drew Hardwick - May 03, 2022, 7:09 PM CDT

Title: Final CO2 Design SOLIDWORKS and testing setup

Date: 4/29/22

Content by: Drew

Present: N/A

Content:

- Below are the SOLIDWORKS files and dimensions used to create the CO2 regulating apparatus. The valve connector is printed to the exact diameter of the valve on the CO2 tank that releases the gas.
- A DC motor will turn this connector and thus turn the valve, opening and closing the CO2 tank and allowing/preventing flow into the incubator based on the incubator's current atmosphere
- The circuitry setup shown below will read the CO2 levels and turn the DC motor to turn the open/close valve accordingly
- This process and the results are elaborated more on in the Final Report

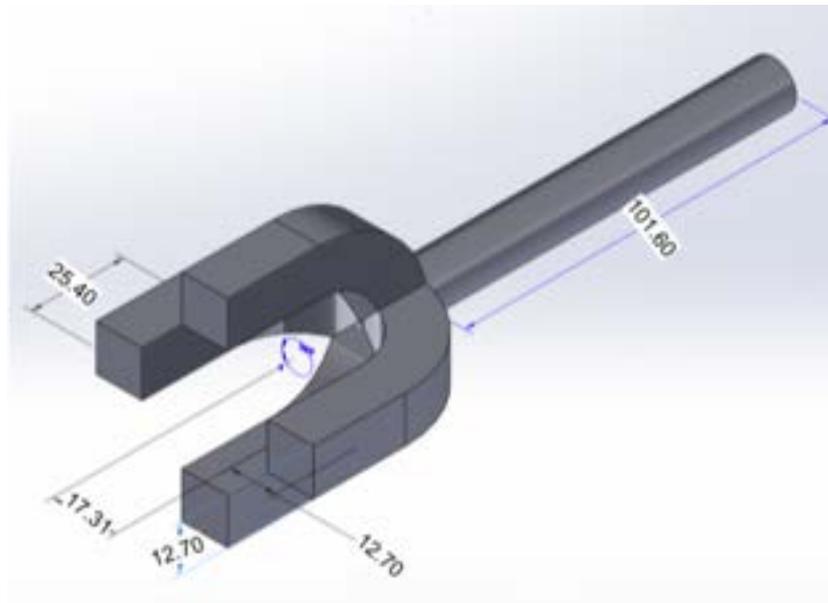


Figure 1: SOLIDWORKS DC Motor Attachment with dimensions shown in mm

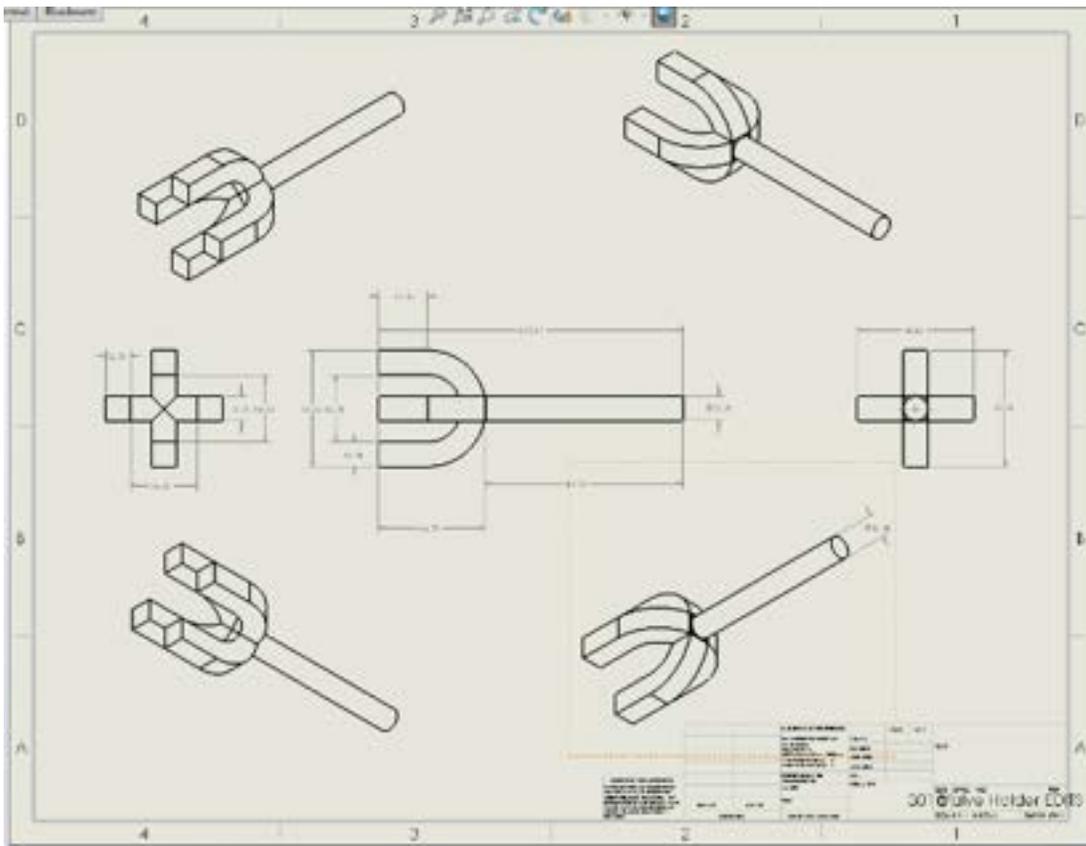


Figure 2: SOLIDWORKS Drawing of DC Motor Attachment with dimensions shown in mm

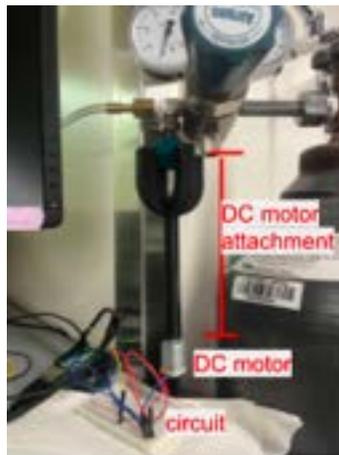


Figure 3: Testing setup with motor, valve holder, and circuits all attached to the CO2 tank

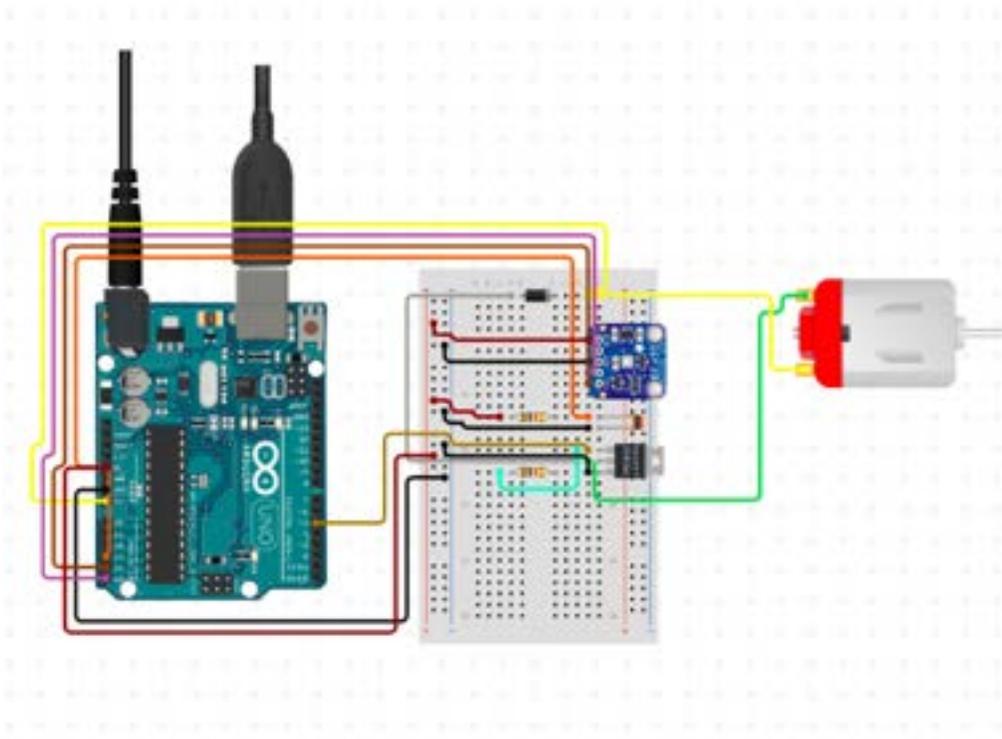


Figure 4: Complete Incubator Circuit Design



3/9/2022 Materials Purchasing Request

Bella Raykowski - Apr 12, 2022, 11:31 AM CDT

Title: Materials Purchasing Request

Date: 3/9/2022

Content by: Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, Bella Raykowski

Goals: Create a comprehensive list of what needs to be purchased for this project as well as all purchasing links for our client

Content:

See attached file.

Conclusions/action items:

See attached file.

Bella Raykowski - Apr 12, 2022, 11:31 AM CDT



[Download](#)

Materials_Purchasing_Request_-_Microscope_Cell_Culture_Incubator_-_Google_Docs.pdf (628 kB)



3/22/2022 UW Makerspace Expenses

Bella Raykowski - Apr 12, 2022, 11:37 AM CDT

Title: Materials Purchasing Request**Date:** 3/22/2022**Content by:** Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, Bella Raykowski**Goals:** Create a comprehensive list of what needs to be purchased for this project as well as all purchasing links for our client**Content:**

Item	Description	Date	QTY	Cost Each	Total	
Hard Wood	36x24x 1/8 Hard wood that was used to fabricate the prototype	3/21/2022	1	\$2.50	1	
Hard Wood	18x24x 1/8 Hard wood that was used to fabricate the prototype	3/21/2022	1	\$1.25	1	

Conclusions/action items:

The team has spent \$3.75 on the wood prototype and now that we have confirmed that the dimensions are correct will move forward with laser cutting the final acrylic prototype.

Black Acrylic	Black Acrylic used to fabricate the incubation chamber 18x24 sheet with 1/2 inch thickness	UW Makerspace	1	4/11/2022	1	\$21.50	\$21.50	Link
Component 8								
Print DC motor attachment	PVA plastic used to fabricate the DC motor attachment for the regulation of CO ₂ input into the incubation chamber	UW Makerspace	1	4/11/2022	1	\$2.72	\$2.72	Link
Component 9								
DC Motor	Actual Motor used for control of CO ₂ regulation	UW Makerspace	1	4/11/2022	1	\$2.00	\$2.00	Link
TOTAL:	\$53.54							

Conclusions/action items:



3/22/22 Laser Cut HDF Prototype

SAMUEL BARDWELL - Mar 22, 2022, 9:23 PM CDT

Title: Laser Cut HDF Prototype

Date: 3/22/22

Content by: Sam and Katie

Goals: To laser cut the HDF board prototype to test the fabrication of the box.

Content:

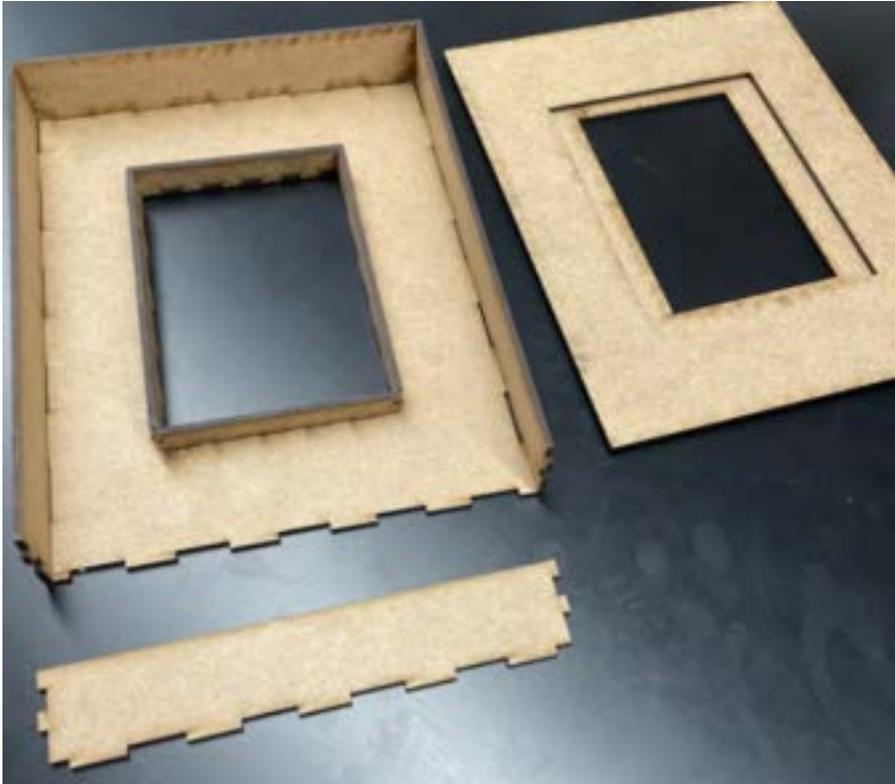


Figure 1: Photo of the laser cut HDF showing the parts being not completely assembled

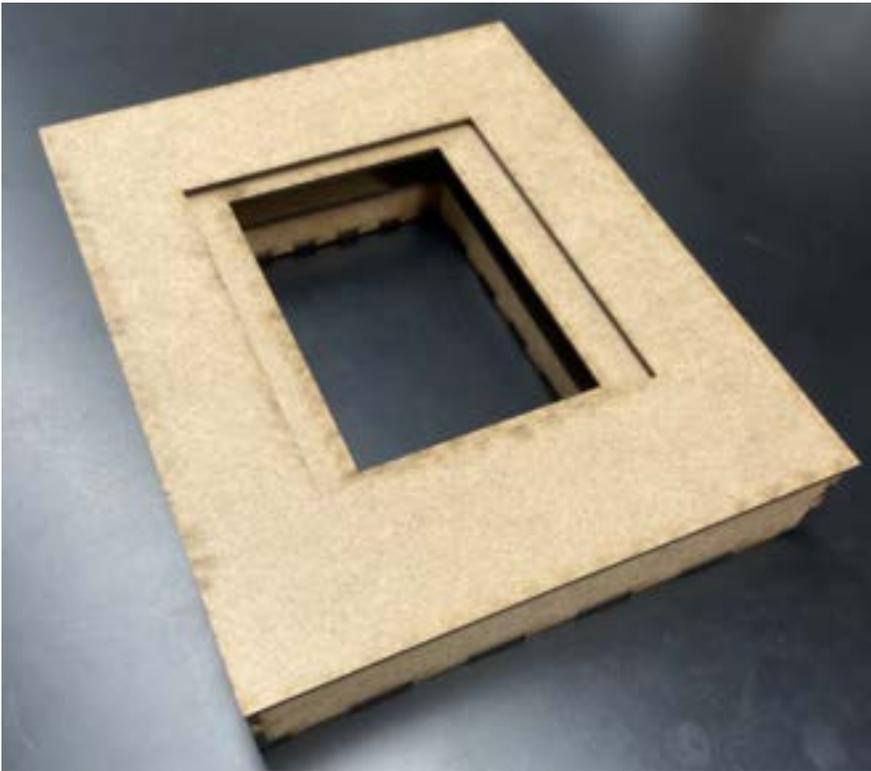


Figure 2: Photo of the laser cut HDF prototype with all the pieces assembled together.

- Box fit very well together
- We were able to figure out the correct setting for the laser cutter and we are ready to laser cut the acrylic sheet when the time comes
- We will have to use hot glue and the acrylic cement in order to seal all the holes of the acrylic when its fabricated. This is because the HDF had a lot of holes and close to perfect but not perfect fits with the fingers.

Conclusions/action items:

Begin preparing files for the acrylic to be laser cut. Begin testing of the incubator with the acrylic box.



3/30/22 Copper Tubing Fabrication

Drew Hardwick - May 03, 2022, 10:45 PM CDT

Title: Copper Tubing Fabrication

Date: 3/30/22

Content by: Sam and Drew

Goals: To fabricate the inner copper tubing ring.

Content:



Figure 1: Inner copper tubing fabrication within the prototyped box.

- Copper was cut to length using the drop saw
- Two copper couplings were used to produce two 90 degree turns to circle the inside of the incubator.
- Copper couplings were fastened to the straight copper pipe with soldering glue
- End of the copper tubing will be connected to 1/2 inch threaded to 3/8th inch barbed wire adaptor.

Conclusions/action items:

Connected the adaptor to the copper tubing and then connect the copper to the heated water pump tubing. Test for any leaks and fix any problems.



4/11/2022 Incubation Chamber Fabrication

Katie Day - Apr 11, 2022, 8:24 PM CDT

Title: Incubation Chamber Fabrication

Date: 4/11/2022

Content by: Katie Day and Sam Bardwell

Present:

Goals: To fabricate, glue, and attach all elements of the incubation chamber.

Content:

See photos. The rubber lining was also added to the top.





Conclusions/action items:

Seal the box using caulk, file a bigger hole for the NDIR sensor, and consider spraying with an adhesive to ensure water tight.



4/19/22 Final Design Fabrication

Katie Day - May 03, 2022, 6:23 PM CDT

Title: Final Design Fabrication

Date: 4/19/22

Content by: Everyone

Goals: To fabricate the final prototype and make sure there are no water leaks.

Content:



Figure 1: Final design fabrication with an open lid.

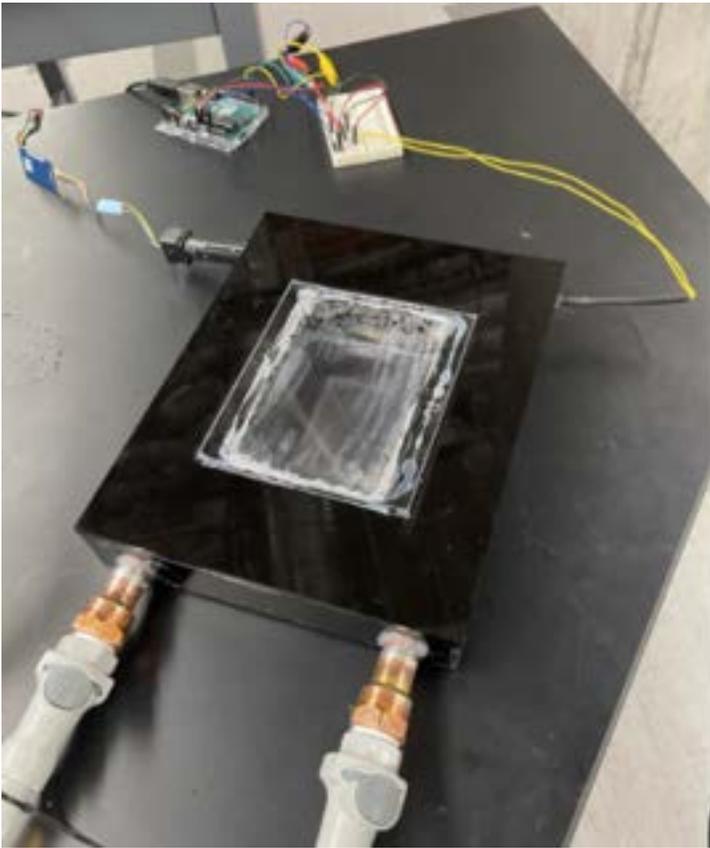


Figure 2: Final design fabrication with an closed lid.

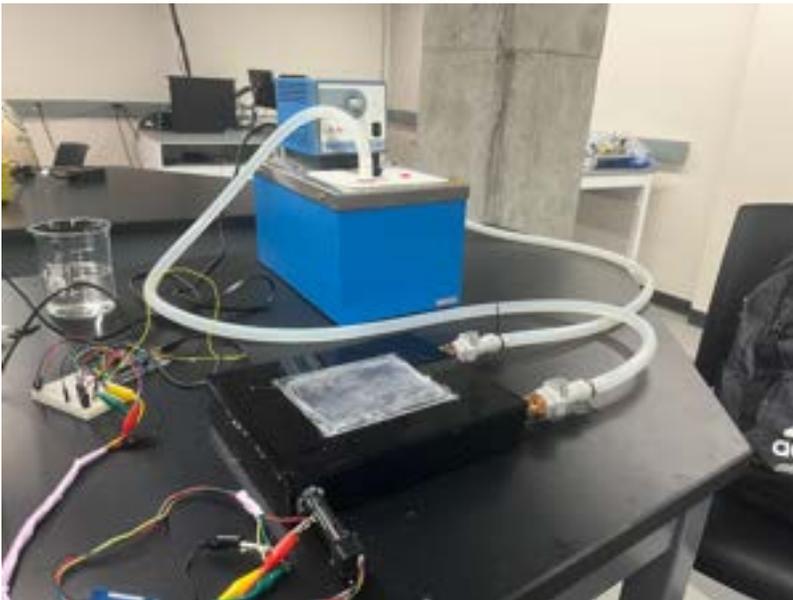


Figure 3: Whole Incubation Set-up

- Copper tubing was soldered to prevent water leakage in the heated water pump contraction.
- Acrylic box was lined with caulk to prevent water leakage within the crevices of the box.
- Adaptors were added to have adjustable tubing options.
- Sensor were hot glued into their appropriate entry holes to prevent internal environment leakage within the design.
- Glass was added from the previous semester design.
- Sensors were connected to the microcontroller and were functioning properly and outputting temperature and humidity values.

- CO2 is still being worked on.

Conclusions/action items:

There was no water leakage after an hour of water being pumped and placed in the water bed. Temperature values were able to reach and maintain 37 degree Celsius. Humidity started at above 95 percent but slowly declined. Possible errors are loose seals within the box. CO2 input is still being worked on.



4/10/2022 Testing Protocols

Katie Day - Apr 10, 2022, 7:12 PM CDT

Title: Testing Protocols

Date: 4/10/2022

Content by: Maya Tanna and Bella Raykowski

Present:

Goals: To document all testing protocols that were created for each element of the project this semester.

Content:

See attached file.

Conclusions/action items:

Use the following testing protocols to ensure accuracy and reliability in the design.

Katie Day - Apr 10, 2022, 7:13 PM CDT



[Download](#)

Testing_Protocols_Template_.pdf (478 kB)



5/3/2022 Testing Protocol Template Revisions

MAYA TANNA - May 03, 2022, 7:38 PM CDT

Title: Testing Protocol Template Revisions

Date: 05/03/2022

Content by: Maya/Bella

Present: Maya

Goals: To document revisions made to the testing protocol template in order to better reflect current information

Content:

See attached file. (Cell Viability Test Protocol was added)

Conclusions/action items: Continue testing wherever possible next semester. Help other areas of the project so they can get to the testing stage and then lead that.

MAYA TANNA - May 03, 2022, 7:39 PM CDT



[Download](#)

Testing_Protocols_Template_2_.pdf (95.7 kB)



3/24/2022 Optical Testing

Katie Day - Apr 10, 2022, 7:14 PM CDT

Title: Optical Testing

Date: 3/24/2022

Content by: Maya Tanna and Bella Raykowski

Present:

Goals: To conduct optical testing to determine the usability of the glass.

Content:

See attached file.

Conclusions/action items:

The glass is not statistically significant and passes all tests.

Katie Day - Apr 10, 2022, 7:14 PM CDT

Optical Testing - Prior to and After Installation

Introduction
 Name of Tester: Maya Tanna & Bella Raykowski
 Date of Test/Experimentation: 03/24/2022
 Site of Test/Experimentation: ESB 1002

Objectives
 The estimated High Transparency Linear Polarization check is determine which test method has a lower percentage of red color. Red Paper has a color percentage of 75%, a blue percentage of 11, and a transparency percentage of 93.48 (93). The team has researched for the transparency percentage of participants as 85-90 and the team is 100%. The team will determine through optical testing, which by transparent the glasses in light. We will measure transparency in the object's red color, whether 90%, transparency is acceptable.

Step	Protocol	Verification/Validation	Pass/Fail	is this of Tester
1	Participant completes steps 1-2. Provide the instructions for use. Place readable test paper between the subjects of High Transparency Linear Polarization and place under the microscope step.	<input checked="" type="checkbox"/> Passed Comments:	Pass	97.5%
2	Adjust the optical components of the microscope to test clarity based on participant alignment. Remove the test document paper & centered under the microscope lens. Take a picture of which color test under the microscope.	<input checked="" type="checkbox"/> Passed Comments:	Pass	97.5%
3	Repeat steps 1-2 without the participant present. Record the data for the red color.	<input checked="" type="checkbox"/> Passed Comments:	Pass	97.5%
4	Have 3 participants, after they complete step 1-2, complete the test. The team recorded all test the test results consistency of 1-10. Measure the test results. The image will be higher than quality and the test is determined. Record the image in the comments.	<input checked="" type="checkbox"/> Passed Comments: Participants indicated that the image without the paper is not clear and had a higher transparency.	Pass	97.5%

[Download](#)

Maya_Bella_Optical_Testing.pdf (63.8 kB)



3/30/22 Flow Rate Experiment

SAMUEL BARDWELL - Mar 30, 2022, 7:14 PM CDT

Title: Flow Rate Experiment

Date: 3/30/22

Content by: Sam and Katie

Goals: To calculate the flow rate of 100% CO2 coming out of the CO2 tank at 14.7 psi.

Content:

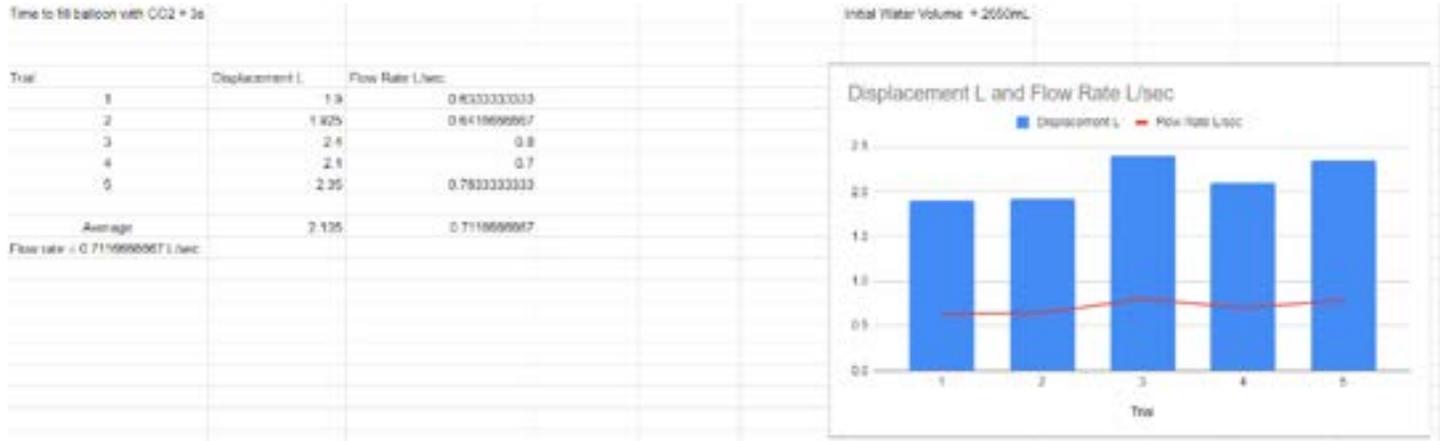


Figure 1: Photo of the flow rate data and graph showing the average flow rate at 14.7 psi.

- Katie and I filled up a balloon for three seconds with 14.7 psi CO2 from the CO2 tank
- When then placed the balloon in a known amount of water and measured the displacement to find the volume of CO2 that was outputted
- Using the output in Liters and the known time in seconds, we were able to estimate the flow rate to be 0.7116 L/s

Conclusions/action items:

This estimated flow rate will be used for the CO2 input mechanism and within the Arduino coding to determine how long the DC motor should be opened and the closed for in order to keep the internal environment at 5% CO2.



4/5/2022 Humidity Testing

Katie Day - Apr 10, 2022, 7:10 PM CDT

Title: Humidity Testing

Date: 4/5/2022

Content by: Katie Day

Present:

Goals: To test the accuracy of the humidity formula against the DHT22 humidity sensor.

Content:

The DHT22 and Thermistor both measured the humidity in ECB 1002 at ambient temperatures for 5 minutes. The resulting values and means were then compared via a t-Test.

See attached files.

Conclusions/action items:

There is no statistical significance between the DHT22 and Thermistor.

Katie Day - Apr 10, 2022, 7:10 PM CDT



[Download](#)

Misty_final_data.csv (1.75 kB)

Katie Day - Apr 10, 2022, 7:10 PM CDT



[Download](#)

Humidity_Test.csv (380 B)

4/5/2022 Temperature Testing (along with incubator Humidity Testing)

Katie Day - Apr 10, 2022, 7:10 PM CDT

Title: Temperature Testing

Date: 4/5/2022

Content by: Katie Day

Present:

Goals: To complete the testing protocols in order to determine the accuracy of the thermistor against the incubator in the teaching lab.

Content:

See attached files.

Conclusions/action items:

There is no statistical significance between the thermistor and the incubator readings.

Katie Day - Apr 10, 2022, 7:10 PM CDT

Internal Environment - Temperature and Humidity Sensor Test Protocol

Introduction
 Name of User: Katie Day
 Name of Test Performance: 4/5/2022
 Size of Test Performance: ECE 1102

Explanation
 The goal will be employing a sensor inside the incubator in order to measure the internal temperature. The measurements of the humidity and temperature will be obtained by an ADR9400-100 4-wire digital sensor. The user will test to make sure that the code and the ADR9400 are working correctly by obtaining the sensor and then confirming its accuracy in steady state and precision in a dynamic range using a thermistor. To calibrate the sensor, the user will use resistance values of the Analog-to-Digital Converter (ADC) to calibrate its accuracy off the scale by first measuring the temperature and humidity of the working environment to gauge if they are both working as expected, and then measuring its temperature at various high and low temperatures. Afterwards, the user will measure the temperature inside the incubator with a thermistor and the sensor. To keep the incubator completely sealed, the thermistor probe and humidity probe will be inserted into the incubator and held through the glass. The user will be consistent in recording if the sensor values within 1% of the thermistor temperature.

Step	Protocol	Verification/Validation	Pass/Fail	Initial or Final
1	Calibrate the sensor using resistance values of Analog-to-Digital Converter	• Verified Comments:	Pass	ISE
2	Test the precision of the ADR9400-100 4-wire digital sensor by measuring the temperature and humidity of the working environment. Place the sensor in the liquid for 10 minutes and measure the temperature inside the incubator. Then place the sensor in the freezer and measure the temperature inside the incubator. Measure the digital value under these conditions. The sensor follows these trends. It is verified.	• Verified Comments:	Pass	ISE
3	Set up the incubator to control and set up a digital thermistor within the system.	• Verified Comments:		

[Download](#)

Katie_Temperature_Humidity_Testing.pdf (93.2 kB)

Katie Day - Apr 10, 2022, 7:10 PM CDT



[Download](#)

Temp_final_data.csv (673 B)



[Download](#)

Temp_final_data.csv (673 B)



4/21/2022 Whole Incubator Temperature and Humidity Testing

Katie Day - Apr 21, 2022, 12:38 PM CDT

Title: Incubator Temperature and Humidity Testing

Date: 4/21/2022

Content by: Katie Day, Maya Tanna, Bella Raykowski, Drew Hardwick, and Sam Bardwell

Present:

Goals: To test the internal environment of the incubator in regards to temperature and humidity.

Content:

- Temperature had an average temperature of 37.6°C, the dip in the graph represents turning the heated water pump down from it's warm up temperature of 40°C to slightly below 34°C.
- Humidity testing was successful on the second try, after the formula was re-calibrated in the Arduino code. The results showed an average of 97.1% over the tested time interval.

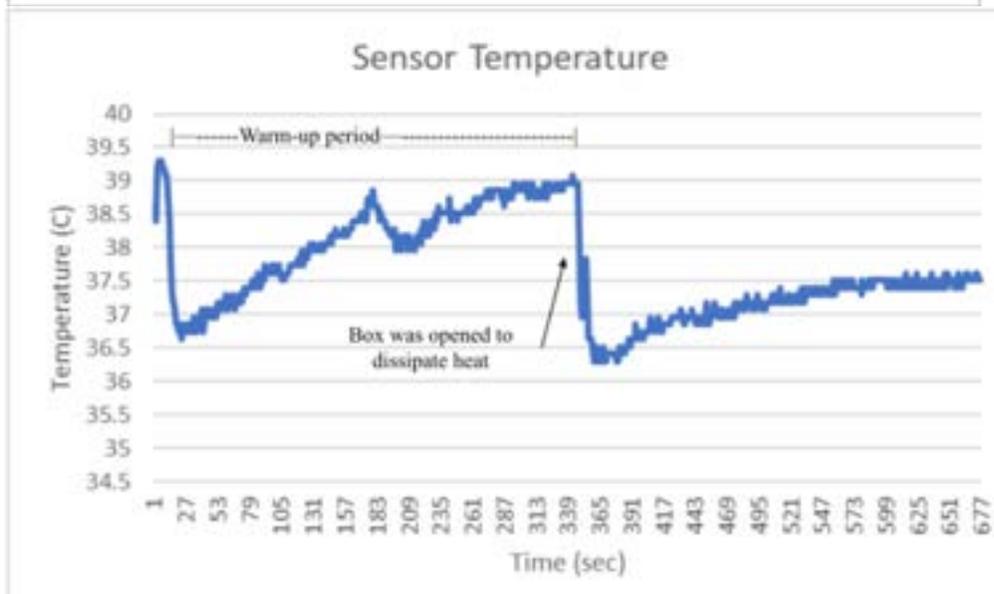
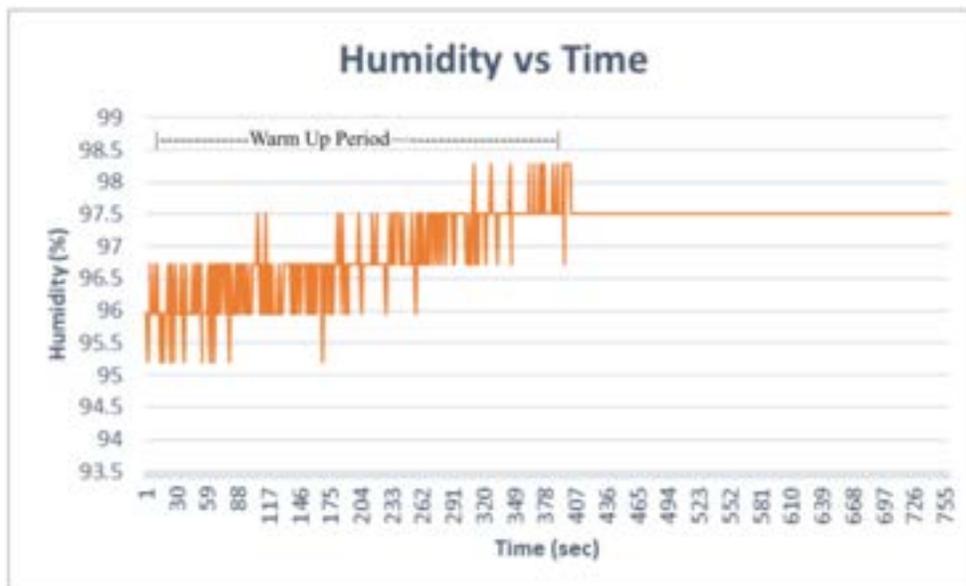


Figure 1: Sensor Humidity Results
Sensor Temperature Results


Figure 2:

See attached for raw data

Conclusions/action items:

Complete recovery testing.

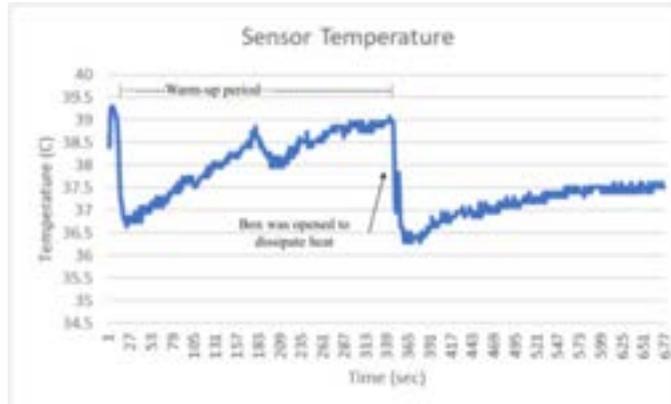Katie Day - Apr 21, 2022, 12:37 PM CDT



[Download](#)

Sensor_temp_graph.png (74.9 kB)

Katie Day - Apr 21, 2022, 12:37 PM CDT



[Download](#)

Sensor_hum_graph.png (84.9 kB)

Katie Day - Apr 21, 2022, 12:37 PM CDT



[Download](#)

Incubator_temp_testing.csv (20.1 kB)

Katie Day - Apr 21, 2022, 12:37 PM CDT



[Download](#)

hum_final_data.xls (60.4 kB)

Katie Day - Apr 21, 2022, 12:37 PM CDT



[Download](#)

hum_final_data.csv (4.86 kB)



4/21/2022 Completed Arduino Code

Katie Day - Apr 21, 2022, 12:42 PM CDT

Title: Completed Arduino Code

Date: 4/21/2022

Content by: Katie Day

Present:

Goals: To put all of the separate electronic elements onto one circuit and use one code to display all necessary values and perform all necessary functions.

Content:

See attached file.

```
//Combined Arduino Code for Temp, Hum, and CO2

//Concentration
#include <SoftwareSerial.h>
#include <NDIR_SoftwareSerial.h>

//Select 2 digital pins as SoftwareSerial's Rx and Tx. For example, Rx=2 Tx=3
NDIR_SoftwareSerial mySensor(2, 3);
double percent = mySensor.ppm/10000;

// temperature variables
int ThermistorPin = 0;
int Vo;
float R1 = 10000;
float logR2, R2, T, Tc, Tf;
float c1 = 1.009249522e-03, c2 = 2.378405444e-04, c3 = 2.019202697e-07;
float e_s;
float e_d;
float Td = 36.1;

//DC motor variables
const int pwm = 4;
const int in_1 = 8;
const int in_2 = 9 ;
//For providing logic to L298 IC to choose the direction of the DC motor

void setup()
{
  Serial.begin(9600);

  if (mySensor.begin()) {
    Serial.println("Wait 10 seconds for sensor initialization...");
    delay(10000);
  } else {
    Serial.println("ERROR: Failed to connect to the sensor.");
    while(1);
  }
  pinMode(pwm,OUTPUT) ; //we have to set PWM pin as output
  pinMode(in_1,OUTPUT) ; //Logic pins are also set as output
  pinMode(in_2,OUTPUT) ;
}

void loop() {
// Temperature
Vo = analogRead(ThermistorPin);
```

```

R2 = R1 * (1023.0 / (float)Vo - 1.0);
logR2 = log(R2);
T = (1.0 / (c1 + c2*logR2 + c3*logR2*logR2*logR2));
Tc = T - 271.15;
Tf = (Tc * 9.0) / 5.0 + 32.0;
float hum =0;
e_s = 6.11 * pow(10, ((7.5 * Tc)/(237.7 + Tc)));
e_d = 6.11 * pow(10, ((7.5 * Td)/(237.7 + Td)));
hum =exp((17.625*5.2)/(243.04+5.2))/exp((17.625*Tc)/(243.04+Tc)); //rel humidity

```

```

Serial.print("Temperature: ");
Serial.print(Tf);
Serial.print(" F; ");
Serial.print(Tc);
Serial.println(" C");
Serial.print("Relative Humidity: ");
Serial.print((hum*1000)-30);
Serial.println("%");
delay(1000);

```

```
//Concentration
```

```

if (mySensor.measure()) {
  Serial.print("CO2 Concentration is ");
  Serial.print(mySensor.ppm);
  Serial.println(" ppm");
  Serial.print("CO2 Percentage is ");
  Serial.print((mySensor.ppm/10000));
  Serial.println("%");
} else {
  Serial.println("Sensor communication error.");
}
delay(1000);

```

```
//DC Motor
```

```

if (mySensor.ppm < 60000){
  //For Clock wise motion , in_1 = High , in_2 = Low
  digitalWrite(in_1,HIGH) ;
  digitalWrite(in_2,LOW) ;
  analogWrite(pwm,255) ;
  /* setting pwm of the motor to 255 we can change the speed of rotation
  by changing pwm input but we are only using arduino so we are using highest
  value to driver the motor */
}
if (mySensor.ppm > 60000){
  //For Anti Clock-wise motion - IN_1 = LOW , IN_2 = HIGH
  digitalWrite(in_1,LOW) ;
  digitalWrite(in_2,HIGH) ;
}else{
  //For brake
  digitalWrite(in_1,HIGH) ;
  digitalWrite(in_2,HIGH) ;
}
}

```

Conclusions/action items:



[Download](#)

Coding_Spring_22.ino (2.81 kB)



4/26/2022 Recovery Testing

Katie Day - Apr 26, 2022, 9:01 PM CDT

Title: Recovery Testing

Date: 4/26/2022

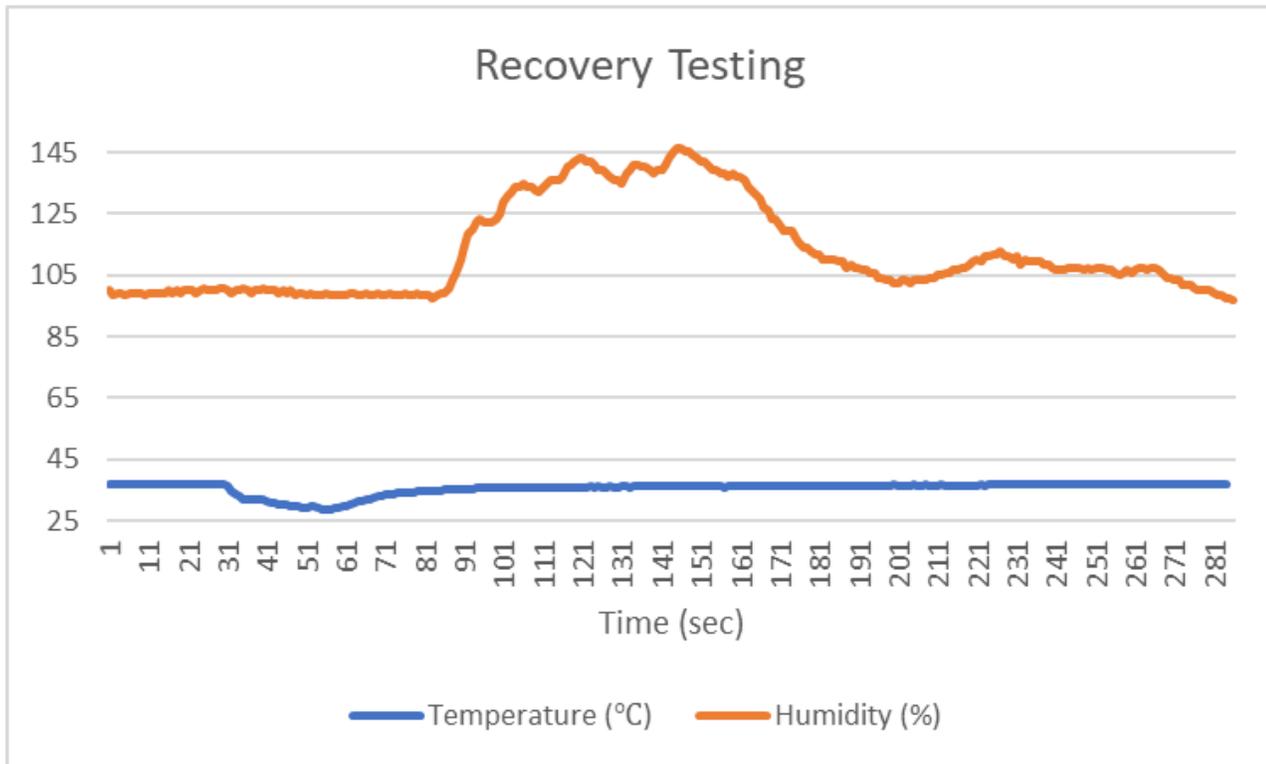
Content by: Katie Day, Maya Tanna, and Bella Raykowski

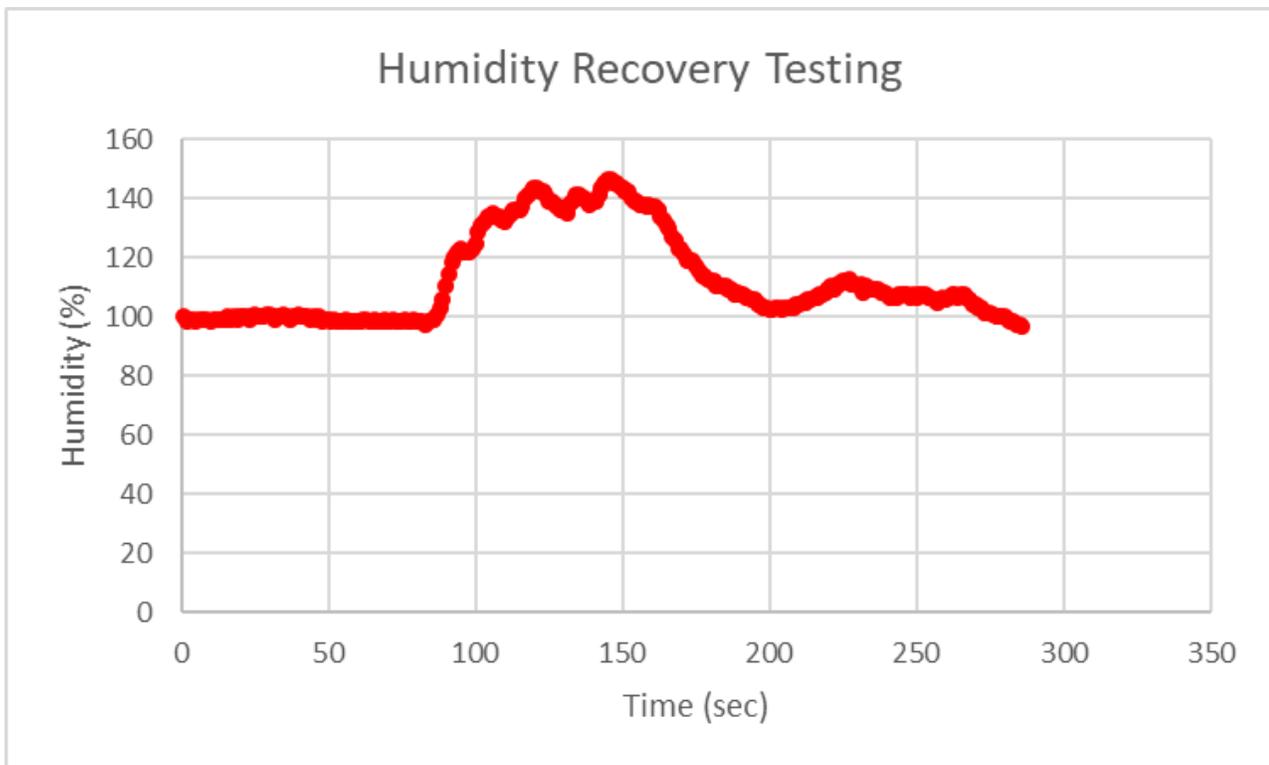
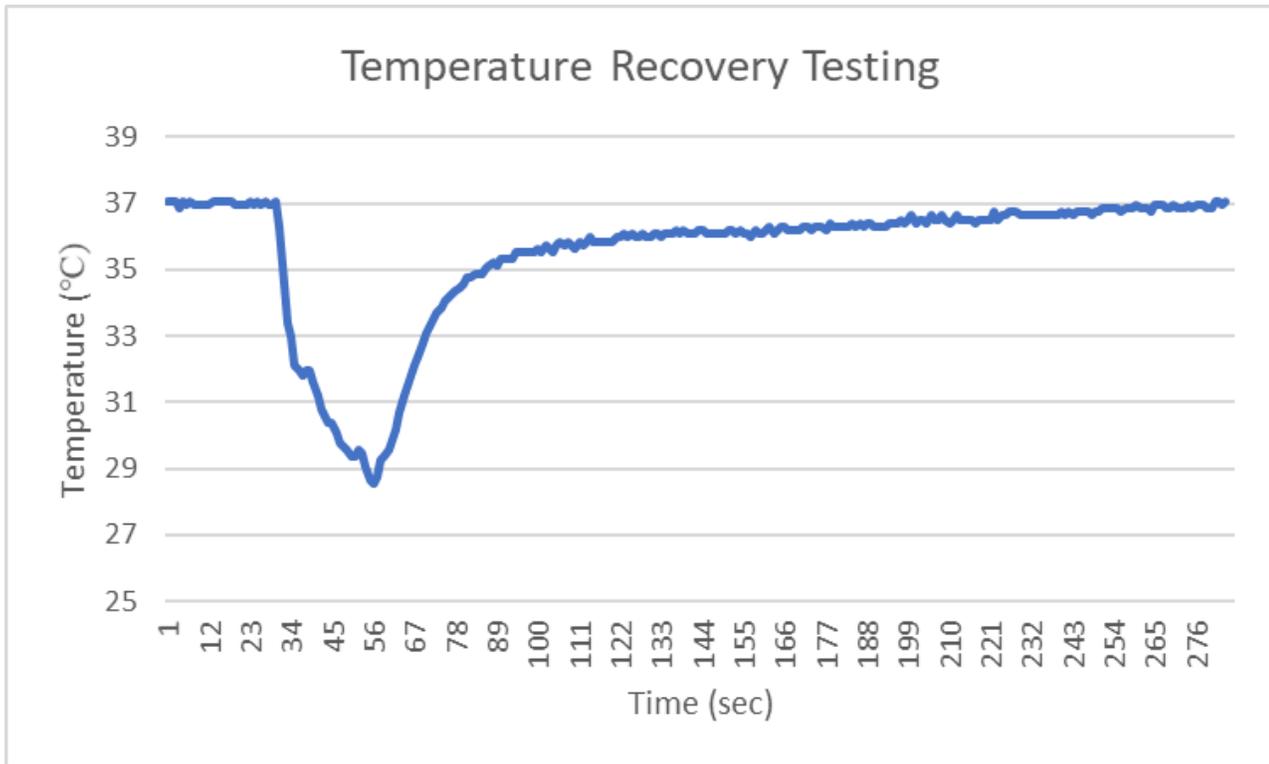
Present: Whole Group

Goals: To determine the amount of time it takes the incubator to return to standard temperature and humidity after opening the box for a short amount of time.

Content:

See attached files.





Conclusions/action items:

The box meets the requirements outlined in the PDS, with an average recovery time of 3:30 per 30 seconds of disruption.

Recovery Test Protocol Test 1


Introduction:
 Name of Tester: Maya & Katie
 Date of Test/Experimentation: 04/26/2022
 Site of Test/Experimentation: ECE 1002

Objectives:
 The goal was to test the recovery time of the incubator after it has been opened by turning heating it back on to see how long it takes to perform under normal conditions (25°C, 50% RH, and 100% humidity). The maximum recovery time should not exceed 30 minutes after a 30 second setback in the outdoor environment.

Steps	Procedures	Equipment/Instrumentation	Pass/Fail	Tester Initials
1	Turn up the incubator for normal use. Record environmental conditions in the commercial unit that they generate the correct ranges (25°C, 50%RH, and 100% humidity).	1) Incubator Comments: 27.0°C, 50.2%RH	Pass	KCD/MT
2	Close the incubator for 30 seconds. Manually check, verify that the incubator is working.	1) Incubator Comments:	Pass	KCD/MT
3	Record environmental conditions in the laboratory at a rate of 10 seconds after opening the incubator. Verify that the external conditions are different from the normal conditions recorded above.	1) Incubator Comments: 27.1°C, 50%RH	Pass	KCD/MT
4	Close the incubator. Verify that the incubator has not exceeded 30 minutes after a 30 second setback in the outdoor environment. Record the time it took to return back to normal conditions in the comments.	1) Incubator Comments: It took a little over 30 mins to recover from the temperature and humidity.	Pass	KCD/MT


[Download](#)

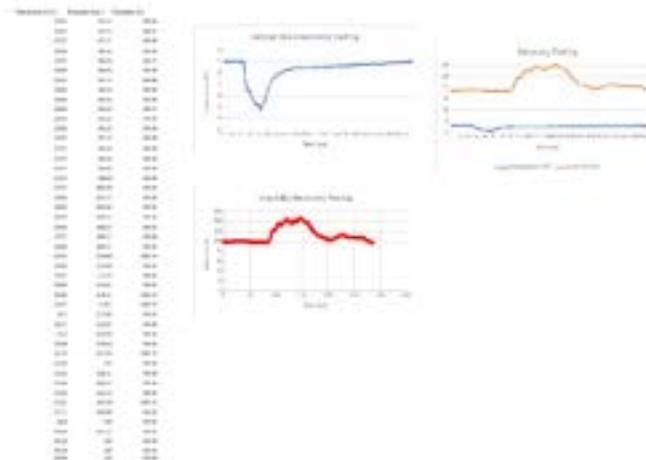Maya_Katie_Bella_Recovery_Testing.pdf (66.7 kB)



[Download](#)

Recovery_Data.xlsx (34.8 kB)



Bella Raykowski - May 03, 2022, 10:01 PM CDT

Title: Product Design Specifications

Date: 2/25/22

Content by: Everyone

Present: Everyone

Goals: To present to our client and advisor the product design specifications of the microscopic cell culture incubator project.

Content:

Slides are attached

Conclusions/action items:

Now that we have the constraints and direction of our project laid out we can begin fabricating

Bella Raykowski - May 03, 2022, 10:01 PM CDT

Product Design Specifications



Microscope Cell Culture Incubator

ENR 303
11 February 2022

Client: Dr. John Puccelli
University of Wisconsin-Madison
Department of Mechanical Engineering

Team:
Bella Raykowski
Ryan Redford
Mason Tavares
Drew Raykowski
Bella Raykowski

[Download](#)

Product_Design_Specifications_Spring_2022_- Google_Docs.pdf (237 kB)



2/25/22 Preliminary Presentation Slides

SAMUEL BARDWELL - Feb 28, 2022, 12:02 PM CST

Title: Preliminary Presentation Slides

Date: 2/25/22

Content by: Everyone

Present: Everyone

Goals: To present to our client, advisor, and BME peers our preliminary understandings of the microscopic cell culture incubator project.

Content:

Slides are attached

Conclusions/action items:

We will use our preliminary presentation to lead us in a good direction this semester. This is only preliminary information and everything can be fluid.

SAMUEL BARDWELL - Feb 28, 2022, 12:03 PM CST



[Download](#)

Prelim_Presentation_Slides_Spring_2022.pdf (1.87 MB)



3/1/22 Preliminary Report

MAYA TANNA - Mar 01, 2022, 6:29 PM CST

Title: Preliminary Report

Date: 3/1/22

Content by: Everyone

Present: Everyone

Goals: To document our preliminary report with our preliminary understandings of the microscopic cell culture incubator project.

Content:

See attached file.

Conclusions/action items:

We will use our preliminary presentation to lead us in a good direction this semester, and make revisions as necessary in order to meet the needs of our client.

MAYA TANNA - Mar 01, 2022, 6:29 PM CST

Microscopic Cell Culture Incubator
Preliminary Report



WISCONSIN
MADISON 2022

Chair: Dr. John Parvizli
University of Wisconsin-Madison
Department of Biomedical Engineering

Advisor: Dr. Matthew Everett
University of Wisconsin-Madison
Department of Biomedical Engineering

Team:
Liam, Jon, Andrew,
Constance, Kati, Der,
Bryan, Alex, Sam,
Bryan, Bella, Katherine,
Bella, Chase, Deborah

[Download](#)

Prelim_Report_Spring_2022.pdf (3.01 MB)



4/26/2022 Final Poster

Katie Day - Apr 26, 2022, 9:03 PM CDT

Title: Final Poster

Date: 4/26/2022

Content by: Katie Day, Maya Tanna, Sam Bardwell, Bella Raykowski, and Drew Hardwick

Present:

Goals: To present the entirety of our semesters work into one final poster.

Content:

See attached file.

Conclusions/action items:

Continue the project next semester focusing on CO2 input, live cell imaging, and a professional interior and exterior.

Katie Day - Apr 26, 2022, 9:03 PM CDT



[Download](#)

Final_Poster.pdf (3.47 MB)



5/3/22 Final Report

SAMUEL BARDWELL - May 03, 2022, 7:34 PM CDT

Title: Final Report

Date: 5/3/22

Content by: Everyone

Goals: To write a report about the semester's project.

Content:

* See attached file

Conclusions/action items:

Continue the project next semester focusing on CO2 input, live cell imaging, and having a professional interior and exterior design.

SAMUEL BARDWELL - May 03, 2022, 7:36 PM CDT

Microscopic Cell Culture Incubator
Final Report



WISCONSIN
MAY 03 2022

Class: Dr. John Parvizli
University of Wisconsin-Madison
Department of Mechanical Engineering

Advisor: Dr. Melissa Evers
University of Wisconsin-Madison
Department of Mechanical Engineering

Team:
Liam: Sam Bardwell
Cristian: Eric Kuch Der
Bryan: Ryan Tamm
Bryan: Boris Puchner
Bryan: Steve Hoshorn

[Download](#)

Final_Report_Spring_2022.pdf (11.9 MB)



2/3/2022 Progress Report 1

Katie Day - Feb 10, 2022, 9:44 AM CST

Title: Progress Report 1

Date: 2/3/2022

Content by: Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, Bella Raykowski

Present:

Goals: To inform our advisor and our client of our weekly activities and progress on the project.

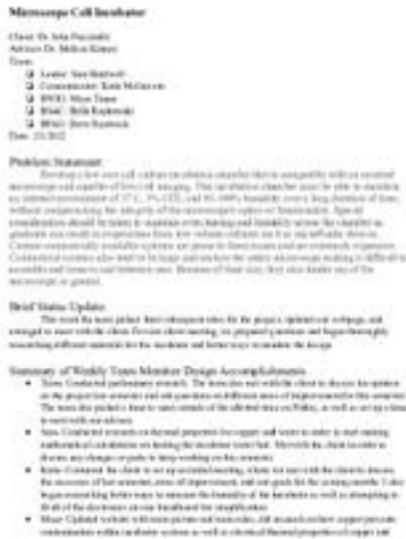
Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Feb 10, 2022, 9:45 AM CST



[Download](#)

cell_incubator-progress_report_1.pdf (78.6 kB)



2/10/2022 Progress Report 2

Katie Day - Feb 10, 2022, 9:45 AM CST

Title: Progress Report 2

Date: 2/10/2022

Content by: Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, Bella Raykowski

Present:

Goals: To inform our advisor and our client of our weekly activities and progress on the project.

Content:

See attached file.

Conclusions/action items:

See attached file.

Katie Day - Feb 10, 2022, 9:45 AM CST



[Download](#)

cell_incubator-progress_report_2.pdf (79 kB)



2/17/2022 Progress Report 3

SAMUEL BARDWELL - Feb 28, 2022, 12:07 PM CST

Title: Progress Report 3

Date: 2/17/2022

Content by: Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, Bella Raykowski

Goals: To inform our advisor and our client of our weekly activities and progress on the project.

Content:

See attached file.

Conclusions/action items:

See attached file.

SAMUEL BARDWELL - Feb 28, 2022, 12:07 PM CST



[Download](#)

cell_incubator-progress_report_3.pdf (1.14 MB)



2/24/2022 Progress Report 4

SAMUEL BARDWELL - Feb 28, 2022, 12:08 PM CST

Title: Progress Report 4

Date: 2/24/2022

Content by: Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, Bella Raykowski

Goals: To inform our advisor and our client of our weekly activities and progress on the project.

Content:

See attached file.

Conclusions/action items:

See attached file.

SAMUEL BARDWELL - Feb 28, 2022, 12:08 PM CST



[Download](#)

cell_incubator-progress_report_4.pdf (78.4 kB)



3/3/2022 Progress Report 5

Bella Raykowski - Apr 12, 2022, 11:24 AM CDT

Title: Progress Report 5

Date: 3/3/2022

Content by: Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, Bella Raykowski

Goals: To inform our advisor and our client of our weekly activities and progress on the project.

Content:

See attached file.

Conclusions/action items:

See attached file.

Bella Raykowski - Apr 12, 2022, 11:24 AM CDT

Message Call Indicator

From: Dr. Jay Pascoe

Address: Dr. Jay Pascoe

To:

- ↳ Katie Day
- ↳ Sam Bardwell
- ↳ Maya Tanna
- ↳ Drew Hardwick
- ↳ Bella Raykowski

Date: 3/3/22

Project Statement

Develop a low cost cell culture incubator capable that is compatible with a normal microscope and capable of level 1 bio safety. The incubator should use the AM to develop an internal environment of 37 C, 95% CO₂ and 90% RH, humidity over a long duration of time, without compromising the integrity of the microscope optics or functionality. Special consideration should be taken to maintain even heating and humidity across the chamber as growth is used to experiment that are culture sensitive to any well plate device. Current commercially available systems are prone to these issues and are extremely expensive. Commercial systems also tend to be large and use the entire laboratory making it difficult to maintain and change out between uses. Because of these risks, they also hinder use of the microscope in general.

Key Status Update

The team will complete preliminary calculations and start discussing the next steps for the project.

Summary of Weekly Team Member Design Accomplishments

- Katie: The team worked on the preliminary calculations, including the report, presentation, and finishing the spreadsheet for generation.
- Sam: Contributed to the preliminary report by talking about the three preliminary design goals as well as the general laboratory context. Started a SOLIDWORKS drawing to be able to build a custom prototype of the incubator. began finding materials needed to be ordered.
- Maya: Completed the preliminary report, added the preliminary report, and started on the design of the incubator. Started on the design of the incubator and testing of the incubator.
- Drew: Worked on the design of the incubator, report, financial and spreadsheet, generated a video of the incubator. Updated preliminary report to include all content.
- Bella: Designed and simulated preliminary report and worked. Research possible color options for CO₂ input and began compiling parts for incubator.
- Bella: Presented the preliminary presentation to the client and advisor. Started the preliminary report and updated the spreadsheet.

[Download](#)

cell_incubator-progress_report_5_-_Google_Docs.pdf (94 kB)



3/10/2022 Progress Report 6

Bella Raykowski - Apr 12, 2022, 11:25 AM CDT

Title: Progress Report 6

Date: 3/10/2022

Content by: Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, Bella Raykowski

Goals: To inform our advisor and our client of our weekly activities and progress on the project.

Content:

See attached file.

Conclusions/action items:

See attached file.

Bella Raykowski - Apr 12, 2022, 11:25 AM CDT



[Download](#)

cell_incubator-progress_report_6 - Google Docs.pdf (94.2 kB)



3/24/2022 Progress Report 7

Bella Raykowski - Apr 12, 2022, 11:26 AM CDT

Title: Progress Report 7

Date: 3/24/2022

Content by: Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, Bella Raykowski

Goals: To inform our advisor and our client of our weekly activities and progress on the project.

Content:

See attached file.

Conclusions/action items:

See attached file.

Bella Raykowski - Apr 12, 2022, 11:27 AM CDT

Message Cell Incubator

From: Dr. Amy Reynolds

Address: Dr. Amy Reynolds

Date:

- Reply: Yes (Bardwell)
- Comment on: Bella Ray
- BWE: Allow Team
- BWE: Bella Raykowski
- BWE: Bella Raykowski

Date: 3/24/2022

Project Statement

Develop a low cost cell culture incubator capable of maintaining cells in optimal temperature and oxygen levels of 37°C, 5% CO₂, and 95% RH, humidity over a long duration of time, without compromising the integrity of the microorganism's culture. Special considerations should be taken to maintain even heating and humidity across the chamber to provide the most appropriate conditions for culture. The incubator should be able to maintain optimal conditions for 24 hours. Current commercially available systems are prone to these issues and are extremely expensive. Commercial systems also tend to be large and are not the most appropriate solution for a small scale laboratory setting. Because of these risks, developing a custom incubator is a necessary and important endeavor. Because of these risks, developing a custom incubator is a necessary and important endeavor.

Goal of Team Update

The team was able to fabricate a prototype, begin working on a second, and make our current design for CO₂ monitoring. The team also performed a detailed analysis of the design. The team will determine which of the features to proceed with CO₂ monitoring based on the feedback from peers and professors during the show and tell.

Summary of Work by Team Member Design Accomplishments

- Bella: Has been focused on prototyping, prepared a poster for the show and tell, and also began working on a second prototype for the final design.
- Sam: Updated MATLAB/SIMULINK design to allow for the ability to test a range of the incubator for use of CO₂ level. Used an Arduino Uno and interfaced the module to the Raspberry Pi. Also began work on the mechanical sub-system for the CO₂ input. Contributed to the show and tell with our cell incubator.
- Maya: Continued work on the UV sterilization system in the prototype on Monday and Tuesday. We were able to test some parts of the prototype, but also learned that the existing system before we could use for control for the incubator. We completed the system for the show and tell and reported the design and work for the next experiments. We will continue to work on the prototype. Bella

[Download](#)

cell_incubator-progress_report_7_-_Google_Docs.pdf (97.9 kB)



3/31/2022 Progress Report 8

Bella Raykowski - Apr 12, 2022, 11:27 AM CDT

Title: Progress Report 8

Date: 3/31/2022

Content by: Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, Bella Raykowski

Goals: To inform our advisor and our client of our weekly activities and progress on the project.

Content:

See attached file.

Conclusions/action items:

See attached file.

Bella Raykowski - Apr 12, 2022, 11:27 AM CDT

Message Call Incubator

From: Dr. Amy Reynolds

Address: Dr. Melissa Kinney

Date:

- ① Leanne Van Derweil
- ① Conversation: Ruth Ray
- ① BWE: Alton Tanna
- ① BWE: Bella Raykowski
- ① BWE: Drew Hardwick

Date: 3/31/2022

Project Statement

Develop a low cost cell culture incubator capable of being compatible with a standard microscope and capable of being of being. The incubator should use the AM to develop an internal environment of 37 C, 5% CO₂, and 95% humidity over a long duration of time, without compromising the integrity of the microscope's optics or functionality. Special considerations should be taken to maintain even heating and humidity across the chamber as growth is crucial to experiments that use culture vessels such as 96 well plate devices. Current commercially available systems are prone to these issues and are extremely expensive. Commercial systems also tend to be large and use the entire microscope making it difficult to transport and store and remove parts. Because of these risks, deep blue leader use of the microscope is granted.

Goal Status Update

The team has begun fabrication and testing. The prototype was fabricated and placed along with the microscope testing hardware to see the final prototype. 1000 of testing was completed and the team was satisfied.

Summary of Weekly Team Meeting Design Accomplishments

- Team: The team conducted system testing procedures for week. The system testing was completed using the necessary glass covers that are needed. The team was also evaluated using glass holders and a thermal chamber used to determine how long the cells of the CO₂ can maintain to be optimal.
- Team: Team tested system-level system coupling for the testing part of the incubator. Estimated the system testing time around the needs of the microscope. Conducted flow rate testing using holders and a thermal chamber of water to determine the flow rate of the CO₂ gas. Completed some mathematical calculations to find percent flow of the water volume of the flow.
- Team: Conducted tests for the PC system to make the 1 hour delay between tests. Conducted tests for the system and the camera glass cover over the top and bottom of the incubator. Completed flow rate testing using holders and a thermal chamber of water to determine the flow rate of the CO₂ gas.

[Download](#)

cell_incubator-progress_report_8 - Google Docs.pdf (99.5 kB)



4/7/2022 Progress Report 9

Bella Raykowski - Apr 12, 2022, 11:28 AM CDT

Title: Progress Report 9

Date: 4/7/2022

Content by: Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, Bella Raykowski

Goals: To inform our advisor and our client of our weekly activities and progress on the project.

Content:

See attached file.

Conclusions/action items:

See attached file.

Bella Raykowski - Apr 12, 2022, 11:28 AM CDT

Message Cell Incubator

From: Dr. Amy Peterson
Address: Dr. Amy Peterson

- Lecture: Cell Incubator
- Conversation: Bella Ray
- BWE: Amy Peterson
- Email: Bella Raykowski
- Email: Bella Raykowski

Date: 4/7/2022

Problem Statement

Develop a low cost cell culture incubator capable of maintaining cells in optimal temperature and oxygen levels of 37°C, 5% CO₂, and 95% RH, humidity over a long duration of time, without compromising the sterility of the incubator's interior or the media. Special considerations should be taken to maintain even heating and humidity across the chamber to provide the most appropriate conditions for cell culture. Incubators are used in a variety of settings. Current commercially available systems are prone to these issues and are extremely expensive. Commercial systems also tend to be large and use less than optimal energy making it difficult to maintain and clean and reduce size. Because of these risks, they also hinder use of the incubator in general.

Goal Statement

The goal of this team was to design the circuit for the DC motor to determine if it will be strong enough to run the motor of the CO₂ tank. We decided to integrate CO₂ input into the incubator. Working protocols for humidity, temperature, and CO₂ sensing were also completed to ensure that the incubator was working correctly.

Summary of Weekly Team Member Design Accomplishments

- Team: We have completed assembly of the DC motor. We have also tested the motor's strength and noted both the CO₂ and temperature feedback systems. The team also worked on the incubator system.
- Bella: Worked on the functionality of the DC motor. Fabricated part of the motor system using the breadboard. General knowledge of the motor and its components to improve the motor's strength for the incubator and prepared that file to be used for the incubator. Prepared for incubator assembly.
- Katie: Completed functionality of the DC motor and tested the motor on the motor board. We also worked on the incubator's humidity and temperature sensing system. We also worked on the incubator's CO₂ and temperature feedback systems. After testing the incubator, it was determined

[Download](#)

cell_incubator-progress_report_9 - Google Docs.pdf (97.5 kB)



4/14/2022 Progress Report 10

Bella Raykowski - May 03, 2022, 11:08 AM CDT

Title: Progress Report 10

Date: 4/14/2022

Content by: Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, Bella Raykowski

Goals: To inform our advisor and our client of our weekly activities and progress on the project.

Content:

See attached file.

Conclusions/action items:

See attached file.

Bella Raykowski - May 03, 2022, 11:08 AM CDT

Message Call Recorder

4/14/2022 10:54 AM
Message Call Recorder
Message Call Recorder
Date: 4/14/2022

Problem Statement

Develop a low cost cell culture incubator that is compatible with a general purpose and capable of low cost. This incubator should be able to maintain an internal environment of 37 C, 5% CO₂, and 90% RH, humidity over a long duration of time, without compromising the integrity of the incubator's optics or hardware. Special considerations should be taken to maintain environmental stability within the incubator as graduate students in preparation from low income colleges are to use self-made devices. Commercial systems also need to be kept in mind as the target audience is likely to be students and teachers in rural areas. Because of their size, they also cannot be of the size of a general purpose.

Goal Statement Update

The team was able to fabricate the incubator for using the low cost and high quality. The team was able to fabricate the incubator for using the low cost and high quality. The team was able to fabricate the incubator for using the low cost and high quality. The team was able to fabricate the incubator for using the low cost and high quality.

Summary of Weekly Team Meeting Design Accomplishments

- Design the incubator for low cost and high quality for the DC maker fair and other events.
- Design the incubator for low cost and high quality for the DC maker fair and other events.
- Design the incubator for low cost and high quality for the DC maker fair and other events.
- Design the incubator for low cost and high quality for the DC maker fair and other events.

[Download](#)

cell_incubator-progress_report_10_-_Google_Docs.pdf (101 kB)



4/21/2022 Progress Report 11

Bella Raykowski - May 03, 2022, 11:09 AM CDT

Title: Progress Report 11

Date: 4/21/2022

Content by: Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, Bella Raykowski

Goals: To inform our advisor and our client of our weekly activities and progress on the project.

Content:

See attached file.

Conclusions/action items:

See attached file.

Bella Raykowski - May 03, 2022, 11:09 AM CDT

Message Call Incubator

From: Dr. Sara Pascoe
 Action: Dr. Sara Pascoe
 Open
 [X] Reply to Sara Pascoe
 Date: 4/21/2022

Problem Statement

Develop a low cost cell culture incubator chamber that is compatible with a standard microscope and capable of low cell density. This incubator should be able to maintain an internal environment of 37 C, 5% CO₂, and 95% RH, humidity over a long duration of time, without compromising the integrity of the microscope optics or hardware. Special considerations should be taken to maintain cross-contamination within the chamber as graduate students in preparation from low volume culture use it as an off-shelf device. Current commercially available systems are prone to these issues and are extremely expensive. Commercial systems also tend to be large and make the setup and storage of multiple units a costly and tedious maintenance task. Because of their size, they also limit use of the microscope in general.

Goal Status Update

The team was able to monitor temperature and humidity during temperature testing and was able to set a range around temperature in the incubator was 37 K. Humidity testing was conducted, and although it does not meet our requirements, we believe that it is the most cost-effective in the field. The RH sensor used was not able to be used and was difficult to use.

Summary of Weekly Team Meeting Design Accomplishments

- Team: We have identified the functions necessary for our incubator using a comparison and analysis.
- Team: Conducted a comparison of incubators in the market. Identified that glass, copper, glass, and aluminum were the most common materials used in the design. Identified that glass and aluminum were the most common materials used in the design. Identified that glass and aluminum were the most common materials used in the design.
- Team: Tested the copper chamber in our laboratory. We compared the results of our design to the results of the copper chamber. We found that the copper chamber was able to maintain a constant temperature and humidity. We found that the copper chamber was able to maintain a constant temperature and humidity. We found that the copper chamber was able to maintain a constant temperature and humidity.

[Download](#)

cell_incubator-progress_report_11_-_Google_Docs.pdf (103 kB)



4/28/2022 Progress Report 12

Bella Raykowski - May 03, 2022, 11:09 AM CDT

Title: Progress Report 12

Date: 4/28/2022

Content by: Katie Day, Sam Bardwell, Maya Tanna, Drew Hardwick, Bella Raykowski

Goals: To inform our advisor and our client of our weekly activities and progress on the project.

Content:

See attached file.

Conclusions/action items:

See attached file.

Bella Raykowski - May 03, 2022, 11:10 AM CDT

Message Call Description

From: Dr. Sara Pascoe
Subject: Dr. Melissa Kemp
To:
- [X] Lander, Sam Bardwell
- [X] Commissioner, Katie Day
- [X] [REDACTED], Maya Tanna
- [X] [REDACTED], Bella Raykowski
- [X] [REDACTED], Drew Hardwick
Date: 4/28/2022

Problem Statement

Develop a low cost cell culture incubator chamber that is compatible with a standard microscope and capable of low cell density. This incubator chamber will be able to maintain an internal environment of 37 C, 5% CO₂, and 95% RH, humidity over a long duration of time, without compromising the integrity of the microscope's optics or lens/camera. Special considerations should be taken to maintain cross-lamination flexibility across the chamber as graduate students in progress have been unable to design one to use with a microscope. Current commercially available systems are prone to these issues and are extremely expensive. Commercial systems also tend to be large and use less the same microscope looking capability as a standard microscope and camera. Because of their size, they also limit use of the microscope in general.

Final Status Update

The team conducted assembly testing, determined the viability of the DC board, and worked on final adjustments.

Summary of Weekly Team Meeting Design Accomplishments

- Team: We have completed assembly testing and control on final prototypes.
- Sam: Conducted assembly testing of the system (connected to the final power and generation) finished the final presentation.
- Katie: Attempted to reprogram the chips, to get an all-in-one solution from the space of the chip. Conducted BC, sensor testing (started under the final power presentation and the final report) (completed assembly testing).
- Maya: Worked on the final power presentation and the final report. Completed assembly testing with Katie and Bella. (expanded efforts in the weekend).
- Drew: Worked on the final power and report. Conducted BC sensor and CO₂ sensor testing.
- Bella: Completed the assembly testing and finished the final report, presentation and made one the submission one again later.

[Download](#)

cell_incubator-progress_report_12_-_Google_Docs.pdf (98.3 kB)



9/10/2022 - Motivation

Drew Hardwick - Dec 13, 2022, 8:24 AM CST

Title: Project Motivation

Date: 9/10/22

Content by: Drew Hardwick

Present: N/A

Goals: Establish Project Significance

Motivation/Project Significance:

Cell culture is a commonly practiced laboratory method for the use of studying cell biology, replicating disease mechanisms, and investigating drug compounds. Due to the use of live cells during this process, incubators are necessary to keep the cells viable for the duration of the study. Onstage incubators allow for live cell growth because they maintain a highly regulated internal environment of 37 °C, 5% CO₂, and 95% humidity, without compromising the integrity of the microscope. The COVID-19 pandemic has caused the CO₂ incubator market to increase by 7.69% with an estimated market growth acceleration of 8% over the next decade. Major disadvantages of current commercially available systems are that they tend to be large and bulky enclosing the entirety of the microscope making it difficult to assemble and remove between uses while hindering the use of the microscope in general, and they are often expensive; Fisher Scientific's Enviro-Genie cell incubator is priced at \$6,510.68. This project will focus on developing a low-cost cell culture incubator that allows for interchangeable culture plates, compatibility with an inverted microscope, easy disinfection, and live cell imaging via maintenance of the internal environment needed for cell growth.

This project has the potential to make small scale, teaching laboratories much more efficient and cost effective. There is currently no product like this on the market that is anywhere near the \$100 price tag our incubator will have. Successful design of this product would provide a cheap, easy, and effective way for professors and teachers across the country to teach students about cell growth and tissue engineering. The client envisions the final product being packaged and sold, marketed as a DIY imaging cell incubator setup, and hopes that other professors (and even high school teachers) across the country will purchase the product for use to inspire the next generation about the wonders of cell growth and tissue engineering.



9/23/2022 Preliminary Design Specifications

Drew Hardwick - Dec 12, 2022, 5:27 PM CST

Title: Preliminary Report

Date: 9/23/2022

Content by: Whole Team

Present:

Goals: To Establish our Product Design Specifications

Content:

- See attached file.

Conclusions/action items:

Begin fabrication, testing, and purchasing.

Drew Hardwick - Dec 12, 2022, 5:28 PM CST

Product Design Specifications



Microscope Cell Culture Incubator

8000 600
23 September 2022

Chair: Dr. John Pucinski
University of Wisconsin-Madison
Department of Mechanical Engineering

Team:
Aashu Day
Aashu Bhandari
Aashu Tanna
Drew Hardwick
Bella Kopylovskii

[Download](#)

Product_Design_Specifications_Fall_2022.pdf (222 kB)



10/7/2022- Preliminary Presentation

Drew Hardwick - Dec 12, 2022, 5:32 PM CST

Title: Preliminary Presentation

Date: 10/7/2022

Content by: Katie Day, Sam Bardwell, Drew Hardwick, Bella Raykowski, and Maya Tanna

Present:

Goals: To present our preliminary findings with our advisor, client, and peers.

Content:

See attached file.

Conclusions/action items:

Begin ordering materials and prototyping.

Katie Day - Oct 07, 2022, 12:12 PM CDT



[Download](#)

Prelim_Presentation_Slides_Fall_2022_1_.pdf (2.22 MB)



10/12/2022 Preliminary Report

Katie Day - Oct 12, 2022, 11:00 AM CDT

Title: Preliminary Report

Date: 10/12/2022

Content by: Whole Team

Present:

Goals: To present our preliminary findings.

Content:

See attached file.

Conclusions/action items:

Begin fabrication and testing.

Katie Day - Oct 12, 2022, 11:01 AM CDT

Microscopic Cell Culture Incubator
Preliminary Report



10/12/2022
October 12, 2022

Class: Dr. John Parvizli
University of Wisconsin-Madison
Department of Biomedical Engineering

Advisor: Dr. Arad Nivinskas
University of Wisconsin-Madison
Department of Biomedical Engineering

Team:
Leader: Sam Bradford
Members: Katie Day
BRIAN: Brian Torres
BRIAN: Brian Torres
BRIAN: Brian Torres

[Download](#)

Prelim_Report_Fall_2022.pdf (4.58 MB)



12/9/2022 Final Presentation

Drew Hardwick - Dec 12, 2022, 5:33 PM CST

Title: Preliminary Presentation

Date: 12/12/2022

Content by: Katie Day, Sam Bardwell, Drew Hardwick, Bella Raykowski, and Maya Tanna

Present: All

Goals: To present our final findings to our advisor, client, and peers.

Content:

See attached file.

Conclusions/action items:

Finish Final Deliverables

Drew Hardwick - Dec 12, 2022, 5:33 PM CST



[Download](#)

Final_Poster_Cell_Incubator_Fall_2022.pdf (2.06 MB)



12/12/2022 Final Report

Katie Day - Dec 12, 2022, 5:31 PM CST

Title: Final Report

Date: 12/12/2022

Content by:

Present:

Goals: To finalize our work for the semester.

Content:

See attached file.

Conclusions/action items:

Katie Day - Dec 12, 2022, 5:31 PM CST

Microscope Cell Culture Incubator
Final Report



2022-2023
December 14, 2022

Chair: Dr. John Parnell
University of Wisconsin-Madison
Department of Biomedical Engineering

Advisor: Dr. Aron Skerfving
University of Wisconsin-Madison
Department of Biomedical Engineering

Team:

Leahli Ann Burdett
Cassandra Kay Day
Bryan Alan Soren
Bryan Della Kerkow
Bryan Chase Theobald

[Download](#)

Final_Report_Fall_2022.pdf (23.9 MB)



12/10/22 Incubator Disinfectants and Cleaning

SAMUEL BARDWELL - Dec 10, 2022, 3:51 PM CST

Title: Incubator Disinfectants and Cleaning

Date: 12/10/22

Content by: Sam

Goals: To provide ways to reduce contamination within our incubator box.

Content:

Link: https://beta-static.fishersci.com/content/dam/fishersci/en_US/documents/programs/scientific/technical-documents/instruction-sheets/Thermo-Scientific-incubator-care-instruction.pdf

Cite: M. K. Bates and D. Wernerspach, "Proper Care and Maintenance for Your Cell Culture Incubator," p. 6.

Content:

- There are many possible disinfectant agents we could use to clean our incubator.
- Some cleaners are considered VOCs (volatile organic chemicals) that can induce expression of heat shock and other stress proteins

We must be aware of what disinfectants we use when dealing with live cell incubation so we do not hurt our own cell growth.

- The best cleaner according to this article is quaternary ammonium disinfectant based on broadly effective against a range of microorganisms and harmless (non-corrosive) to incubator components.
- We should not use bleach.
- Sterile distilled water should also be considered for use in our water well.

Conclusions/action items:

After conducting our live cell testing this semester, we noticed some unwanted mold growth within our incubator. This was most likely due to poor attention to disinfecting our incubator before and during use. It was an unforeseen problem that only became apparent during our live cell testing but will be addressed next semester. This article was helpful with providing a possible solution that we could use to disinfect our incubator without damaging our incubator or cells with quaternary ammonium.



12/10/22 Clean Incubator Practices

SAMUEL BARDWELL - Dec 10, 2022, 4:12 PM CST

Title: Clean Incubator Practices

Date: 12/10/22

Content by: Sam

Goals: To learn the best practices for incubator maintenance and cleanliness.

Content:

Link: https://ibc.utah.edu/_resources/documents/fact-sheets-and-sops/best-practices-for-co2-incubator-maintenance-fact-sheet.pdf

Cite: "Best practices for CO2 incubator maintenance fact sheet - IBC," *Best Practices for CO2 Incubator Maintenance*. [Online]. Available: https://ibc.utah.edu/_resources/documents/fact-sheets-and-sops/best-practices-for-co2-incubator-maintenance-fact-sheet.pdf. [Accessed: 10-Dec-2022].

Content:

- Reducing contamination: Clean the lab room. Many microorganisms are on dust particles and floating in the air
- Incubator disinfectants: Best is quaternary ammonium disinfectant
- Cleaning the Incubator: Have regular cleaning of the incubator. Clean the water every other week. Clean entire incubator at least once a month and allow air dry.
- Importance of Correct water: Agents can be added to pan water to prevent microbial growth.

Conclusions/action items:

This tips will be used to prevent mold growth next semester. I think the biggest ones we have to pay attention to is keeping the incubator wiped down with disinfectant before starting any live cell growth. The next biggest is possibly using an antimicrobial growth agent within our water to prevent any mold growth.



9/12/22 ibidi Stage Top Incubator

SAMUEL BARDWELL - Sep 13, 2022, 10:21 AM CDT

Title: ibidi Stage Top Incubator

Date: 9/12/22

Content by: Sam

Goals: To research any new possible designs that we were not aware of last semester.

Content:

Link: <https://ibidi.com/stage-top-incubators/288-ibidi-stage-top-incubator-multiwell-plate-co2-silver-line.html>

Cite: "ibidi Stage Top Incubator Multiwell Plate, CO₂ – Silver Line | Live Cell Imaging," *ibidi*. <https://ibidi.com/stage-top-incubators/288-ibidi-stage-top-incubator-multiwell-plate-co2-silver-line.html> (accessed Sep. 12, 2022).

- Small, precise functioning stage top incubator that is compatible with an inverted microscope
- Uses a heated glass to reduce condensation on the viewing glass
- Uses a gas mixer to keep Oxygen levels accurate
- Has patented humidity control
- Cost is \$19,000 without shipping



Figure 1: ibidi Stage Top Incubator photo

Conclusions/action items:

This stage top incubator would be perfect for our task at hand except for the fact that it is \$18k. We are trying to develop an incubator very similar to this for a fraction of the cost. I will be looking into and considering heating our outer glass panel in order to reduce the amount of condensation on our glass. I thought this was a unique solution to that problem we faced last semester.



9/12/22 Solenoid Valve Research

SAMUEL BARDWELL - Sep 13, 2022, 10:21 AM CDT

Title: Solenoid Valve Research

Date: 9/12/22

Content by: Sam

Goals: To understand how a solenoid valve works and see if it is a good implementation to our CO2 input.

Content:

Link: <https://sciencing.com/what-solenoid-4902174.html>

Cite: "How Does a Solenoid Work?," *Sciencing*. <https://sciencing.com/a-solenoid-work-4567178.html> (accessed Sep. 12, 2022).

- Common applications are a power switch, valve, and sprinkler system. Our main use would be as a valve.
- Solenoid valves use electricity to create a magnetic field which will either open or close a piston depending on if the electricity is running or not.
- In valves, the solenoid requires constant electrical input to stay open.
- Can be AC or DC
- Can be pneumatic or hydraulic solenoids.



Figure 1: Example of a solenoid valve

Conclusions/action items:

Solenoids valves are going to be our main focus for CO2 input regulation this semester. It is important to understand how they work so when it is time to implement it into the whole system, there is a smooth transition. The biggest worry with solenoids is the cost but we are willing to give up quality of the incubator for a cheaper cost. We will also be considering other type of CO2 inputs in the future.



9/13/22 Ball Valve Research

SAMUEL BARDWELL - Sep 13, 2022, 10:19 AM CDT

Title: Ball Valve Research

Date: 9/13/22

Content by: Sam

Goals: To research possible CO2 input mechanisms.

Content:

Link: [PVC Ball Valve - How They Work | Tameson.com](#)

Cite: "PVC Ball Valve - How They Work | Tameson.com," *Tameson*. <https://tameson.com/pvc-ball-valve.html> (accessed Sep. 13, 2022).

- Uses a simple PVC or brass outer tubing with a lever that can be twisted
- The lever that can be twisted is connected to a ball inside the tubing that has a through cut hole within it
- The the lever is turned perpendicular to the tubing the ball will rotate inside and the through cut in the ball will not align with the tubing, blocking any air or fluids from going through
- When the lever is parallel to the tubing, the through cut in the ball is aligned to the tubing, allow things to pass through.



*Figure 1: Example of a double union
PVC ball valve.*

Conclusions/action items:

This is a cheap and very possible method to help us with CO2 regulation. These types of valves can be found on Grainger. We can brainstorm a way to connect a DC motor to the valve which will allow us to have automatic control of the valve. I will continue to look at different valve ideas and possibilities and also share this idea with the team.



9/18/22 Solenoid Air Valve

SAMUEL BARDWELL - Sep 18, 2022, 2:02 PM CD

Title: Solenoid Air Valve

Date: 9/18/22

Content by: Sam

Goals: To find an affordable solenoid valve.

Content:

Link: https://www.amazon.com/4inch-Normally-Closed-Electric-Solenoid/dp/B074Z5SDG3/ref=asc_df_B074Z5SDG3/?tag=hyprod-20&linkCode=df0&hvadid=198072472254&hvpos=&hvnetw=g&hvrnd=6108957746982655889&hvpon=&hvptwo=&hvqmt=&hvdev=c&hvdvcmdl=&hvlocint=&hvlocphy=9018948&hvtargid=p360267761983&psc=1



1/4inch DC 12V 2 Way Normally Closed Electric Solenoid Air Valve

Brand: Plum Garden

★★★★★ - 592 ratings | 41 answered questions

Amazon's Choice in Solenoid Valves by Plum Garden

\$9³⁵

Get Fast, Free Shipping with Amazon Prime & FREE Returns -

Available at a lower price from other sellers that may not offer free Prime shipping.

Product details

Material	Stainless Steel
Brand	Plum Garden
Exterior Finish	Aluminum
Inlet Connection Type	National Pipe Tapered

- Holds up to 100 psi (We on

need ~14)

- 1/4" threads

- Electrically controlled.

- Valve stays closed when the coil is de-energized- and it opens when energized

Conclusions/action items:

This sounds like a very possible solenoid valve to use for our design. Need to figure out how to get reimbursed from Amazon. Will continue to explore other valve possibilities.



9/26/22 Rubber Stopper for Testing Lid

SAMUEL BARDWELL - Sep 26, 2022, 12:34 PM CDT

Title: Rubber Stopper for Testing Lid

Date: 9/26/22

Content by: Sam

Goals: To find rubber stoppers to use to plug the holes on the testing lid when inserting the sensors.

Content:

GRAINGER APPROVED **GRAINGER CHOICE**

Stopper: 00 Stopper Size, 24 mm Neck Size, Natural Rubber, Black, 90 PK

Item # **9U116** Mfr. Model # **RST00-S**
 UNSPSC # **40141738** Catalog Page # **N/A**

Country of Origin **India**. Country of Origin is subject to change.

Compare this product

Web Price **\$9.23** (/pkg of 90)

Qty: **1** **Add to Cart**

Ship Pickup

Expected to arrive **Tue, Sep 27**.
 Ship to **53701** | [Change](#)

Shipping Weight: **1 lbs**
[Ship Availability Terms](#)

[Product Image Feedback](#)

- 10mm - 15 mm 00 stopper size rubber stoppers from Grainger

- Fit the half inch hole design I made for the test lid

Link: <https://www.grainger.com/product/GRAINGER-APPROVED-Stopper-00-Stopper-Size-9U116>

Conclusions/action items:

Double check with the team to make sure we want those dimensions for the test lid and the put in an order request to get these rubber stoppers. Before we decide to order them, we should see if the Makerspace or TeamLab or Dr P has extras.



9/29/22 Solenoid Adaptors

SAMUEL BARDWELL - Sep 29, 2022, 11:03 AM CDT

Title: Solenoid Adaptors

Date: 9/29/22

Content by: Sam

Goals: To find adaptors for the solenoid.

Content:

Link: https://www.amazon.com/outstanding-Fitting-Connector-Barb-Fitting-Accessory/dp/B08LMMJG1S/ref=sr_1_3?keywords=g+1%2F4+to+1%2F4+barb&qid=1664467167&qu=eyJxc2MiOiJwLjg4IiwicXNhIjojMC42NSIsInFzcCI6IjAuMDAifQ%3D%3D&sr=8-3

keywords=g+1%2F4+to+1%2F4+barb&qid=1664467167&qu=eyJxc2MiOiJwLjg4IiwicXNhIjojMC42NSIsInFzcCI6IjAuMDAifQ%3D%3D&sr=8-3



E-outstanding 4-Pack G1/4" Soft Tube Fitting Connector Adapter Barb-Fitting for PC Water Cooling System Accessory 6mm Hose

Brand: E-outstanding
★★★★☆ - 10 ratings

\$9.59

Get Fast, Free Shipping with Amazon Prime.

Get \$50 off instantly: Pay \$0.00 \$9.59 upon approval for the Amazon Rewards Visa Card. No annual fee.

Product details

Material: Brass

\$9.59

Get Fast, Free Shipping with Amazon Prime

FREE delivery **Wed, Oct 5** if you spend \$25 on items shipped by Amazon

Or fastest delivery **Sun, Oct 2**. Order within 13 hrs.

Select delivery location

Only 11 left in stock - order soon.

Qty: 1

Add to Cart

Buy Now

Conclusions/action items:

Order these adaptors for the solenoid to connect tubing.



10/31/22 Solenoid Flow Rate Math

SAMUEL BARDWELL - Nov 01, 2022, 3:26 PM CDT

Title: Solenoid Flow Rate Math

Date: 10/31/22

Content by: Sam

Goals: To mathematically determine the flow rate of the solenoid valve at 17 PSI.

Content:

Link: <https://blog.exair.com/2018/11/08/how-to-calculate-scfm-volume-when-operating-at-any-pressure/#:~:text=As%20shown%20in%20the%20formula,consume%2014%20SCFM%20%40%2080%20PSIG.>

Content:

The 1100 Super Air Nozzle Is Rated To Consume 14 SCFM @ 80 PSI,
What Will The SCFM Be At 105 PSI?

$$\text{New SCFM} = \text{SCFM @ rated pressure} \left(\frac{\text{actual gauge pressure} + 14.7 \text{ psia}}{\text{rated pressure} + 14.7 \text{ psia}} \right)$$

$$X = 14 \text{ SCFM} \left(\frac{105 \text{ psig} + 14.7 \text{ psia}}{80 \text{ psig} + 14.7 \text{ psia}} \right)$$

$$X = 14 \text{ SCFM} \left(\frac{119.7}{94.7} \right)$$

$$X = 14 \text{ SCFM} (1.264)$$

$$X = 17.69 \text{ SCFM}$$

- I used this equation found on the internet and plugged in the solenoids product description for for flow rate. 22 SCFM at 100 PSI (Air Flow)

Product Description

Feature:

Port Size : G1/4"

Model Number: 2V025-1/4-12VDC

Seal Material: NBR (Buna N)

Armature Tube Material: Brass

Body Material: Anodized Aluminum

Plunger & Spring Material: Stainless Steel

Response Time: Less than 20 ms

Port Size: G1/4" DN8

Operating Temperature: -10 to 80 °C

Coil Power: 6.5W

Coil Duty: 100% ED (Continuous Duty)

Coil Voltage: DC12V,

Service Media: Air, Gas, Liquid, Water

Valve Type: 2 Way Normally Closed (Valve opens with energized)

Flow Rate: 0.23Cv (Fluid Flow), 22 SCFM at 100 PSI (Air Flow)

Operating Pressure: 0.05 - 0.7Mpa(can be operated at 0 PSI (Vacuum))

Package included:

1 x 1/4inch DC 12V Electric Solenoid Air Valve

- Plugging 22 in for the SCFM @ the rated pressure and 100 PSI at the rated pressure and then 17 PSI in for the actual gauge pressure, I obtained a value of 6.08 SCFM

- 6.08 SCFM is the Standard Cubic Feet per Minute but needs to be converted to CFM. In order to do this I need the temperature, humidity, barometric pressure, SCFM, and inlet pressure. I looked up this information for the date we conducted the flow rate testing with the balloons.

Monday Oct, 24th

Temp: Room temp 68 °F

SCFM: 6.08 (based on math from above)

Inlet Pressure: 17 PSI (pressure coming out of tank)

Barometric pressure: 29.73 (based on weather data)

Relative Humidity: 61% (weather data)

- After plugging in the values to a SCFM to CFM calculator (linked below) the CFM of the gas coming out of the solenoid based on mathematical calculations is 5.25 CFM.

SCFM to CFM Link: <https://www.coastpneumatics.com/scfm-conversion/>

- After obtaining the new CFM value, an online calculator was used to convert CFM to mL/s

Link: <https://www.kylesconverter.com/flow/cubic-feet-per-minute-to-milliliters-per-second>

mL/s with the tank set to 17 PSI based on mathematical calculation is 2477.72 mL/s

Conclusions/action items:

This does not agree with our testing of 335 mL/s. Further research will be conducted and possibly retesting the flow rate with balloons can be conducted.



11/1/22 Solenoid Flow Rate Math PSI and D

SAMUEL BARDWELL - Dec 10, 2022, 7:30 PM CST

Title: Solenoid Flow Rate Math PSI and D

Date: 11/1/22

Content by: Sam

Goals: To mathematically calculate the flow rate of CO₂ coming through the solenoid valve.

Content:

- The output pressure from the CO₂ tank is set to 17 PSI using a regulator
- The diameter of the solenoid pipe is 2 mm
- Calculator to calculate flow rate from pressure and diameter of pipe.

Link: <https://www.omnicalculator.com/conversion/psi-to-gpm>

Pressure at exit: 14.76 PSI

Pressure Entering Solenoid: 17 PSI

Pressure inside tank: 750 PSI

Diameter of pipe: 2 mm

Flow Rate in mL/s: 17.46 mL/s @ 17 psi

21.0 mL/s @ 18 psi

316.39 mL/s @ 750 psi

Conclusions/action items:

If we are using the psi from the regulator, the flow rate appears to be very small, but if we use the psi from the tank, the flow rate nearly matches our calculated flow rate exactly. 316 mL/s compared to 335 mL/s.



12/11/22 Bernoulli's Equation

SAMUEL BARDWELL - Dec 12, 2022, 4:59 PM CST

Title: Bernoulli's Equation

Date: 12/11/22

Content by: Sam

Goals: To use Bernoulli's equation to solve for an expected flow rate outside of the solenoid valve.

Content:

 Image preview

Conclusions/action items:

This outputted to a value fairly close to the flow rate we calculated using the balloon and water displacement measurements. We had a 5% error which is pretty good. Some possible sources of error are the tension in the latex of the balloon reducing the actual volume of gas outputted by the solenoid valve. There was also possible leakages when tying the balloon in a knot. We may want implement the expected flow rate into our solenoid code, but this would need to be tested to see if it is accurate.



11/11/22 Tong Lecture

SAMUEL BARDWELL - Nov 11, 2022, 12:33 PM CST

Title: Tong Lecture

Date: 11/11/22

Content by: Sam

Goals: To learn about entrepreneurship.

Content:

- 50%+ young adults are interested in starting their own business.
- Entrepreneurship is very sought out in the business school
- Engineers play a critical role in entrepreneurship. Foundation to the global economy.
- Use entrepreneurship thinking frequently to make it a habit.
- Entrepreneurship is a rare training topic for engineers. Need to equip engineers with tools and strategies.
- Strongly context dependent. Most research looks at individual level determinants.
- Three reasons why student entrepreneurship is important.
 1. many students have strong interests.
 2. Research done at universities can provide new opportunities that can lead to formations of new things.
 3. The role of a university is seen as broader than just generating IP.

University Entrepreneurial Role

- Economic and social development
- Commercialization of research
- Managerial and attitudinal changes
- Industry enthusiasm
- TEO is a new office to foster the entrepreneurial environment.
- UW Madison is now a partner in the Great Lakes Hub

Conclusions/action items:

After this lecture I am more informed about what entrepreneurship is and how I can become one. I am aware that we are trying to make this topic more accessible to engineers at UW and I have to seek out help and resources if it is an interest to me.



9/15/22 Progress Report 1

SAMUEL BARDWELL - Sep 19, 2022, 6:46 PM CDT

Title: Progress Report 1

Date: 9/15/22

Content by: Sam

Goals: To record weekly progress and work.

Content:

- Researched different ways to regulate airflow in order to have options for CO₂ input this semester.
- The best options I have come up with so far is the use of a solenoid valve or a ball valve.

Conclusions/action items:

- Continue to find ways to regulate air flow for our CO₂ input mechanism.
- Begin looking at costs and ordering materials.
- Develop a design matrix for CO₂ input.



9/22/22 Progress Report 2

SAMUEL BARDWELL - Sep 21, 2022, 10:52 AM CDT

Title: Progress Report 2

Date: 9/22/22

Content by: Sam

Goals: To track weekly individual progress.

Content:

- Researched more possible CO2 input valves that we could continue to move forward with and create a design matrix with.
- Brainstormed ideas to possibly heat up the incubator glass to reduce the amount of condensation.
- Updated and finalized the PDS.
- Attended and led the client meeting to update the client on the scope of the project this semester and to receive feedback.

Conclusions/action items:

- Order a solenoid valve from amazon to begin testing circuitry and CO2 regulation.
- Continue to research ways to reduce condensation on the glass.
- Either order an anti-fog spray from amazon or develop a way to heat the glass on the box to reduce condensation formation.
- Develop a design matrix for CO2 input



9/29/22 Progress Report 3

SAMUEL BARDWELL - Sep 28, 2022, 4:42 PM CDT

Title: Progress Report 3

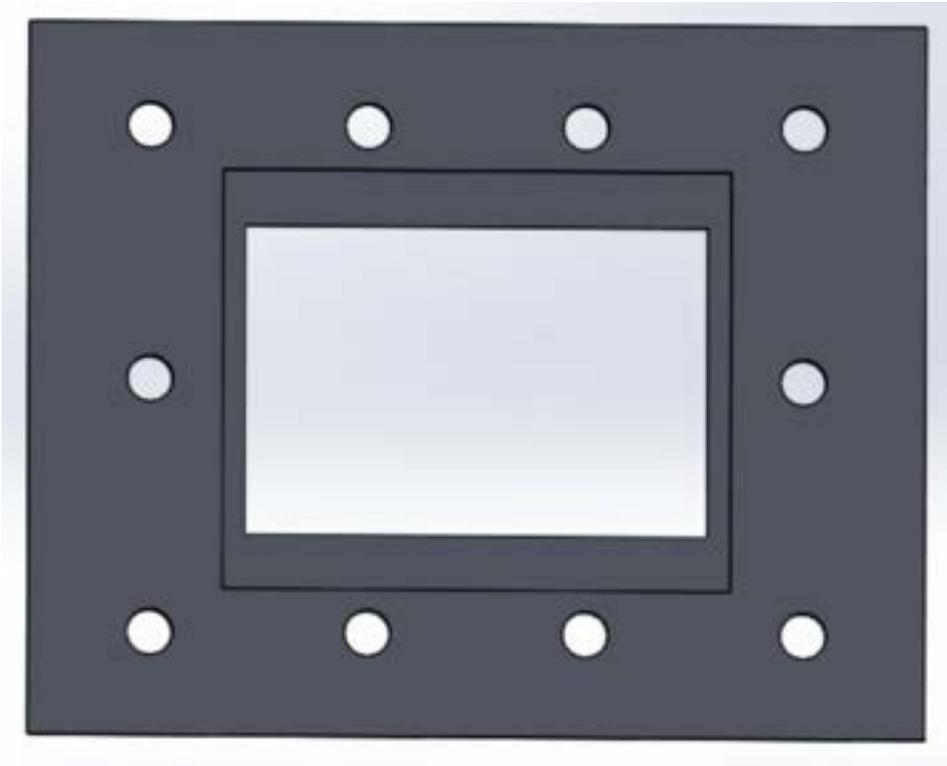
Date: 9/29/22

Content by: Sam

Goals: To give weekly updates on my progress.

Content:

- Developed CAD drawings in SOLIDWORKS for the homogeneity testing lid (Under Design Ideas).



- Helped create the design matrix to determine the best way to control CO2 input.

- Found rubber stoppers on Grainger to use for the testing lid (Under Part Research).

GRAINGER APPROVED **GRAINGER CHOICE**

Stopper: 00 Stopper Size, 24 mm Neck Size, Natural Rubber, Black, 90 PK

Item # 90116 Mfr. Model # RST00-S
UNSPSC # 40141738 Catalog Page # N/A

Country of Origin India. Country of Origin is subject to change.

Compare this product

Web Price [?]
\$9.23 (/pkg. of 90)

Qty: **Add to Cart**

Ship Pickup

Expected to arrive Tue, Sep 27.
Ship to 53701 | [Change](#)

Shipping Weight 1 lbs
[Ship Availability Terms](#)

[Product Image Feedback](#)

Conclusions/action items:

- Possibly laser cut the testing lid so it is ready for homogeneity testing.

- Place an order to Dr P for the rubber stoppers unless he has any laying around.

- Begin working on the preliminary deliverables.



10/6/22 Progress Report 4

SAMUEL BARDWELL - Oct 05, 2022, 11:49 AM CDT

Title: Progress Report 4

Date: 10/6/22

Content by: Sam

Goals: To provide updates on my weekly progress.

Content:

- Mainly focused my time on completing the preliminary presentation and report.
- Contacted Dr. P, Makerspace, and TeamLab about rubber stoppers to use to plug holes on the homogeneity testing lid.

Conclusions/action items:

- Finalize the preliminary report.
- Help the team with the solenoid valve functioning.
- Begin fabrication on the homogeneity testing lid



10/13/22 Progress Report 5

SAMUEL BARDWELL - Oct 12, 2022, 11:05 AM CDT

Title: Progress Report 5

Date: 10/13/22

Content by: Sam

Goals: To keep a weekly report of my progress on the project.

Content:

- Helped finalize the preliminary report.
- Obtained rubber stopper for homogeneity testing

Conclusions/action items:

- Work with Katie to fabricate the homogeneity testing lid and conduct homogeneity testing.
- Help fabricate the CO₂ input for the incubator.



10/20/22 Progress Report 6

SAMUEL BARDWELL - Oct 19, 2022, 10:25 AM CDT

Title: Progress Report 6

Date: 10/20/22

Content by: Sam

Goals: To provide updates on my weekly project progress.

Content:

- Worked with Katie to laser cut and fabricate the homogeneity testing lid.
- Brainstormed ideas for the outreach project the team has to do.
- Completed peer evaluations and reflections

Conclusions/action items:

- Continue fabricating the homogeneity testing lid.
- Conduct homogeneity testing on the incubator.
- Begin writing the outreach project report.



10/27/22 Progress Report 7

SAMUEL BARDWELL - Oct 26, 2022, 6:51 PM CDT

Title: Progress Report 7

Date: 10/27/22

Content by: Sam

Goals: To update everyone with my weekly progress.

Content:

- Finished fabricating the homogeneity testing lid with Katie.

See Testing Lid Fabrication in Team Fabrication folder

- Conducted flow rate testing on the solenoid and CO₂ tank.

See flow rate testing in the team's testing and results folder

- Began to help Katie write equations to insert into the code to talk between the CO₂ sensor and solenoid valve

- Decided on outreach project ideas.

Conclusions/action items:

- Conduct temperature and humidity homogeneity testing.

- Troubleshoot the code between the CO₂ sensor and the solenoid valve.

- Prepare for show and tell.



11/3/22 Progress Report 8

SAMUEL BARDWELL - Nov 03, 2022, 9:50 AM CDT

Title: Progress Report 8

Date: 11/3/22

Content by: Sam

Goals: To keep weekly updates of my project progress.

Content:

- Researched mathematical equations to determine the flow rate based on PSI from the tank and diameter of the solenoid valve.

* See Sam Bardwell > Research > Part Research > Solenoid Flow Rate Math

- Conducted homogeneity testing for the temperature on the incubator with Katie

* See Team Activities > Experimentation > Temp Homogeneity Testing

Conclusions/action items:

- Conduct homogeneity testing for humidity next week.

- Research more mathematical equations in order to determine flow rate.

- Possibly redo flow rate testing with the balloons and solenoid valve.



11/10/22 Progress Report 9

SAMUEL BARDWELL - Nov 09, 2022, 10:35 AM CST

Title: Progress Report 9

Date: 11/10/22

Content by: Sam

Goals: To provide weekly updates on project progress.

Content:

- Conducted a second round of temperature homogeneity testing with more strict protocols and steps.

See team activities experimentation entry

- Conducted a round of humidity homogeneity testing.

See team activities experimentation entry

- Ordered a squeegee to begin fabrication on the windshield wiper idea to combat condensation issues

Conclusions/action items:

- Conduct CO₂ homogeneity testing.

- Continue possible fabrication on the windshield wiper idea.

- Contribute to outreach project report.

- Add more caulk to the leaking part of the incubator.



11/17/22 Progress Report 10

SAMUEL BARDWELL - Nov 21, 2022, 4:15 PM CST

Title: Progress Report 10

Date: 11/17/22

Content by: Sam

Goals: To provide updates on weekly progress

Content:

- Began fabrication on the wiper design with Drew in order to combat condensation

See wiper fabrication under team activities > fabrication > wiper fabrication

Conclusions/action items:

- Continue working on a possible solution for the fabrication of the wiper.

- Begin to think about preliminary presentations.

- Begin outreach project report.



11/24/22 Progress Report 11

SAMUEL BARDWELL - Nov 24, 2022, 9:06 AM CST

Title: Progress Report 11

Date: 11/24/22

Content by: Sam

Goals: To provide weekly updates on my progress.

Content:

- Fabricated more of the condensation wiper with Drew.

See Team Activities > Fabrication > Wiper Fabrication

- Did some anti-fog testing with the wiper.

See Team Activities > Fabrication > Wiper Fabrication

Conclusions/action items:

- Work on the outreach project report.

- Begin working on final deliverables.

- Help conduct live cell testing if the team is ready.



11/30/22 Progress Report 12

SAMUEL BARDWELL - Nov 30, 2022, 2:54 PM CST

Title: Progress Report 12

Date: 11/30/22

Content by: Sam

Goals: To provide weekly updates on my progress on the project.

Content:

- Began working on the outreach project report.
- Began working on the team's final poster to be ready before the final presentation

Conclusions/action items:

- Finalize poster presentation and practice.
- Begin working on the final report.
- Finish rough draft for outreach project.
- Help conduct live cell testing



12/8/22 Progress Report 13

SAMUEL BARDWELL - Dec 07, 2022, 5:04 PM CST

Title: Progress Report 13

Date: 12/8/22

Content by: Sam

Goals: To provide weekly updates of my progress.

Content:

- Conducted live cell testing.
- Worked on final deliverables

See project files in the team activities notebook.

Conclusions/action items:

Complete final deliverables.



9/18/22 Needle Valve Design Idea

SAMUEL BARDWELL - Sep 18, 2022, 2:14 PM CDT

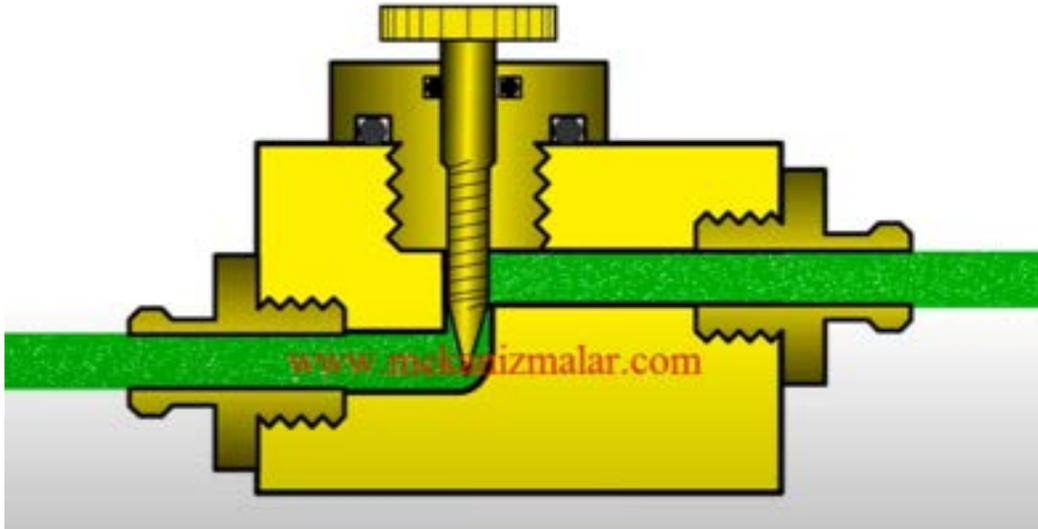
Title: Needle Valve Design Idea

Date: 9/18/22

Content by: Sam

Goals: To brainstorm a way to have CO2 input regulation.

Content:



- Uses a needle to block gas or fluid flow

Conclusions/action items:

Will brainstorm ideas on how to incorporate this into our CO2 input design. Can be machined out of materials found around the team lab or makerspace.



9/21/22 Pin Valve Design Ideas

SAMUEL BARDWELL - Sep 21, 2022, 11:12 AM CDT

Title: Pin Valve Design Ideas

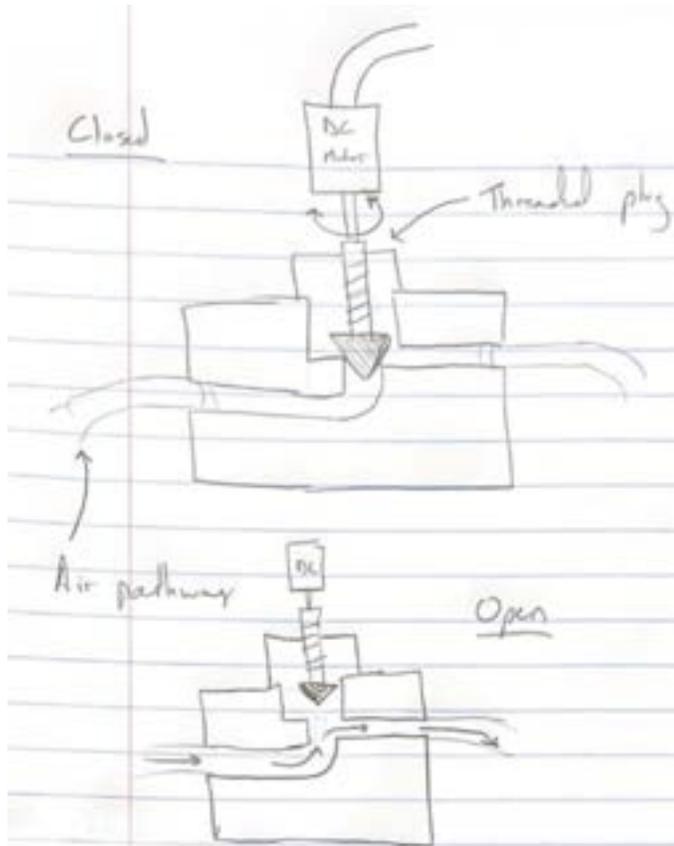
Date: 9/21/22

Content by: Sam


Goals: To develop a cheap way to regulate CO2 input.

Content:

Threaded DC Motor Pin Valve



String DC Motor Pin Valve

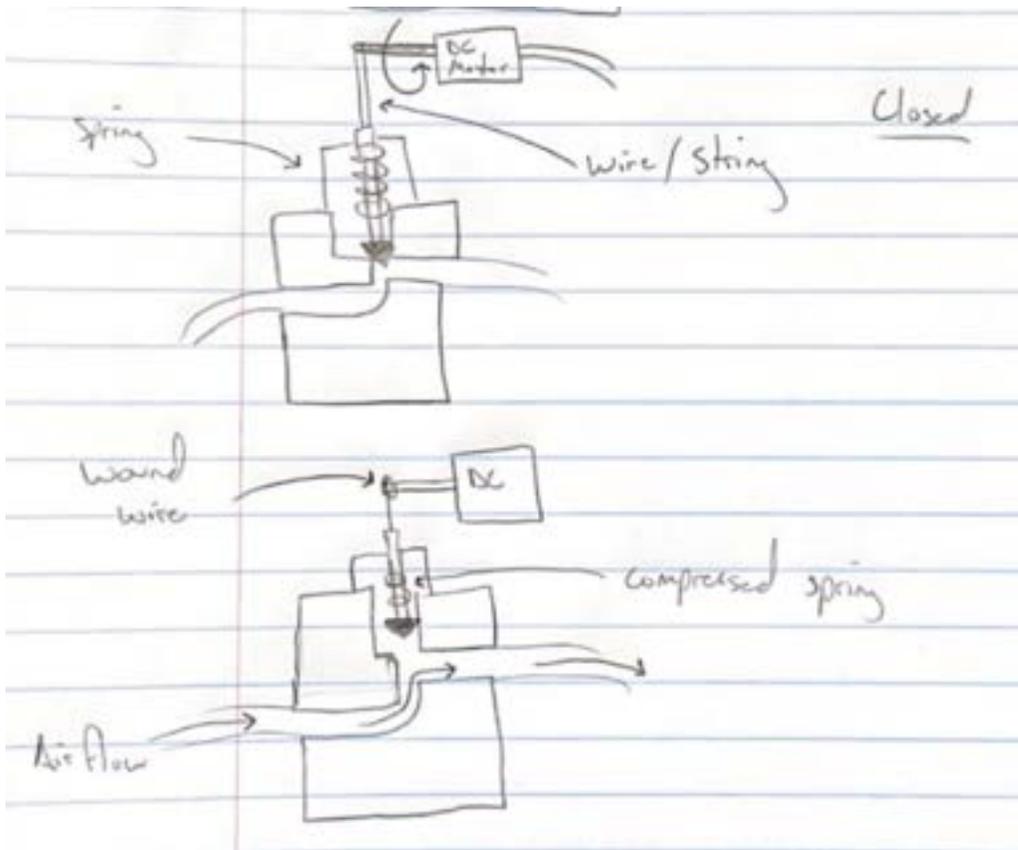

Conclusions/action items:

Will discuss these designs with the team and advisor and if approved, will go into SOLIDWORKS and start CAD drawing the designs to see if they are reasonable to pursue.



9/26/22 Testing Lid Design

SAMUEL BARDWELL - Oct 24, 2022, 6:25 PM CDT

Title: Testing Lid Design

Date: 9/26/22

Content by: Sam

Goals: To design a lid for testing on SOLIDWORKS

Content:

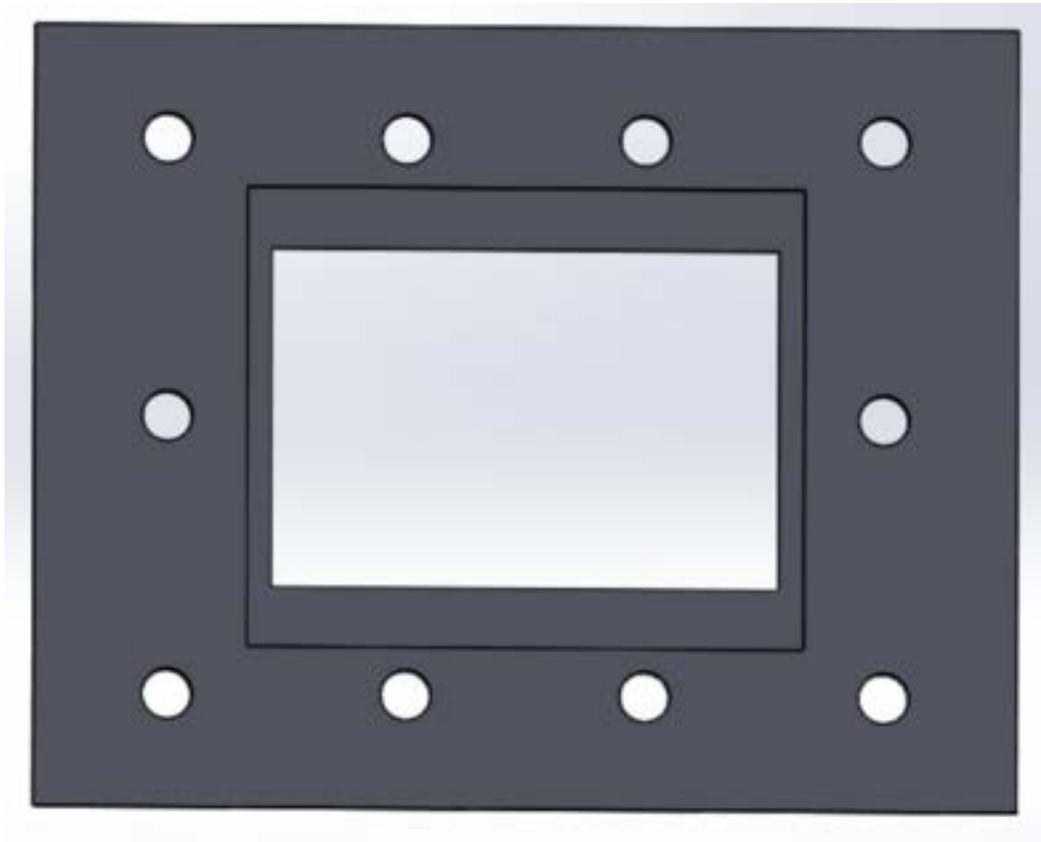


Figure 1: SOLIDWORKS Assembly for lid that can be used for testing internal homogeneity.

- Same dimensions as current lid

- Has 10 evenly spaced 1/2 inch holes surrounding the well plate glass where thermistor and CO2 sensors can be inserted to collect raw data on the temperature, humidity, and CO2 levels throughout the incubator.

Conclusions/action items:

Need to be able to laser cut from the Makerspace. Decide if there should even be a space for the glass or if we should laser cut holes in the middle where the well plate would be to collect homogeneity data from these points.



2/8/2020 Woodworking 1

SAMUEL BARDWELL - Sep 29, 2020, 11:55 AM CDT

Title: Woodworking Red Permit 1

Date: 9/29/2020

Content by: Sam

Content:

 Image preview

 Image preview



2/8/21 Biosafety Certification

SAMUEL BARDWELL - Feb 08, 2021, 5:19 PM CST

Title: Biosafety Certification

Date: 2/8/21

Content by: Sam

Goals: To be certified to work with biomaterials.

Content:

University of Wisconsin-Madison

This certifies that SAMUEL BARDWELL has completed training for the following course(s):

Course Name	Curriculum or Quiz Name	Completion Date	Expiration Date
BIOSAFETY REQUIRED TRAINING	BIOSAFETY REQUIRED TRAINING QUIZ	2/4/2021	

Data Effective: Thu Feb 4 13:40:00 2021
Report Generated: Mon Feb 8 17:06:55 2021

Conclusions/action items:

This will be useful for this semester and future semesters in Biomedical Engineering. It allows me to safely work with biomaterials.

**3/12/21 Chemical Safety Certification**

SAMUEL BARDWELL - Mar 12, 2021, 3:42 PM CST

Title: Chemical Safety Certification**Date:** 3/12/21**Content by:** Sam**Goals:** To be safe while using chemicals.**Content:**

University of Wisconsin-Madison

This certifies that SAMUEL BARDWELL has completed training for the following course(s):

Course Name	Curriculum or Quiz Name	Completion Date	Expiration Date
BIOSAFETY REQUIRED TRAINING	BIOSAFETY REQUIRED TRAINING QUIZ	2/4/2021	
CHEMICAL SAFETY: THE OSHA LAB STANDARD	FINAL QUIZ	3/4/2021	

Data Effective: Thu Mar 4 11:25:00 2021

Report Generated: Fri Mar 12 15:37:01 2021

Conclusions/action items:

Can be used for BME 201 project as well as future classes in BME or at UW Madison



10/28/21 Green Permit

SAMUEL BARDWELL - Oct 28, 2021, 8:12 AM CDT

Title: Green Permit

Date: 10/28/21

Content by: Sam

Goals: To obtain a green permit to utilize if necessary.

Content:

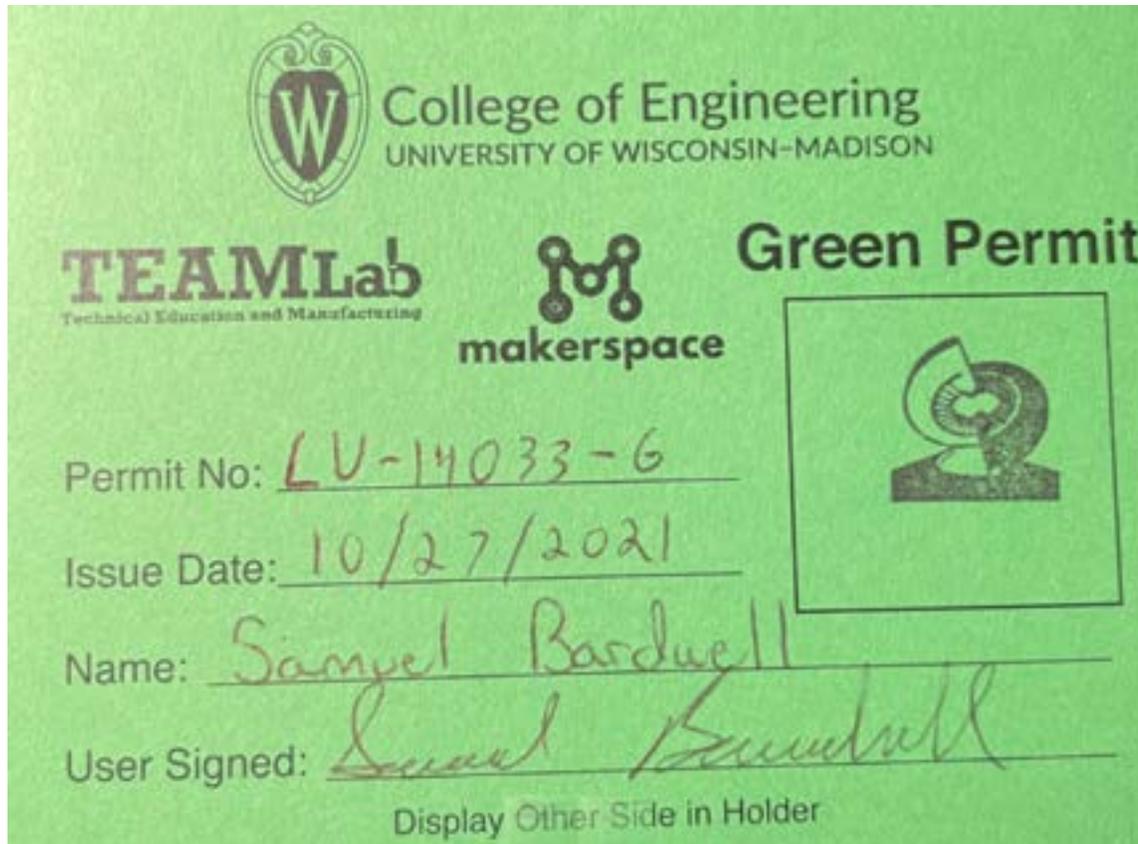


Figure 1: Front side of the green permit

TEAMLab Green Shop Permit Makerspace

Name: Samuel Bardwell

Woodworking 1:  Woodworking2: Woodworking3:

Welding1: Welding 2: Welding 3:

CNC Mill 1: CNC Mill 2: CNC Mill 3: CNC Mill 4:

CNC Lathe 1: CNC Lathe 2: Haas1: Laser1:

Ironworker 1: Coldsaw1: CNC Router 1: CNC Plasma1:

Figure 2: Back side of green permit

Conclusions/action items:

This green permit will be used if necessary for BME design projects.



2/4/22 Laser Cutter Permit

SAMUEL BARDWELL - Feb 04, 2022, 4:07 PM CST

Title: Laser Cutter Permit

Date: 2/4/22

Content by: Sam

Goals: To obtain a laser cutting permit in order to use the laser cutter for BME Design projects.

Content:

TEAMLab Green Shop Permit Makerspace

Name: Samuel Bardwell

Woodworking 1: Woodworking2: Woodworking3:

Welding1: Welding 2: Welding 3:

CNC Mill 1: CNC Mill 2: CNC Mill 3: CNC Mill 4:

CNC Lathe 1: CNC Lathe 2: Haas1: Laser1:

Ironworker 1: Coldsaw1: CNC Router 1: CNC Plasma1:

Conclusions/action items:

I will use this permit to laser cut prototypes and final designs for BME or individual projects.



1/31/22 Copper Thermal Conductivity

SAMUEL BARDWELL - Jan 31, 2022, 8:13 PM CST

Title: Copper Thermal Conductivity

Date: 1/31/22

Content by: Sam

Goals: To research the conductivity of copper to find a more efficient way to heat up the inside of the incubator.

Content:

Link: <https://collegedunia.com/exams/thermal-conductivity-of-copper-properties-testing-methods-application-physics-articleid-941>

Cite:

"Thermal Conductivity of Copper: Properties, Testing Methods, Application," *Collegedunia*, Sep. 23, 2021.

<https://collegedunia.com/exams/thermal-conductivity-of-copper-properties-testing-methods-application-physics-articleid-941> (accessed Jan. 31, 2022).

Notes:

- The thermal conductivity of copper is 400 W/mK
- The coefficient of thermal conductivity of Copper is 385 W/mK
- Copper has a moderate corrosion rate and a high melting point
- Fourier's Law for heat conduction or the law of thermal conduction
- Thermal Conductivity is expressed by $q = -k \cdot \nabla T$

Where

q → Heat flux or thermal flux ($\text{W} \cdot \text{m}^{-2}$)

k → Thermal conductivity ($\text{W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$)

∇T → Temperature gradient ($\text{K} \cdot \text{m}^{-1}$)

Conclusions/action items:

These values for copper will most likely be used to provide some mathematical analysis of the conduction of the heated water pump and hopefully provide a rough estimate of how long it will take the water bed to be heated up to the desired temperature. Next will be to find the same information for water and then compare the values in order to find out how long the bed of water will take to be heated up with various assumptions.



1/31/22 Thermal Conductivity of Water

SAMUEL BARDWELL - Jan 31, 2022, 8:41 PM CST

Title: Thermal Conductivity of Water

Date: 1/31/22

Content by: Sam

Goals: To research thermal conductivity properties of water.

Content:

Link: https://www.engineeringtoolbox.com/water-liquid-gas-thermal-conductivity-temperature-pressure-d_2012.html

Cite:

"Water - Thermal Conductivity vs. Temperature." https://www.engineeringtoolbox.com/water-liquid-gas-thermal-conductivity-temperature-pressure-d_2012.html (accessed Jan. 31, 2022).

Notes:

- **Thermal conductivity** is a material property that describes ability to conduct heat
- The thermal conductivity of water at 20, 30, and 40 degrees Celsius is 598.03, 614.50, and 628.56 mW/m²K

Table 1: Thermal conductivity of water in mW/m²K at different temperatures.

State of water	Temperature	Thermal conductivity		
	[°C]	[mW/m ² K]	[kcal(IT)/(h m K)]	[Btu(IT)/(h ft °F)]
Liquid	0.01	555.75	0.4779	0.3211
	10	578.64	0.4975	0.3343
	20	598.03	0.5142	0.3455
	30	614.50	0.5284	0.3551
	40	628.56	0.5405	0.3632
	50	640.60	0.5508	0.3701
	60	650.91	0.5597	0.3761
	70	659.69	0.5672	0.3812
	80	667.02	0.5735	0.3854
	90	672.88	0.5786	0.3888
	99.6	677.03	0.5821	0.3912

Conclusions/action items:

This table of thermal conductivity of water at different temperatures can be used to help approximate how long it will take a certain amount of water to heat up to a desired temperature using a copper heating element. How to connect the thermal values of copper and water should be researched next and then mathematical calculations can be conducted.



2/2/22 Heat Transfer Calculations

SAMUEL BARDWELL - Feb 15, 2022, 7:48 PM CST

Title: Heat Transfer Calculations

Date: 2/2/22

Content by: Sam

Goals: To provide mathematical analysis and calculations to find out how long it will take to theoretically heat up the water bed inside of the incubator.

Content:

- If copper is heated up to 37 degrees C, what is the exact surface area of copper that will be touching the water bed?

$$SA = 2(\pi)r(h) + 2(\pi)r^2$$

3 ft of copper tubing

$$SA = 2 (\pi) (4.7625) (914.4) = 27362.2 \text{ mm}^2$$

- How many Joules will be produced in heat by the copper if it is set at 37 degrees Celsius?

$$@ 37 \text{ degrees Celsius} = 70,266.7 \text{ J}$$

58.55 minutes to heat from 20 C to 37 C

$$@ 40 \text{ degrees C} = 75,964 \text{ J}$$

$$@ 45 \text{ degrees C} = 85,459.5 \text{ J}$$

$$@ 50 \text{ degrees C} = 94,955 \text{ J}$$

$$@ 55 \text{ degrees C} = 104,450.5 \text{ J}$$

$$@ 60 \text{ degrees C} = 113,946 \text{ J}$$

- What is the exact amount of water in the water bed? How many Watts and/or Joules will it take to heat up a liter of water from 20 to 37 degrees Celsius?

1 liter of water

It will take approximately 20 Watts to heat up 1 liter of water from 20 degree Celsius to 37 degrees Celsius.

Link for water heating calculator: <https://bloglocation.com/art/water-heating-calculator-for-time-energy-power>

- How much heat will the copper absorb/transfer from the 37 degree Celsius water?

$$0.385 \text{ J/g degree C}$$

- How long will it take the copper to heat up the water bed from 20 to 37 degrees Celsius?

$$Q = h * A * (T(t) - T_{env})$$

Q = rate of heat transfer

h = heat transfer coefficient

$A = SA$

$T =$ Time dependent temperature

$T_{env} =$ Environment temperature

Conclusions/action items:



2/22/22 Heat Transfer Calculations Continued

SAMUEL BARDWELL - Feb 22, 2022, 6:06 PM CST

Title: Heat Transfer Calculations Continued

Date: 2/22/22

Content by: Sam

Goals: To use thermal equations and calculations to determine how long it will take the copper tubing to heat up the 1 liter water bed.

Content:

Link: https://en.wikipedia.org/wiki/Copper_in_heat_exchangers#Thermal_conductivity

Cite:

"Copper in heat exchangers," *Wikipedia*. Jan. 27, 2022. Accessed: Feb. 22, 2022. [Online]. Available: https://en.wikipedia.org/w/index.php?title=Copper_in_heat_exchangers&oldid=1068258477

Notes:

Thermal conductivity of some common metals^[6]

Metal	Thermal conductivity	
	(Btu/(hr-ft-F))	(W/(m•K))
Silver	247.87	429
Copper	231	399
Gold	183	316
Aluminium	136	235
Yellow brass	69.33	120
Cast iron	46.33	80.1
Stainless steel	8.1	14.0

Link: <http://www.matweb.com/tools/unitconverter.aspx?fromID=10&fromValue=118>

Cite: "Unit of Measure Converter." <http://www.matweb.com/tools/unitconverter.aspx?fromID=10&fromValue=118> (accessed Feb. 22, 2022).

Notes:

- Useful for unit conversions. Especially for energy conversions

Link: https://www.google.com/search?q=k+of+water&source=lmns&bih=569&biw=1280&rlz=1C1CHBF_enUS985US985&hl=en&sa=X&ved=2ahUKEwies7PF8pP2AhV1hGoFHxiRAkoQ_AUoAHoECAEQAA

q=k+of+water&source=lmns&bih=569&biw=1280&rlz=1C1CHBF_enUS985US985&hl=en&sa=X&ved=2ahUKEwies7PF8pP2AhV1hGoFHxiRAkoQ_AUoAHoECAEQAA

Cite: "Specific heat capacity - Wikipedia." https://en.wikipedia.org/wiki/Specific_heat_capacity (accessed Feb. 22, 2022).

Notes:

- The specific heat of water at 20 °C is about 4184 J·kg⁻¹·K⁻¹

Link: <https://study.com/academy/lesson/heat-transfer-through-conduction-equation-examples.html>

Cite: "Heat Transfer Through Conduction: Equation & Examples - Video & Lesson Transcript," *Study.com*. <https://study.com/academy/lesson/heat-transfer-through-conduction-equation-examples.html> (accessed Feb. 22, 2022).

Notes:

- Helpful equations for heat transfer and conduction

Q/t : The amount of heat transferred per second, measured in Joules per second, or Watts.

k : The thermal conductivity of the material (copper has a thermal conductivity of 390)

$T_2 - T_1$: The temperature difference

d : The thickness of the material

A : Surface Area

$$\frac{Q}{t} = \frac{kA(T_2 - T_1)}{d}$$

Conclusions/action items:

If the heated water pump water is heated up to 50 °C, the water bath will take approximately 7.5 minutes to reach 37 °C by heating through the copper tubing. If the water pump is only set to 37°C, the water bath would take approximately 13 minutes to reach 37°C. The plan is to use the higher temperature initially to get the water bath heated up as fast as possible. Once the water bath is set to the correct temperature, the heated water pump will be set to 38°C to keep the correct internal temperature constant and to account for any heat loss due to the initial tubing from the heated water pump and the acrylic box.



2/24/22 EVOS Onstage Incubator

SAMUEL BARDWELL - Feb 28, 2022, 12:35 PM CST

Title: EVOS Onstage Incubator

Date: 2/24/22

Content by: Sam

Goals: To research other on stage incubator designs to get an hopefully get ideas for improvements to our incubator.

Content:

Link: <https://www.thermofisher.com/order/catalog/product/AMC1000>

Cite: "EVOS™ Onstage Incubator." <https://www.thermofisher.com/order/catalog/product/AMC1000> (accessed Feb. 28, 2022).

Notes:

- Cost is extremely high (\$18,760.00)
- Enables precise temperature, humidity, and three gases for time-lapse imaging
- Internal environment values are easily selected by user input
- Very small design
- Compatible with imaging software
- Minimizes light exposure
- Hold chamber slides, microscopic slides, multi-well plates, and petri dishes



Conclusions/action items:

This stage top design has all of the features that our microscopic cell culture incubator will have. The biggest differences are the sizes, as the EVOS incubator is extremely small to our design, but we incorporate a larger water heating system to our design. The other big difference is the cost of our product compared to the EVOS incubator. Our product will hopefully be under <\$100 production costs while this incubator is over 15,000 dollars. One thing I think we could incorporate to our design based off of the EVOS incubator is to have compatibility with the imaging software used in the BME teaching lab.



1/31/22 Waterproof Insulation Products

SAMUEL BARDWELL - Feb 28, 2022, 12:21 PM CST

Title: Waterproof Insulation Products

Date: 1/31/22

Content by: Sam

Goals: To find possible waterproofing/insulating material to incorporate into the incubator box to prevent leaking and heat loss.

Content:

Link: <https://wtrproof.com/types-of-waterproofing-materials/>

Cite:

L. W, "7 Common Types Of Waterproofing Materials (Benefits, Uses, & Cost)," *Wtrproof*, Oct. 03, 2019. <https://wtrproof.com/types-of-waterproofing-materials/> (accessed Jan. 31, 2022).

Notes:

- There are many types of waterproofing but the material has to be individualized for certain circumstances
- Polyurethane membrane could be an option to use for the inside of the box to seal the edges of the inside of the box. The polyurethane may cause health risks. It is commonly used for water tanks (which can be comparable to our water tank).
- Cementitious coating is an easy waterproofing and insulating option that is made of sand, organic and inorganic chemicals, and silica-based substances. This product is easy application but has little flexibility. There is a spray formula option.
- See rest of the paper for more options (Cementitious and polyurethane were the best options)

Conclusions/action items:

The right waterproofing method will have to be researched more based on the needs of our project. Polyurethane spray foam could be useful to insulate and waterproof the edges of our box but may pose some health risks which could lead to cell death in the incubator from contamination or toxins. Cementitious coating could be a possible final coat on the inside of the box to help seal any tight cracks as well as add waterproofing. More research on specific waterproofing insulation methods should be conducted but the cementitious and polyurethane specifically. Should also research biocompatibility for each.

 **2/2/22 Black Acrylic Research**

Title: Black Acrylic Research

Date: 2/2/22

Content by: Sam

Goals: To get a better understanding of black acrylic and its properties in order to use it for the project.

Content:

Link: https://www.grainger.com/category/raw-materials/plastics/plastic-sheets-bars/acrylic-choose-a-color-sheets-bars?attrs=Color%7CBlack&filters=attrs&gucid=N:N:PS:Paid:MS:CSM-2294:ZQXX1N:20500731&ef_id=0cf5959527bb1e119399f46e1e5abe4c:G:s&s_kwcid=AL!2966!10!78821329009937!2330621053750562&gclid=0cf5959527bb1e119399f46e1e5abe4c&gclid=0cf5959527bb1e119399f46e1e5abe4c&gclid=0cf5959527bb1e119399f46e1e5abe4c

Cite:

“Black Acrylic - Choose-a-Color Sheets & Bars - Grainger Industrial Supply.” https://www.grainger.com/category/raw-materials/plastics/plastic-sheets-bars/acrylic-choose-a-color-sheets-bar-attrs=Color%7CBlack&filters=attrs&gucid=N:N:PS:Paid:MS:CSM-2294:ZQXX1N:20500731&ef_id=0cf5959527bb1e119399f46e1e5abe4c:G:s&s_kwcid=AL!2966!10!78821329009937!2330621053750562&gclid=0cf5959527bb1e119399f46e1e5abe4c&gclid=0cf5959527bb1e119399f46e1e5abe4c&gclid=0cf5959527bb1e119399f46e1e5abe4c (accessed Feb. 02, 2022).

Notes:

General Purpose Acrylic Sheets



These general purpose acrylic sheets are easy to thermoform and bond with solvent cements. These sheets are scratch- and UV-resistant and commonly used for sight gauges, protective covers, frames and display cases, and indoor and outdoor signs.

Tensile Strength Rating: Excellent
Plastic Hardness Rating: Hard

Plastic Thickness	Color	Plastic Clarity	Tensile Strength	Impact Strength	Temperature Range	Item #	Price
12 in W x 12 in L							
0.125 in	Black	Opaque	11,030 psi	0.28 ft-lb/in	32 Degrees to 170 Degrees F	11PA25	\$6.64 / each
0.171875 in	Black	Opaque	11,030 psi	0.28 ft-lb/in	32 Degrees to 170 Degrees F	11PA26	\$8.27 / each
0.234375 in	Black	Opaque	11,030 psi	0.28 ft-lb/in	32 Degrees to 170 Degrees F	11PA27	\$12.23 / each
24 in W x 24 in L							
0.125 in	Black	Opaque	11,030 psi	0.28 ft-lb/in	32 Degrees to 170 Degrees F	11PA28	\$27.99 / each
0.171875 in	Black	Opaque	11,030 psi	0.28 ft-lb/in	32 Degrees to 170 Degrees F	11PA29	\$33.02 / each
0.234375 in	Black	Opaque	11,030 psi	0.28 ft-lb/in	32 Degrees to 170 Degrees F	11PA31	\$48.86 / each
24 in W x 48 in L							
0.125 in	Black	Opaque	11,030 psi	0.28 ft-lb/in	32 Degrees to 170 Degrees F	11PA42	\$48.86 / each
0.171875 in	Black	Opaque	11,030 psi	0.28 ft-lb/in	32 Degrees to 170 Degrees F	11PA43	\$60.95 / each

Top

General Purpose Cast Acrylic Sheets



These cast acrylic sheets are clear and resemble glass in clarity, brilliance, and transparency, but are half the weight. They are easier to machine than extruded acrylic and are scratch- and UV-resistant. They are commonly fabricated into tanks, see-through barrier panels, and light fixture lenses.

Tensile Strength Rating: Good-Excellent
 Impact Strength Rating: Poor
 Plastic Hardness Rating: Hard
 UV Tolerant: Yes

Plastic Thickness	Color	Plastic Clarity	Tensile Strength	Impact Strength	Temperature Range	Item #	Price
12 in W x 12 in L							
0.125 in	Black	Opaque	9,000 psi	0.3 ft-lb/in	40 Degrees to 190 Degrees F	60A259	\$10.41 / each
0.1875 in	Black	Opaque	9,000 psi	0.3 ft-lb/in	40 Degrees to 190 Degrees F	60A260	\$12.95 / each
0.25 in	Black	Opaque	9,000 psi	0.3 ft-lb/in	40 Degrees to 190 Degrees F	60A261	\$15.68 / each
12 in W x 24 in L							
0.125 in	Black	Opaque	9,000 psi	0.3 ft-lb/in	40 Degrees to 190 Degrees F	60A262	\$15.93 / each
0.1875 in	Black	Opaque	9,000 psi	0.3 ft-lb/in	40 Degrees to 190 Degrees F	60A263	\$21.00 / each
0.25 in	Black	Opaque	9,000 psi	0.3 ft-lb/in	40 Degrees to 190 Degrees F	60A264	\$26.55 / each

Figure 1: Information on the Grainger website about black acrylic sheets with different dimension, prices, and transparency.

Makerspace:

Table 1: List of some approved materials to use on the laser cutter at the UW Makerspace

Material Name	Category	Safe for Raster?	Safe for Vector Engraving?	Safe for Vector Cut?	Notes
100% Cotton	Fabrics	Yes	Yes	Yes	
100% Silk	Fabrics	Yes	Yes	Yes	
100% Wool	Fabrics	Yes	Yes	Yes	Wool felt is safe to cut but has a bad odor. Please bag all scraps and cut pieces immediately after cutting.
3M Chroma	No settings currently	Yes	Yes	Yes	
Acrylic	Plastics	Yes	Yes	Yes	For sale in Makerspace
Anodized Aluminum	Other	Yes	Yes	NO	
Balsa Wood	Woods	Yes	Yes	Yes	
Basswood	Woods	Yes	Yes	Yes	Do not cut out non-planar (warped) material.
Ceramic	Other	Yes	Yes	NO	

Conclusions/action items:

I can come back to this page when we begin looking to order materials if we decide to continue with the black acrylic. One reason I believe we will continue with it is because the UW Makerspace is fairly cheap. Some future work is to research possible adhesives for this acrylic as well as how to laser cut the box in order to merge the walls together.



3/23/22 Threaded to Barb Tube Adaptors

SAMUEL BARDWELL - Mar 24, 2022, 11:58 AM CDT

Title: Threaded to Barb Tube Adaptors

Date: 3/23/22

Content by: Sam

Goals: To research possible adaptors for the incubator tubing.

Content:

Link: <https://www.grainger.com/product/ELDON-JAMES-Barbed-x-MNPT-Adapter-1ZJX1>

ELDON JAMES
Barbed x MNPT Male Adapter, Polypropylene, 1/2 in Barb Size, White

Item # **1ZJX1** Mfr. Model # **A6-BWP**
 UNSPSC # **40142613** Catalog Page # **N/A**

Country of Origin USA. Country of Origin is subject to change.

Precision-molded plastic barbed adapters are designed to help provide outstanding leak prevention. The antirotation devices help prevent tube stress and wear.

Compare this product

Web Price **\$10.30** / pkg. of 10

Qty: **Add to Cart**

Ship Pickup

Expected to arrive **Thu, Mar 24**
 Ship to **53701** | [Change](#)

Shipping Weight **0.08 lbs**
[Ship Availability Terms](#)

Conclusions/action items:

This adaptor may become useful when we start fabricating the tubing of the incubator box.



3/23/22 Latch Clamp Research

Title: Latch Clamp Research

Date: 3/23/22

Content by: Sam

Goals: To find latches that will function with the dimensions of our box.

Content:

Link: https://www.amazon.com/Rannb-Toggle-Stainless-Catches-Toolbox/dp/B07HD246X2/ref=sr_1_29_sspa?crd=XACVOVSEY26R&keywords=small%2Blatch%2Bclamps&qid=1648078071spons&spLa=ZW5jcmlwdGVkUXVhbGlnaWVyPUExTUczVk1TTTdOQ1E1JmVuY3J5cHRIZEikPUEwMDlwODAxMU5EOE5SN09RNk11TiZlbnNyeXB0ZWZlbnRkPUEwMDQxODAxMjVBNRk9



Rannb Spring Toggle Latch Mini Size Toolbox Latch 44mm/1.73" Length - Pack of 10

Brand: Rannb
★★★★☆ 319 ratings

Best Seller

-14% \$11.99

Was: \$14.99

Get Fast, Free Shipping with Amazon Prime & FREE Returns

Save \$2 with coupon. Terms

Get \$60 off instantly: Pay \$0.00 \$11.99 upon approval for the Amazon Prime Store Card. No annual fee.

Size Name: 44mm/1.73" 10pcs

Roll over image to zoom in



- Latch body is 30 mm and the side of our box is 36 mm tall. The size of the box with the lid is 42 mm. These latches should be able to fit on our box.

Conclusions/action items:

Order the latches so that we are capable of have the latch box design.



2/6/22 SOLIDWORKS to Laser Cutter Information

SAMUEL BARDWELL - Feb 06, 2022, 3:16 PM CST

Title: SOLIDWORKS to Laser Cutter Information

Date: 2/6/22

Content by: Sam

Goals: To understand how to convert a SOLIDWORKS file to a file that can be exported to the laser cutter.

Content:

Link: <https://docs.google.com/document/d/e/2PACX-1vThkII0GJMtvIAQUHwelMMVX1YcFU06ftMu8NdYquHfHzA7ZaJ27pNdeIKNsmFSgfX801T0b9ysJgng/pub>

Notes:

- The link shows step by step on how to convert a SOLIDWORKS part to the Laser cutter in the Makerspace
- Provided by UW Madison Makerspace

Conclusions/action items:

I will come back to this link when I have update the SOLIDWORKS parts to the best of their ability and when we want to laser cut the parts if we decide to continue down that route.

SAMUEL BARDWELL - Feb 06, 2022, 3:16 PM CST



[Download](#)

Solidworks_to_Universal_Laser.mhtml (1.6 MB)



2/6/22 Automatic Box Generator for the Laser Cutter

SAMUEL BARDWELL - Feb 06, 2022, 3:31 PM CST

Title: Automatic Box Generator for the Laser Cutter

Date: 2/6/22

Content by: Sam

Goals: To have a resource that helps create a box on the laser cutter without having to use fasteners.

Content:

Link: <https://www.makercase.com/#/>

Notes:

- This link allows you to automatically generate a box that can be laser cut on the laser cutter at the Makerspace
- The dimensions can be set to the desired dimensions that you want in mm or inches
- The link also allows edge joints to be automatically generated and the sizes change so fasteners do not have to be used
- May not be compatible with SOLIDWORKS to add any other features to the box

Conclusions/action items:

I may use this automatic box generator to help visualize how the edge joints can be implemented into our box design. I do not know if this link can help us include the smaller feature of our box which makes the SOLIDWORKS drawings a little more complicated but it is still a good link to be aware of.



2/14/22 SOLIDWORKS Design Matrix Drawings

SAMUEL BARDWELL - Feb 14, 2022, 7:20 PM CST

Title: SOLIDWORKS Design Matrix Drawings

Date: 2/14/22

Content by: Sam

Goals: To draw preliminary designs of the boxes for the design matrix.

Content:

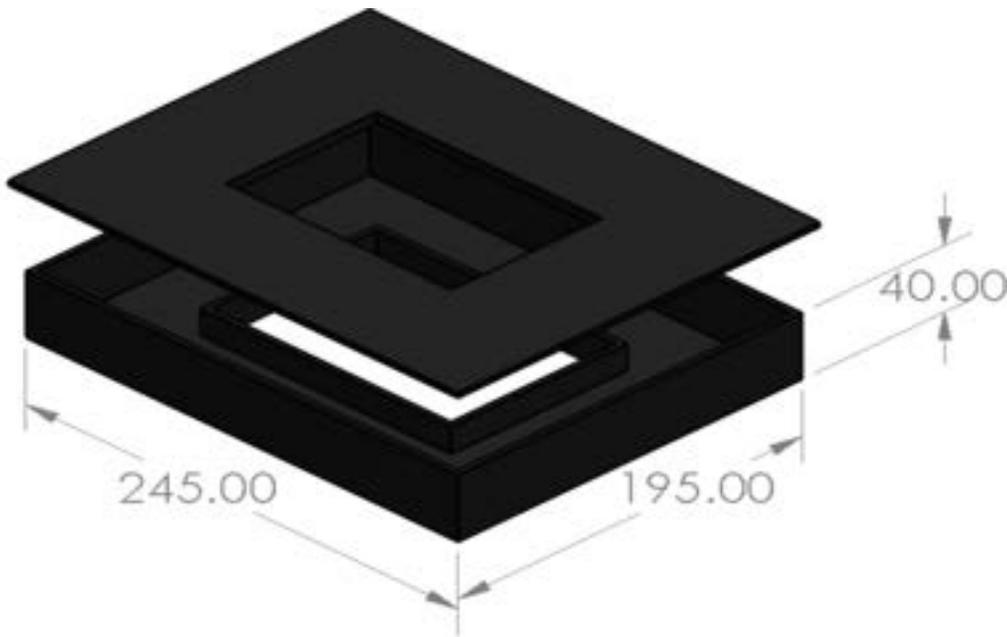


Figure 1: Hinge Top Acrylic Incubator drawing with dimensions in millimeters.

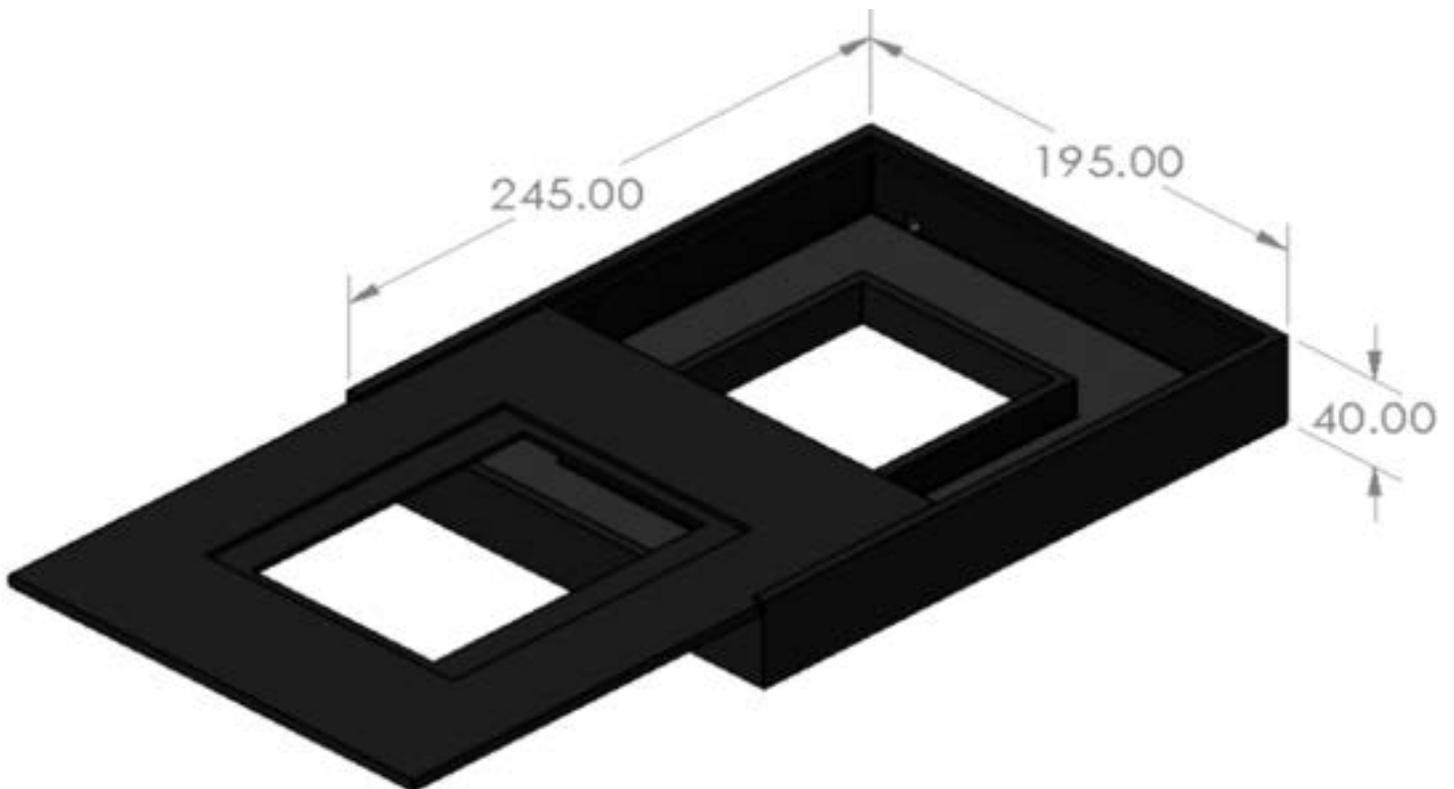


Figure 2: Slide Top Acrylic Incubator drawing with dimensions in millimeters.

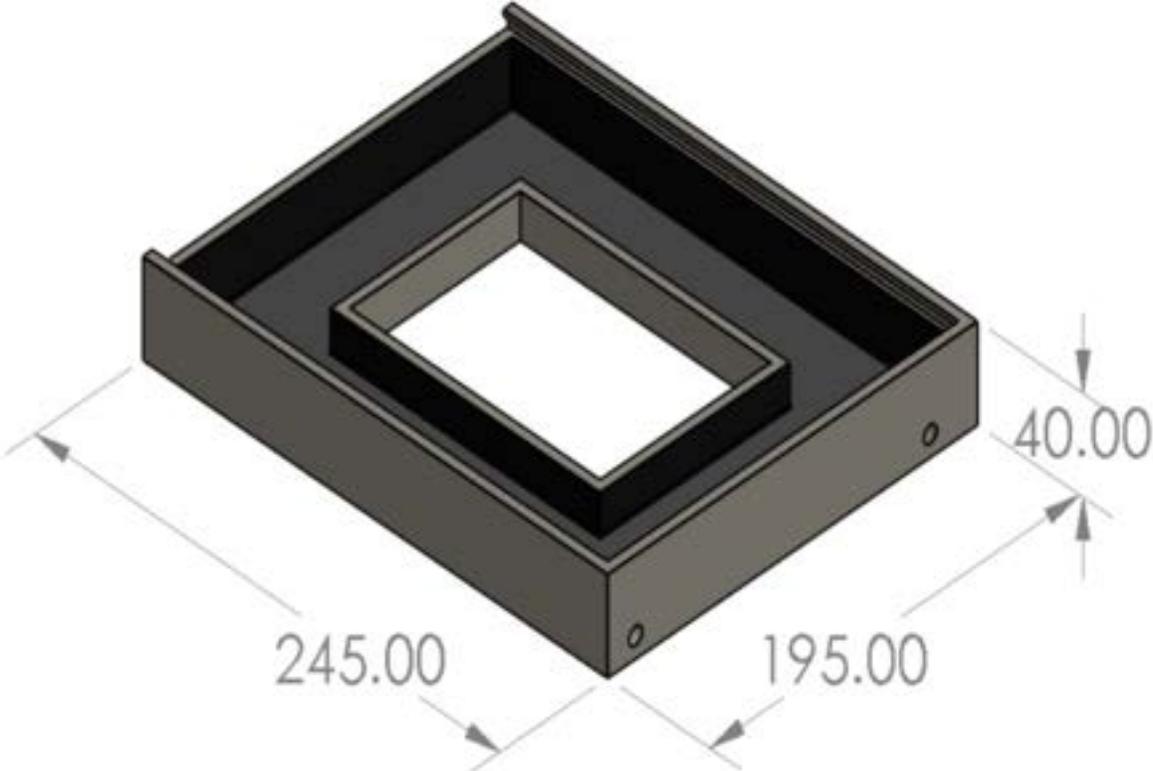


Figure 3: 3D Printed Box with insulation coating drawing with dimensions in millimeters.

Conclusions/action items:

These preliminary drawings will be used for the design matrix for the different box designs. The winning drawing will be updated after scoring is conducted.



2/23/22 SOLIDWORKS Drawing with Fingered Edges

SAMUEL BARDWELL - Feb 27, 2022, 2:19 PM CST

Title: SOLIDWORKS Drawing with Fingered Edges

Date: 2/23/22

Content by: Sam

Goals: To create a SOLIDWORKS drawing that can be cut 2-dimensionally on the laser cutter with fingered edges.

Content:

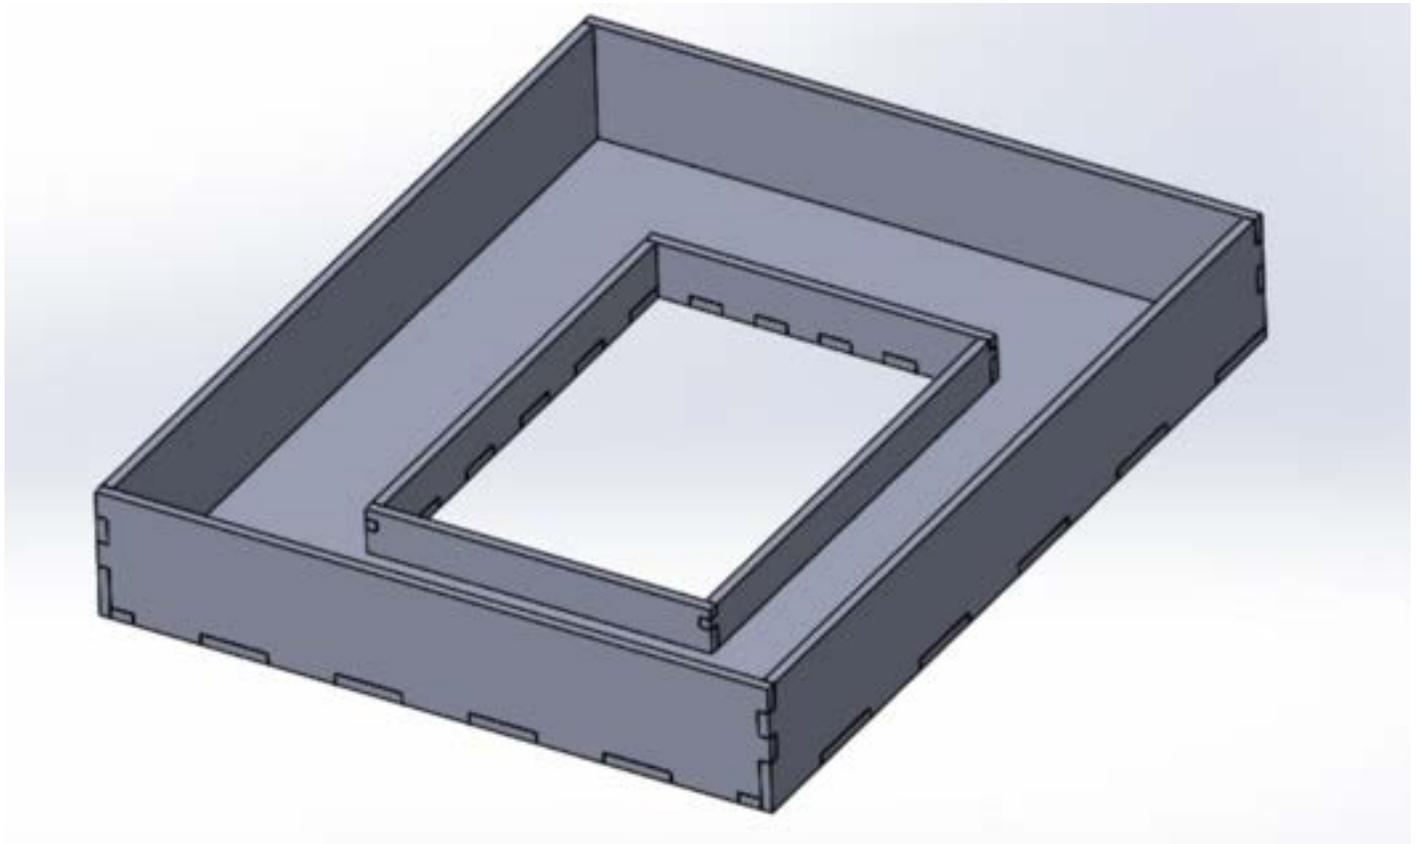


Figure 1: Acrylic hinge top SOLIDWORKS drawing with fingered edges.

Conclusions/action items:

We will use this preliminary assembly to print a cardboard prototype of the incubator box. This is a fluid drawing and assembly and can be updated throughout the semester.



3/8/22 Handwritten Drawing of CO2 Input Controller

SAMUEL BARDWELL - Mar 08, 2022, 8:26 PM CST

Title: Handwritten Drawing of CO2 Input Controller

Date: 3/8/22

Content by: Sam

Goals: To have a preliminary handwritten design of a possible CO2 regulator.

Content:

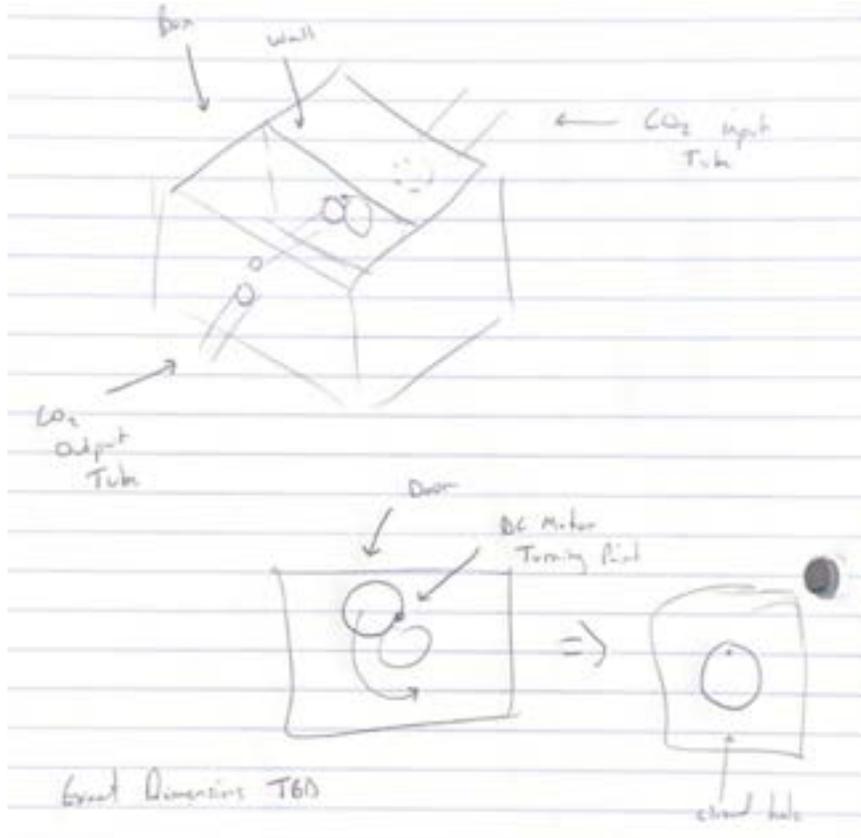


Figure 1: Hand written drawing of possible CO2 monitor for the CO2 input

- Would be 3D printed box of PLA with an inner wall
- There would be a hole in the inner wall that would have a lid attached to a DC motor
- When the CO2 sensor readings got too low, the door would be opened to let CO2 inside the incubator

Conclusions/action items:

Would have to create SOLIDWORKS drawing of the box. Would have to figure out how to connect CO2 tubing. Would have to figure out best way to configure DC motor. Would have to make sure the door can withstand 14 PSI for an extended period of time.



3/22/22 Updated Solidworks Drawing for Laser Cutter

SAMUEL BARDWELL - Mar 22, 2022, 9:30 PM CDT

Title: Updated SOLIDWORKS drawing for Laser Cutter

Date: 3/22/22

Content by: Sam

Goals: To prepare a final SOLIDWORKS drawing for the laser cutter.

Content:

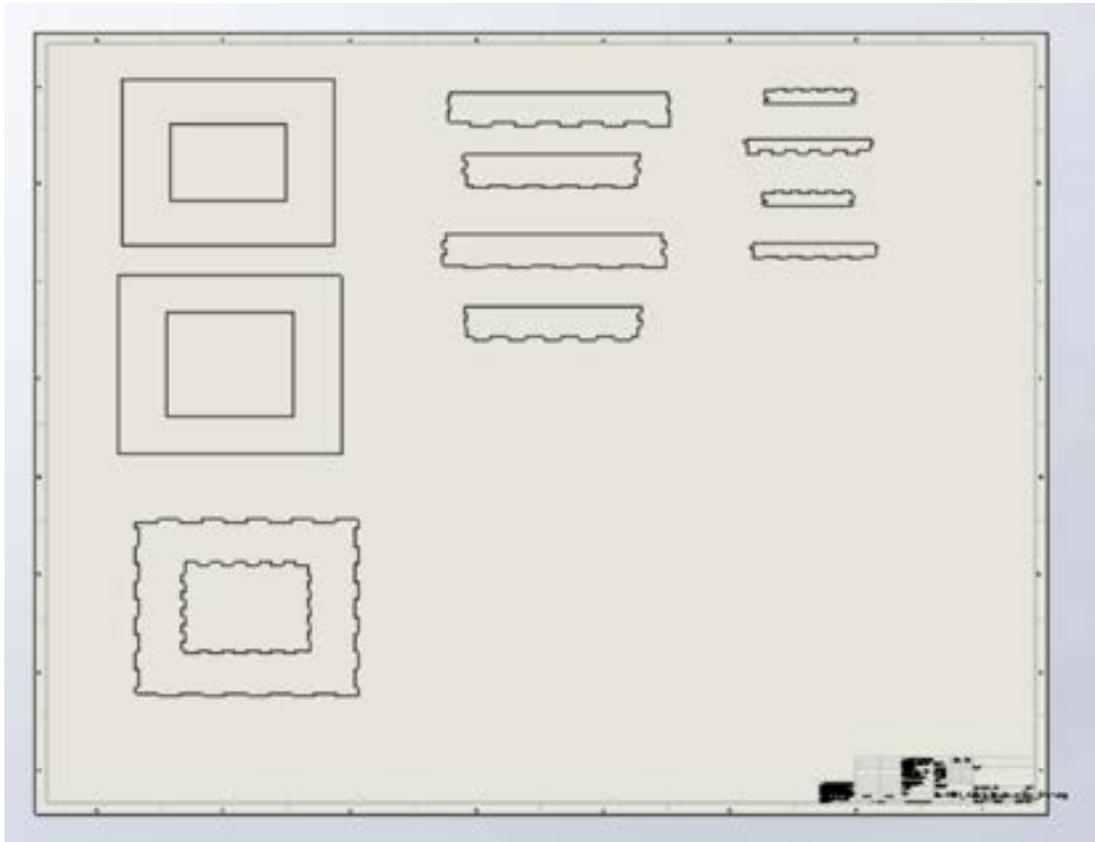


Figure 1: SOLIDWORKS drawing that was converted to ADOBE Illustrator files in order to be printed on the laser cutter

- Files conversions went smoothly
- Little bit of trouble converting ADOBE file to laser cutter language but we figured it out

Conclusions/action items:

Will update this drawing when the final design for the acrylic box is made. Need to include holes for inputs and sensors.



3/22/22 Laser Cut Prototype

SAMUEL BARDWELL - Mar 22, 2022, 9:20 PM CDT

Title: Laser Cut Prototype

Date: 3/22/22

Content by: Sam

Goals: To show progress on the design idea of the acrylic box.

Content:

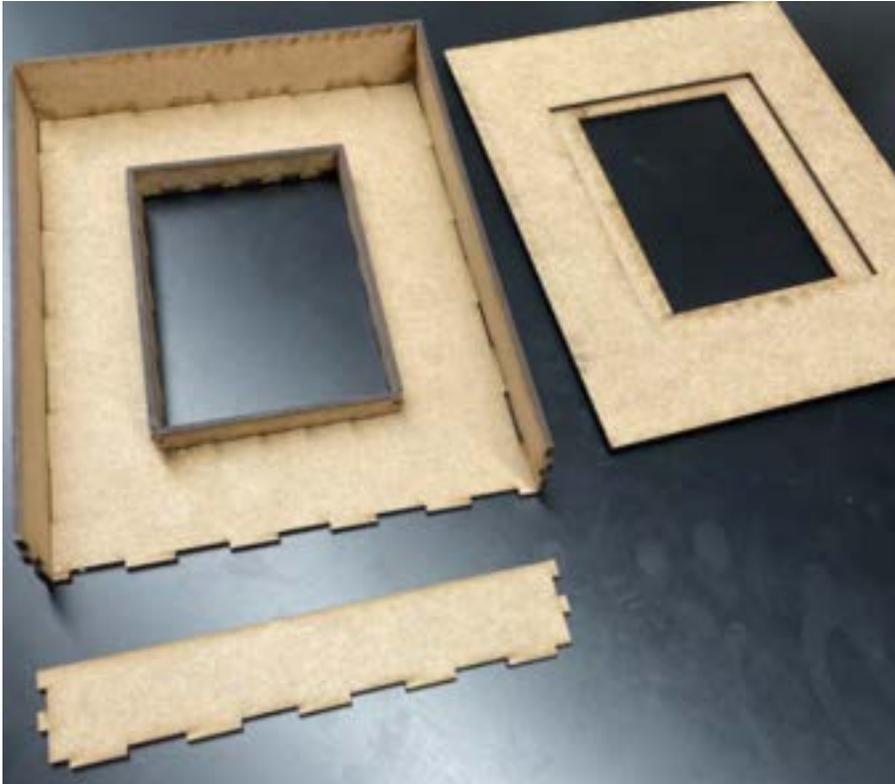


Figure 1: Photo of the laser cut HDF showing the parts being not completely assembled

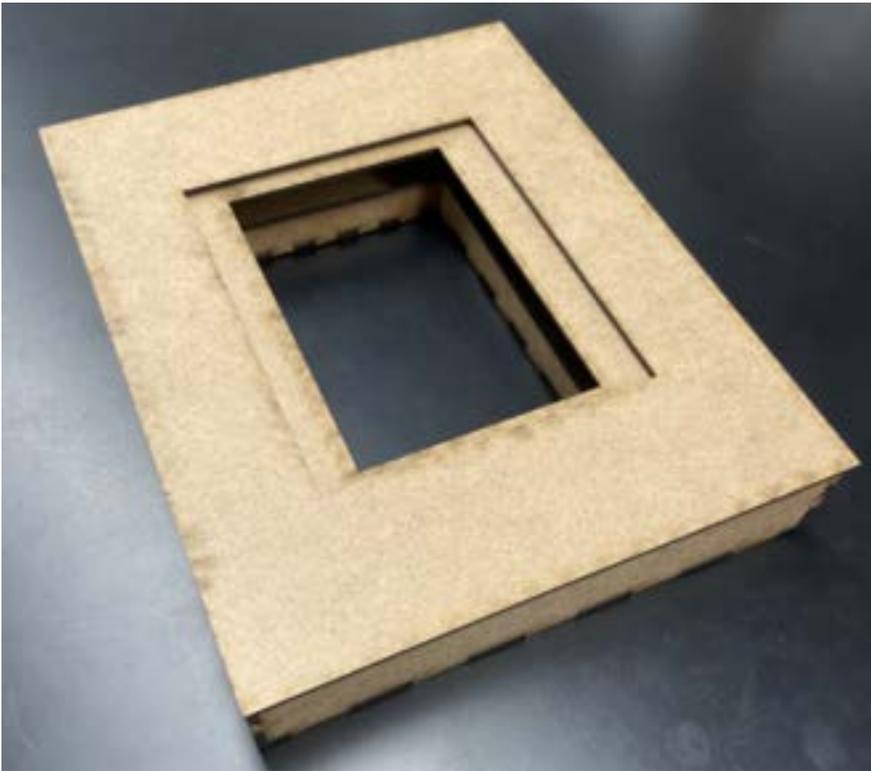


Figure 2: Photo of the laser cut HDF prototype with all the pieces assembled together.

- Box fit very well together
- We were able to figure out the correct setting for the laser cutter and we are ready to laser cut the acrylic sheet when the time comes
- We will have to use either hot glue and the acrylic cement in order to seal all the holes of the acrylic when its fabricated. This is because the HDF had a lot of holes and close to perfect but not perfect fits with the fingers.

Conclusions/action items:

Continue to update the SOLIDWORKS drawing to incorporate holes in the box for sensors and CO₂/Water inputs. Laser cut the drawing on acrylic to fabricate the box and begin other testing.



4/6/22 Acrylic Laser Cut SOLIDWORKS and Drawing

SAMUEL BARDWELL - Apr 06, 2022, 6:29 PM CDT

Title: Acrylic Laser Cut SOLIDWORKS and Drawing

Date: 4/6/22

Content by: Sam

Goals: To update the SOLIDWORKS drawing to incorporate entry holes for the inputs and sensors.

Content:

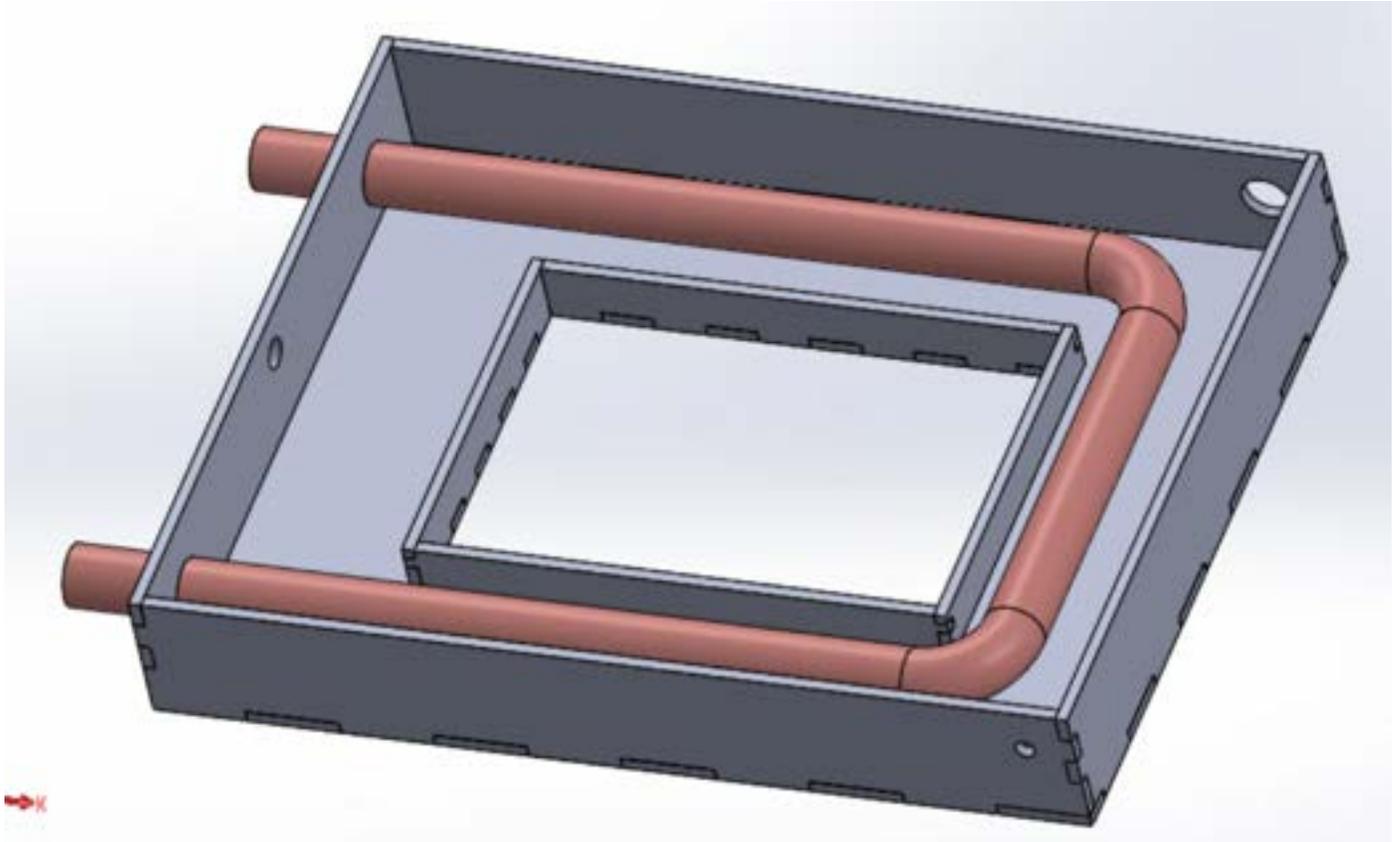


Figure 1: SOLIDWORKS drawing without the lid on the updated assembly.

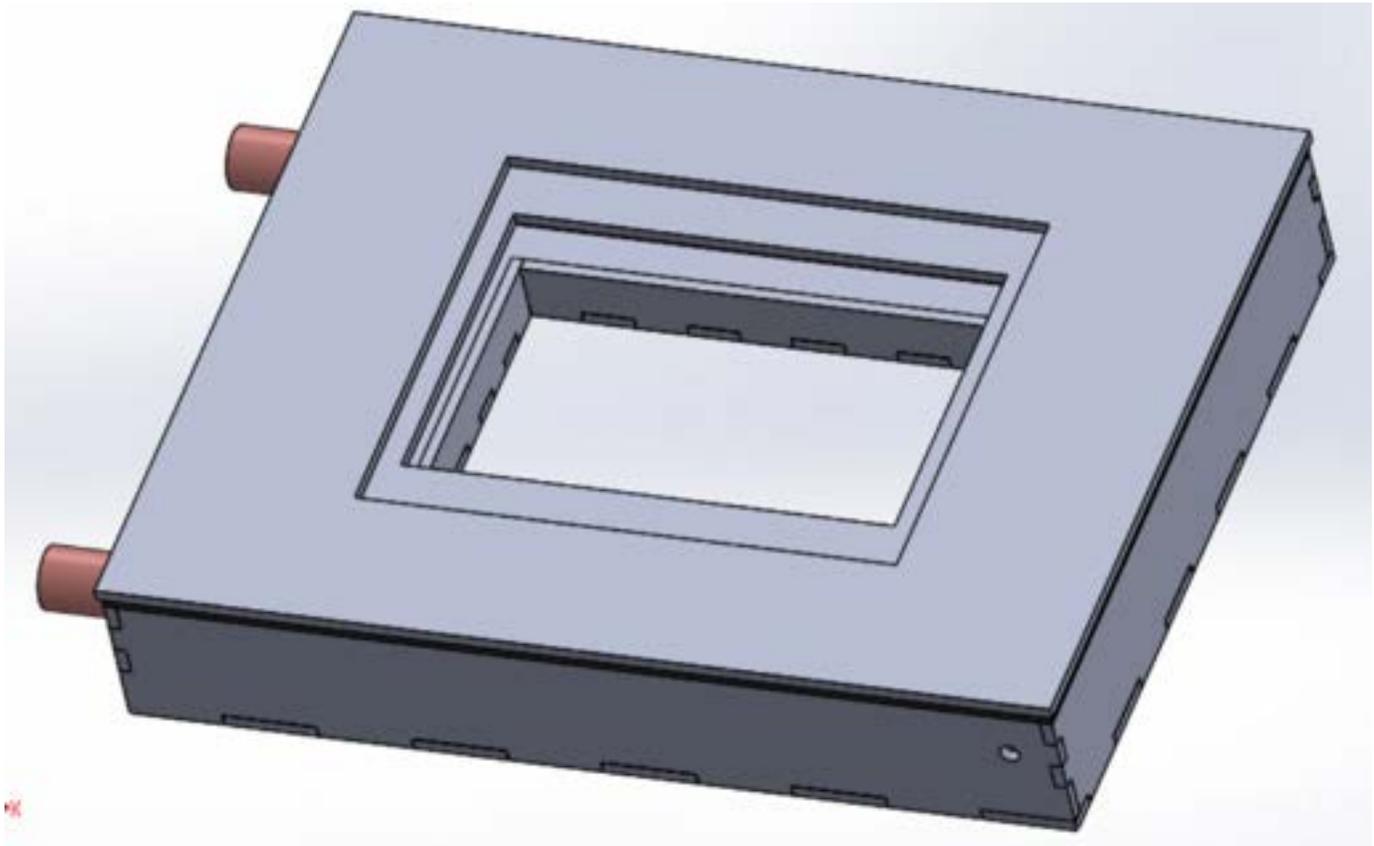


Figure 2: Updated SOLIDWORKS assembly with the lid on top.

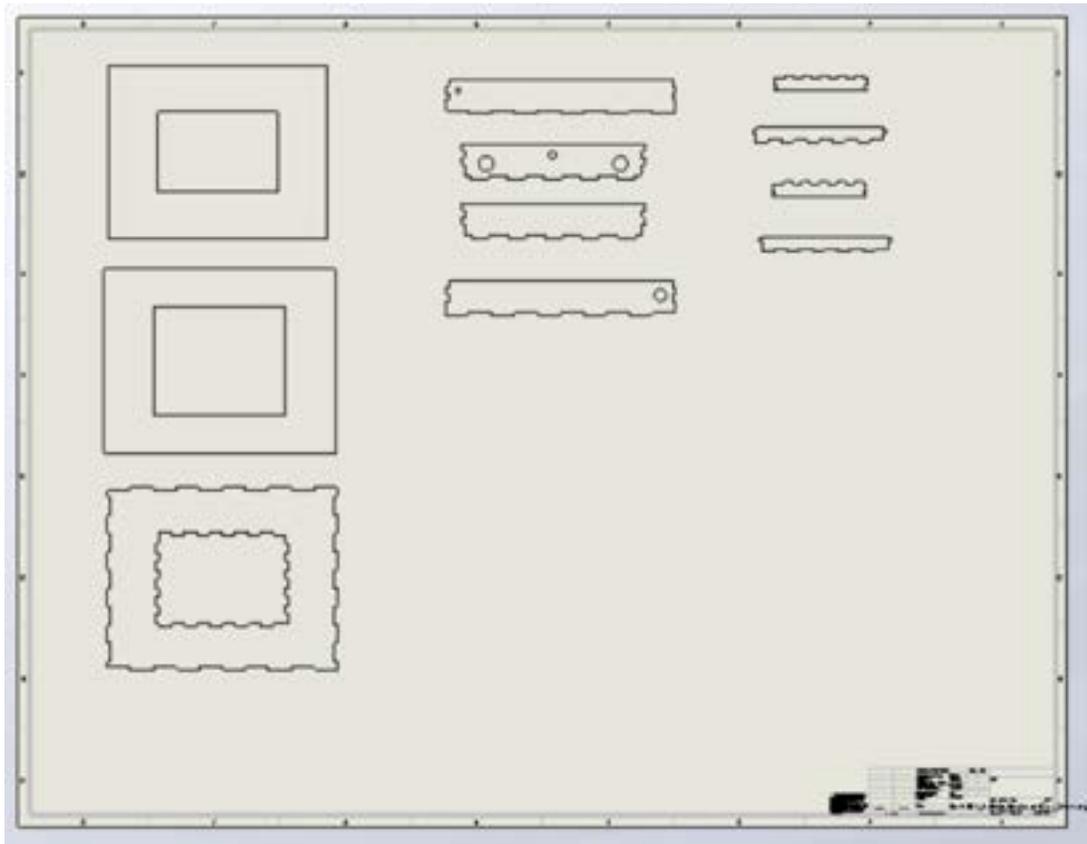


Figure 3: SOLIDWORKS drawing ready to be cut by the laser cutter with acrylic.

Conclusions/action items:

We will use these assemblies and drawing to laser cut the acrylic box so we can continue forward with the incubator and start conducting testing involving the entire box.



2/8/2020 Woodworking 1

SAMUEL BARDWELL - Sep 29, 2020, 11:55 AM CDT

Title: Woodworking Red Permit 1

Date: 9/29/2020

Content by: Sam

Content:

 Image preview

 Image preview



2/8/21 Biosafety Certification

SAMUEL BARDWELL - Feb 08, 2021, 5:19 PM CST

Title: Biosafety Certification

Date: 2/8/21

Content by: Sam

Goals: To be certified to work with biomaterials.

Content:

University of Wisconsin-Madison

This certifies that SAMUEL BARDWELL has completed training for the following course(s):

Course Name	Curriculum or Quiz Name	Completion Date	Expiration Date
BIOSAFETY REQUIRED TRAINING	BIOSAFETY REQUIRED TRAINING QUIZ	2/4/2021	

Data Effective: Thu Feb 4 13:40:00 2021
Report Generated: Mon Feb 8 17:06:55 2021

Conclusions/action items:

This will be useful for this semester and future semesters in Biomedical Engineering. It allows me to safely work with biomaterials.

**3/12/21 Chemical Safety Certification**

SAMUEL BARDWELL - Mar 12, 2021, 3:42 PM CST

Title: Chemical Safety Certification**Date:** 3/12/21**Content by:** Sam**Goals:** To be safe while using chemicals.**Content:**

University of Wisconsin-Madison

This certifies that SAMUEL BARDWELL has completed training for the following course(s):

Course Name	Curriculum or Quiz Name	Completion Date	Expiration Date
BIOSAFETY REQUIRED TRAINING	BIOSAFETY REQUIRED TRAINING QUIZ	2/4/2021	
CHEMICAL SAFETY: THE OSHA LAB STANDARD	FINAL QUIZ	3/4/2021	

Data Effective: Thu Mar 4 11:25:00 2021

Report Generated: Fri Mar 12 15:37:01 2021

Conclusions/action items:

Can be used for BME 201 project as well as future classes in BME or at UW Madison



10/28/21 Green Permit

SAMUEL BARDWELL - Oct 28, 2021, 8:12 AM CDT

Title: Green Permit

Date: 10/28/21

Content by: Sam

Goals: To obtain a green permit to utilize if necessary.

Content:

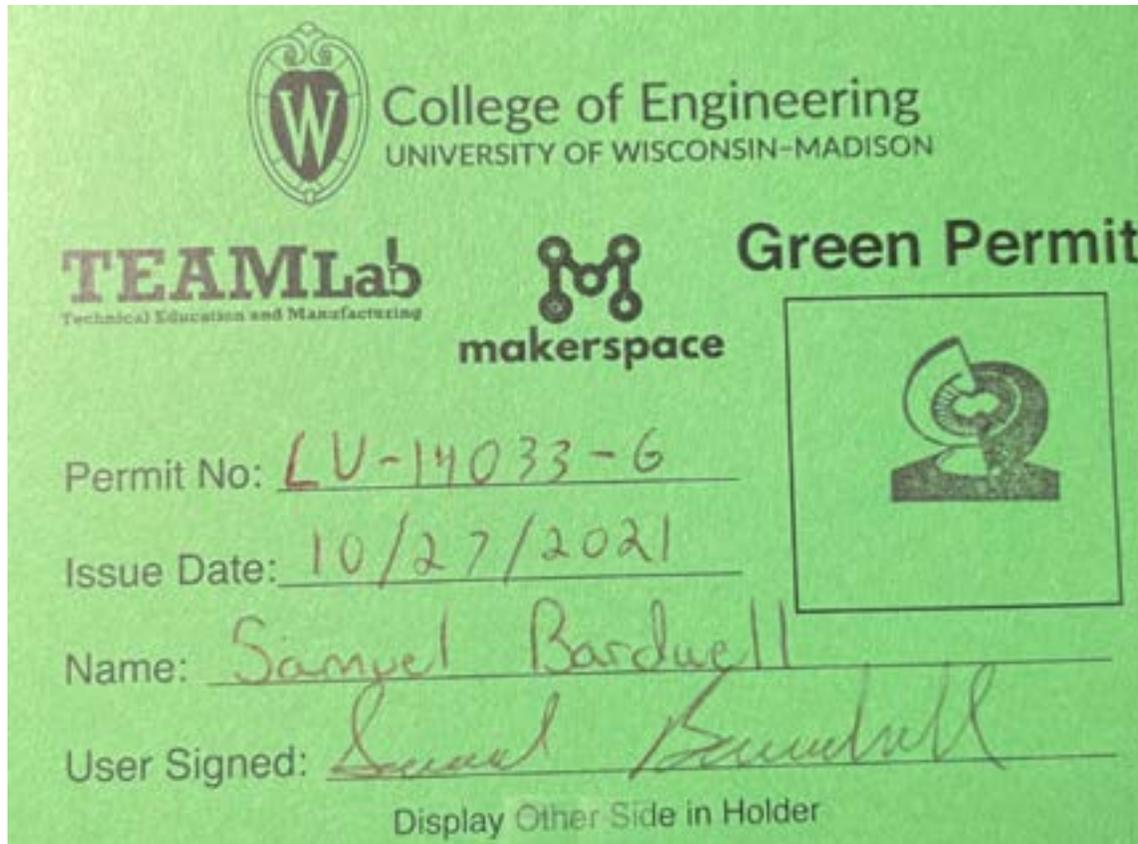


Figure 1: Front side of the green permit

TEAMLab Green Shop Permit Makerspace

Name: Samuel Bardwell

Woodworking 1:  Woodworking2: Woodworking3:

Welding1: Welding 2: Welding 3:

CNC Mill 1: CNC Mill 2: CNC Mill 3: CNC Mill 4:

CNC Lathe 1: CNC Lathe 2: Haas1: Laser1:

Ironworker 1: Coldsaw1: CNC Router 1: CNC Plasma1:

Figure 2: Back side of green permit

Conclusions/action items:

This green permit will be used if necessary for BME design projects.



2/4/22 Laser Cutter Permit

SAMUEL BARDWELL - Feb 04, 2022, 4:07 PM CST

Title: Laser Cutter Permit

Date: 2/4/22

Content by: Sam

Goals: To obtain a laser cutting permit in order to use the laser cutter for BME Design projects.

Content:

TEAMLab Green Shop Permit Makerspace

Name: Samuel Bardwell

Woodworking 1: Woodworking2: Woodworking3:

Welding1: Welding 2: Welding 3:

CNC Mill 1: CNC Mill 2: CNC Mill 3: CNC Mill 4:

CNC Lathe 1: CNC Lathe 2: Haas1: Laser1:

Ironworker 1: Coldsaw1: CNC Router 1: CNC Plasma1:

Conclusions/action items:

I will use this permit to laser cut prototypes and final designs for BME or individual projects.



3/13/22 WARF Presentation Notes

SAMUEL BARDWELL - Mar 13, 2022, 8:03 PM CDT

Title: WARF Presentation Notes

Date: 3/13/22

Content by: Sam

Goals: To understand how WARF can help me with my career in the future.

Content:

WARF

Beginnings

- Created in 1925 to manage intellectual property
- Organized as a nonprofit, functionally integrated supporting organization
- Proceed support research at UW - Madison
- Governed by Independent board of UW-Madison alumni

Vision

- Enable UW-Madison research to solve the world's problems

Mission

- Support scientific research within UW - Madison by providing financial support

Cycle of Innovation

- 200 Issued US Patents
- Annual grant is \$85 million in 2018
- > \$200 M in inventor royalties

Protecting Innovation

- Patents/Copyrights/Trademarks

Prior Art

- Definition: "references" created before a specific date
- By the inventor: > 1 year before the filing date of the patent application
- By another: before the filing date of the patent application

Public Disclosure and Prior Art

Example of typical public disclosures of an invention

- Journal Publication
- Talk or poster at a conference / professional meeting
- Non-confidential department seminar
- Open thesis defense

Requirements for patentability

- Eligibility
- Useful

- Enabled
- Described
- Novel
- Non-obvious

Examination = assessment of the invention

Based on statutory requirements and application of prior art

WARF Management Process

- Disclosure of invention to WARF
- Disclosure committee meets monthly to review new disclosures
- Patent application drafting, filing, and prosecution
- Technology Marketing
- Licensing

Licensing Considerations for New Disclosures

- Chance of licensing
- Timeline for licensing
- Licensing strategy
- Plan for the next year
- Revenue projections

Licensing

- Exclusive or non-exclusive rights to make, use, sell, or import

Licensee Provides

- Develop and commercialize
- Reasonable fees
- Fulfill obligation under Bayh-Dole

Timeline

- Varies from months to years
- Depends on technology

Accelerator Program

- Accelerate commercialization prospects for WARF IP
- Expert consultants with significant business experience

Finding a Licensee

- Internal

Inventor contacts

Meetings

Sponsored research

- External

Technology descriptions of website

Publications

Technology portals

Targeted research

Starting a Company

- Technology
- Market
- Management
- Capital requirements

Start-up Resources

- Discovery to Product, a campus-wide resource for entrepreneurship
- Innovation Roadmap series and UpStart programs
- Law and Business

BME Design Project Startup

- Atrility Medical

Conclusions/action items:

Our design might have intellectual property because we are developing a very low cost microscopic incubator that can be assembled with Lab materials. People are capable of buying microscopically compatible incubators but they are already preassembled and cost a minimum of \$400, while ours can be self-assembled and fairly easily made with cost at ~\$100.



2/3/22 Progress Report 1

SAMUEL BARDWELL - Feb 02, 2022, 8:04 PM CST

Title: Sam's Progress Report 1

Date: 2/3/22

Content by: Sam

Goals: To show my weekly progress and contributions to the project.

Content:

Progress:

- Conducted research on thermal properties for copper and water in order to start making mathematical calculations on heating the incubator water bed
- Conducted research on possible insulation techniques for the inside of the incubation box
- Met with the client in order to discuss any changes or parts to keep working on this semester.

Conclusions/action items:

I will use this research and client meeting information to continue to improve the project. Some individual goals for this semester are to improve the SOLIDWORKS drawings in order for the box to be laser cut. Create mathematical analysis on the thermal properties for the incubator box. Research more about the possible acrylic walls for the box.



2/10/22 Progress Report 2

SAMUEL BARDWELL - Feb 13, 2022, 4:35 PM CST

Title: Sam's Progress Report 2

Date: 2/10/22

Content by: Sam

Goals: To show my weekly progress and contributions to the project.

Content:

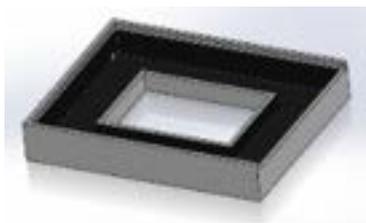
- Continued to do more research on thermal properties between water and copper (See Sam Bardwell > Research Notes > Biology/Physiology/Chemistry > 2/2/22 Heat Transfer Calculations

- Got certified to use the laser cutter in the Makerspace.



- Used Makerspace resources to begin developing drawings of a laser cut box. Sam Bardwell > Design Ideas > 2/6/22 SOLIDWORKS to Laser Cutter and 2/6/22 Automatic Box Generator

- Began to create SOLIDWORKS drawings.



Conclusions/action items:

Finish SOLIDWORKS drawings for the design matrix next week. Finish mathematical calculations for theoretical thermal heating. Begin to find links to materials we want to order.



2/17/22 Progress Report 3

SAMUEL BARDWELL - Feb 21, 2022, 6:26 PM CST

Title: Progress Report 3

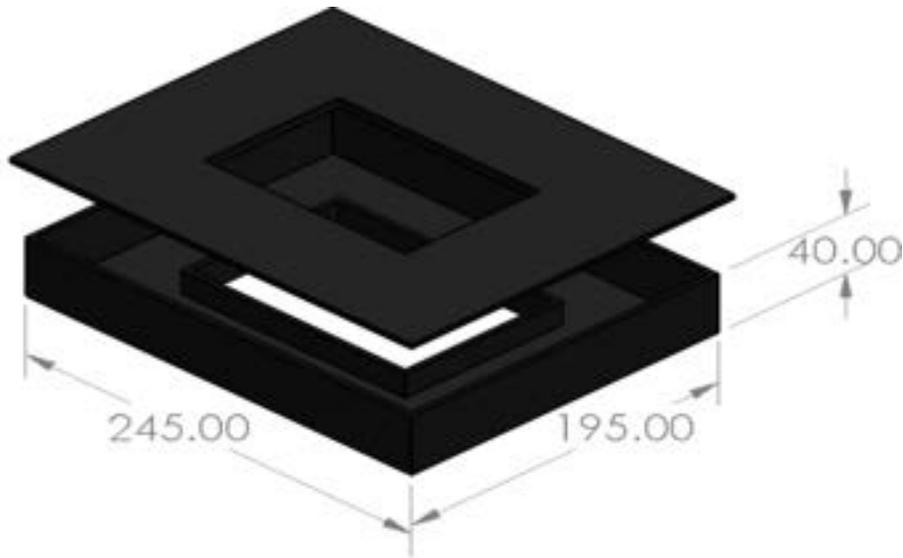
Date: 2/17/22

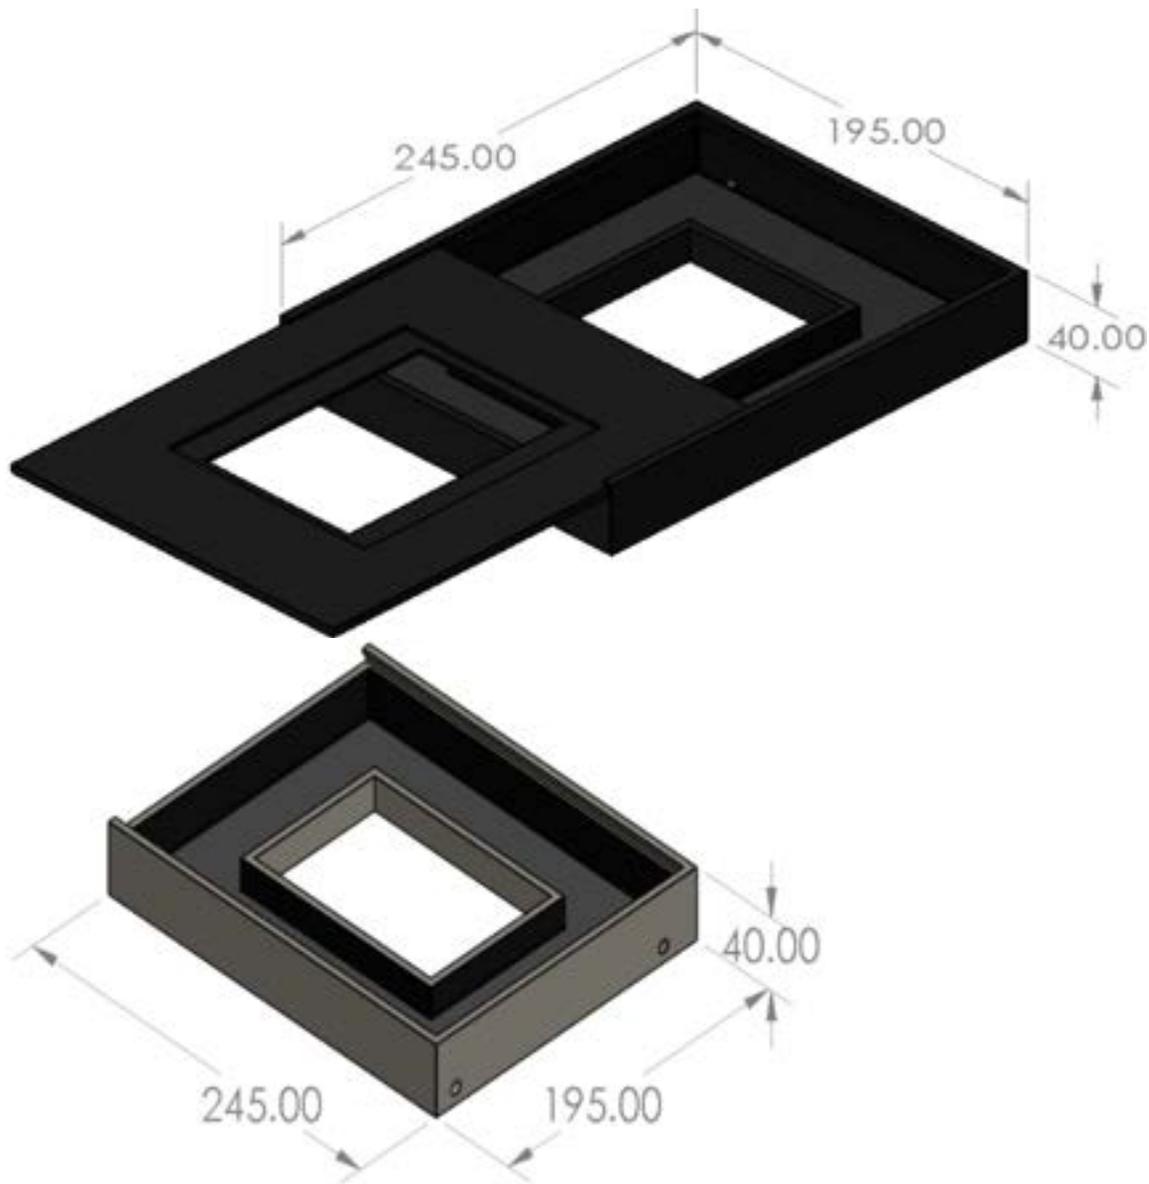
Content by: Sam

Goals: To show my weekly progress and contributions to the project.

Content:

- Created SOLIDWORKS drawings with dimensions for the design matrices





- Contributed to the rankings within the design matrices

See design matrices in the Design Process folder of Team Activities

- Conducted research on thermal properties to develop engineering reasoning as to why one tubing arrangement is better than another.

See 2/2/22 Heat Transfer Calculations

Conclusions/action items:

Continue to research the physics of thermal properties within the incubator to maximize the heat transfer. Finding the correct equations and values to use, as well as converting different values is proving to be a little more difficult than expected. Continue to update SOLIDWORKS drawings in order to have files ready to be sent to the laser cutter for prototyping. The most challenging aspect of this is having the slots to glue the acrylic slabs together.



2/24/22 Progress Report 4

SAMUEL BARDWELL - Mar 02, 2022, 12:48 PM CST

Title: Progress Report 4

Date: 2/24/22

Content by: Sam

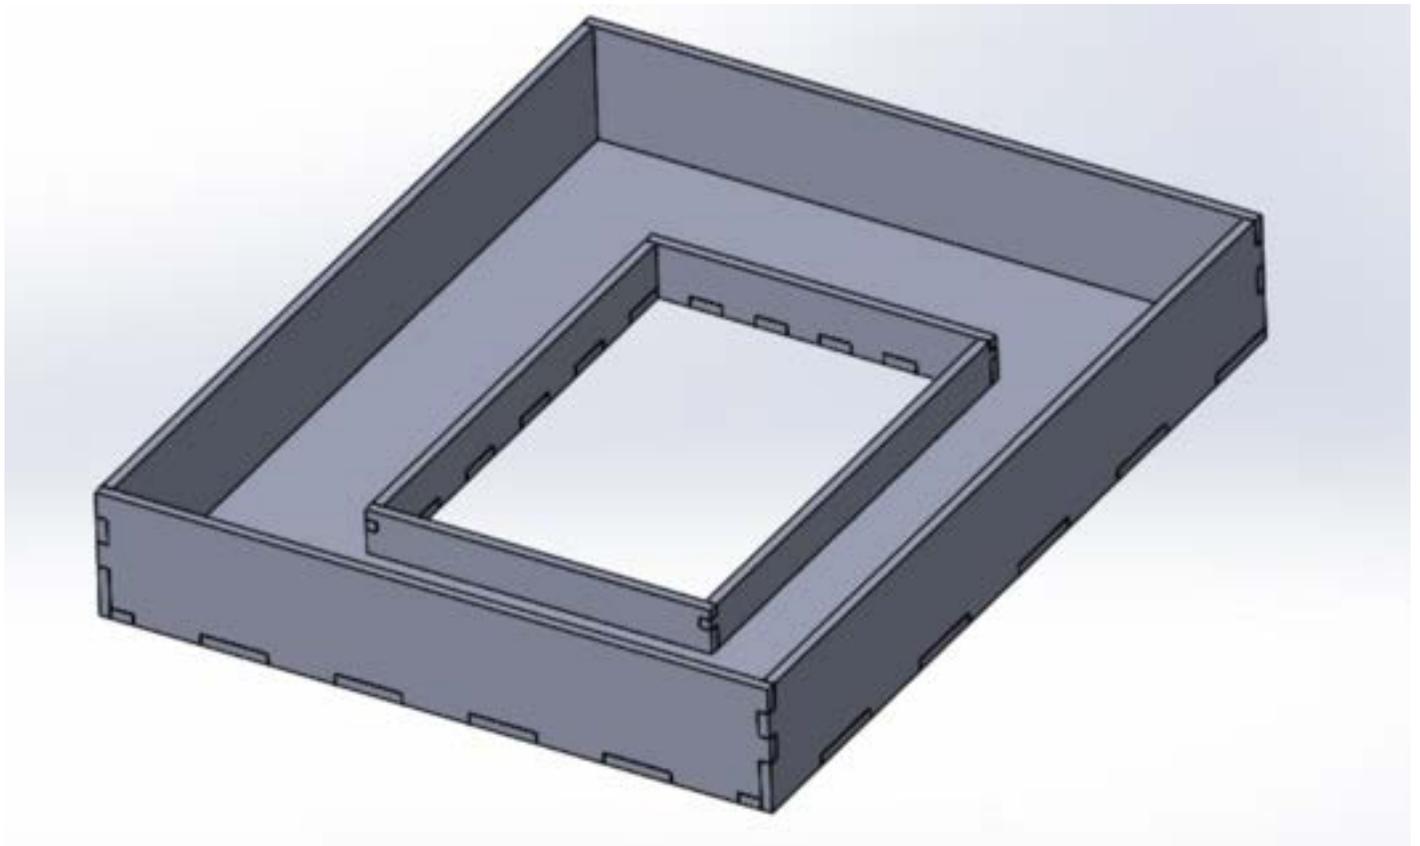
Goals: To show my weekly progress and contributions to the project.

Content:

- Determined how long it would take for copper to heat up the water bed using heat transfer equations.

See 2/22/22 Heat Transfer Calculation page in my Biology/Physiology/Chemistry folder

- Continued to develop the SOLIDWORKS drawing to be able to laser cut a prototype in the next couple of weeks.



- Contributed to the preliminary presentation and report.

Mainly the three preliminary design sections.

Conclusions/action items:

Work on the preliminary report and practice the preliminary presentation for Friday. Finalize the SOLIDWORKS drawing to laser cut a cardboard prototype. Begin to order materials for the fabrication process.



3/3/22 Progress Report 5

SAMUEL BARDWELL - Mar 02, 2022, 12:51 PM CST

Title: Sam's Progress Report 5

Date: 3/3/22

Content by: Sam

Goals: To show my weekly progress and contributions to the project.

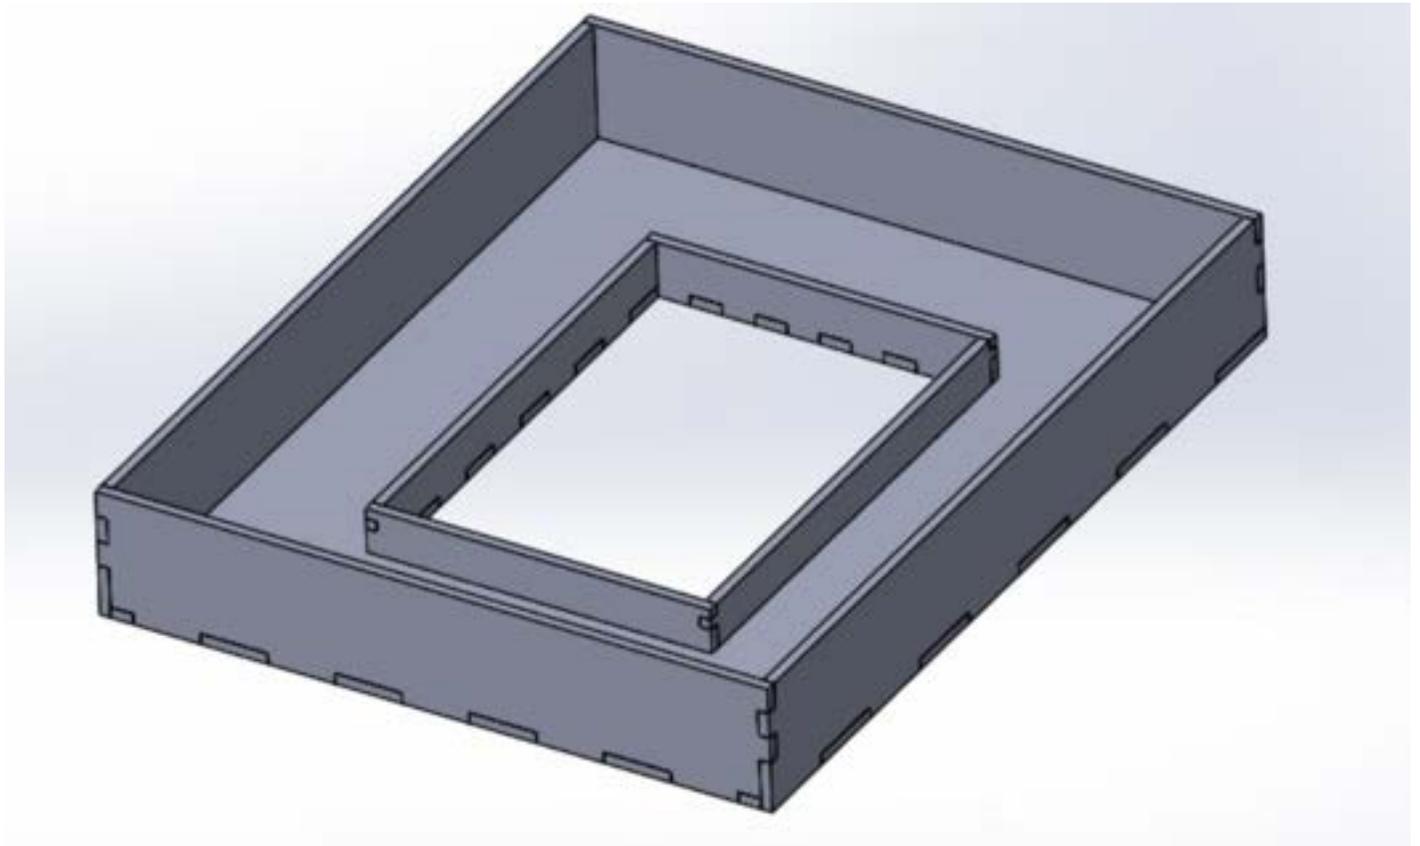
Content:

- Contributed to the preliminary report by talking about the three preliminary designs as well as the intended fabrication methods.

Preliminary presentation went very well and can be found in the Team Activities Project File folder.

Main sections I worked on for the preliminary report were the three preliminary designs, the proposed final design, as well as the methods sections for the fabrication of the box.

- Finalized a SOLIDWORKS drawing to be able to build a cardboard prototype at the makerspace



- Began finding materials that need to be ordered.

See 2/28/22 Draw Latches Entry in Parts Folder of Research

We will have to see if Dr. P will allow us to order materials off of Amazon to reduce costs of items

Need to find cheap, but reliable copper as well as adaptors

Conclusions/action items:

Laser cut a cardboard prototype to determine if the intended box design works. Begin to order materials for the project and once they arrive, update the SOLIDWORKS drawing to include the new materials. Help with the CO2 input mechanisms.



3/10/22 Progress Report 6

SAMUEL BARDWELL - Mar 09, 2022, 4:16 PM CST

Title: Sam's Progress Report 6

Date: 3/10/22

Content by: Sam

Goals: To show my weekly progress and contributions to the project.

Content:

- Found materials to be sent to Dr. P in order to hopefully obtain them after break to begin the next steps of fabrication

Expenses								
Item	Description	Manufacturer	Part Number	Date	QTY	Cost Each	Total	Link
Component 1								
Copper Tubing	5 ft rigid Copper Tubing .5 in outer diameter, .43 in inner diameter for inside the incubator well	Grainger	4WTH4	3-9-22	1	\$13.70	\$13.70	Link
Component 2								
Polycarbonate Transparent Thermal Insulation Sheets	2'x4.25' clear Polycarbonate safety plate for covering cells while viewing	Aargas	RAD64005012	3-9-22	4	\$0.55	\$2.12	Link
Component 3								
Acrylic Contact Cement	1 oz Clear Contact Cement to mount claps and assemble acrylic box.	Grainger	3EHR7	3-9-22	2	\$2.73	\$5.46	Link
Component 4								
Buna-N Square Rubber Cord	5ft, 1/4" x 1/4", 70A, 0°C - 210°C square rubber chord to prevent leakage with clamp lid	Grainger	784U15	3-9-22	1	\$4.86	\$4.86	Link
TOTAL:	\$26.14							

Table 1: Table showing the details of each material we are sending to Dr. P to order before spring break.

- Brainstormed possible CO2 input regulation designs

* See 3/8/22 Handwritten Drawing of CO2 Input in the design folder in my folder *

- Updated SOLIDWORKS design to incorporate the latch top.

Conclusions/action items:

Laser cut a prototype of the box to check if the dimensions are accurate and see if the non-fastener finger lock design works. Update SOLIDWORKS designs to incorporate new materials. Possibly create a SOLIDWORKS drawing for CO2 input regulation



3/24/22 Progress Report 7

SAMUEL BARDWELL - Mar 23, 2022, 6:40 PM CDT

Title: Sam's Progress Report 7

Date: 3/24/22

Content by: Sam

Goals: To show my weekly progress and contributions to the project.

Content:

- Updated SOLIDWORKS drawings in order to be able to laser cut a prototype of the incubator box out of HDF wood.

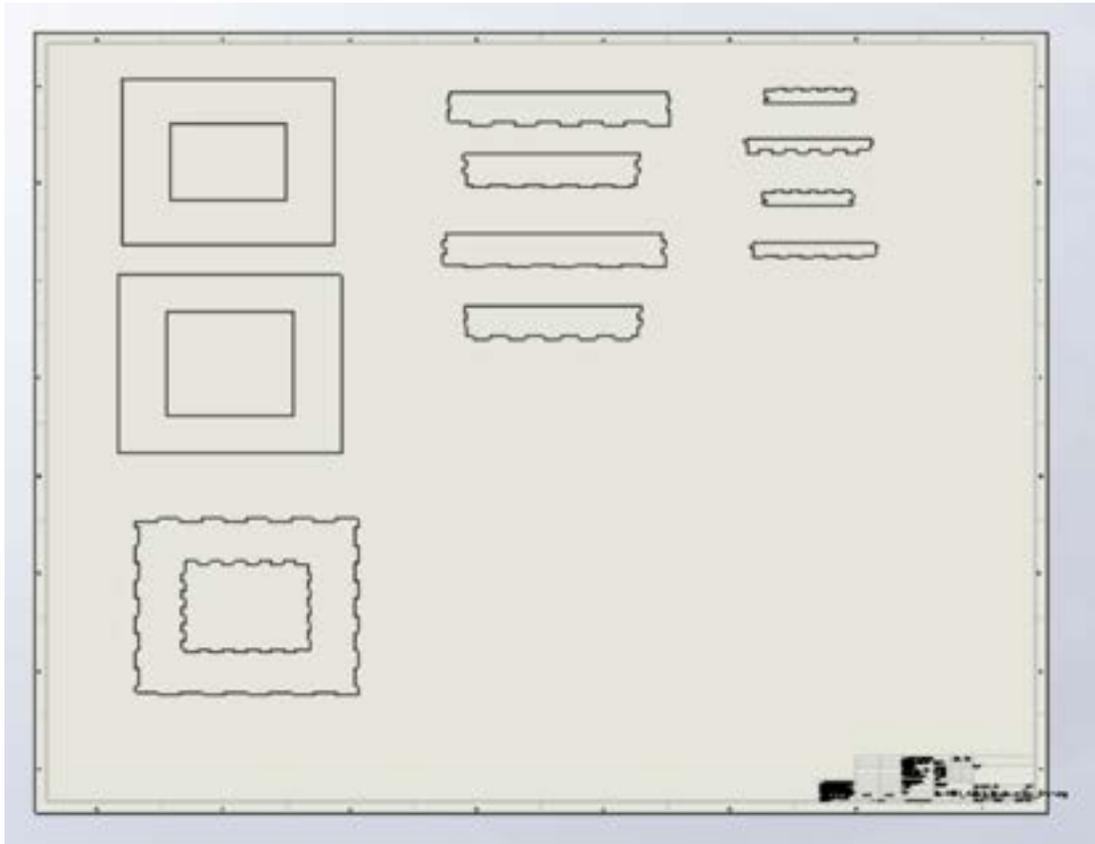


Figure 1: SOLIDWORKS drawing of the box used for the laser cutter.

- Laser cut the HDF wood and assembled the incubator prototype.

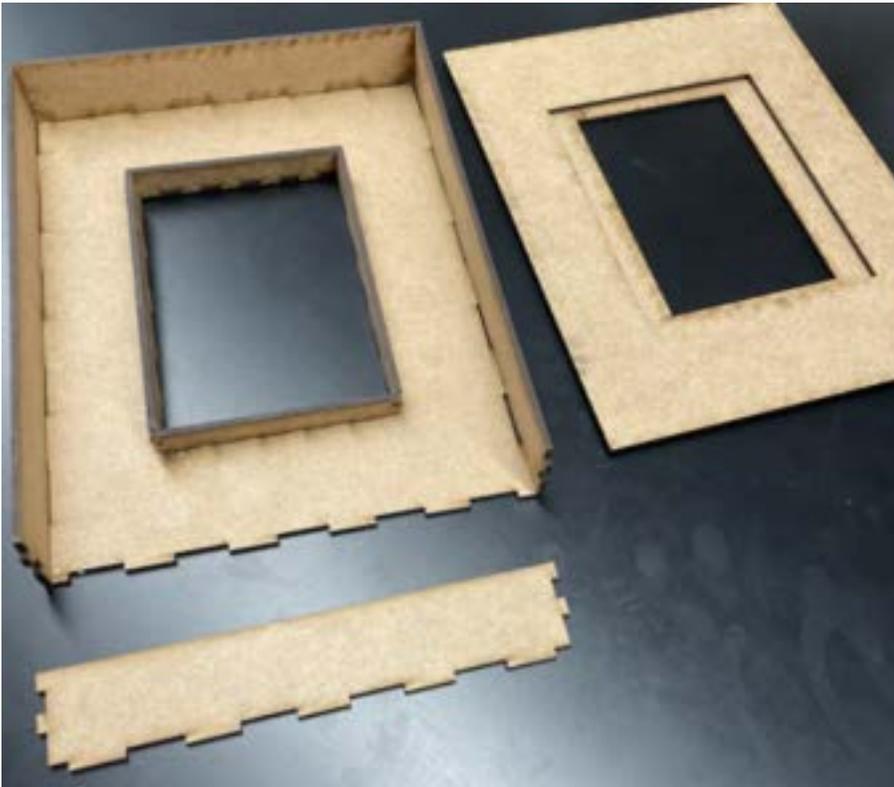


Figure 2: Disassembled laser cut box made from HDF wood in the Makerspace

- Researched CO₂ flow rates to help us with mathematical calculations on the CO₂ input.

Easiest way to determine flow rate at 1 atm (14.7 psi) of the CO₂ tank is to use a sensor.

Using a sensor will help us determine how long to leave the valve open and closed for to maintain 5% CO₂ in the incubator box.

- Contributed to the show and tell pitch and call to action.

Need help waterproofing the inside of our box or help finding a airflow rate sensor.

Conclusions/action items:

Conduct more research and mathematical calculations on the CO₂ input and flow rates to help Katie write code for the DC motor. Obtain a DC motor and begin the fabrication of the CO₂ regulation. Fabricate more of the acrylic box. Obtain latches to see if they are compatible with the incubator box.



3/31/22 Progress Report 8

SAMUEL BARDWELL - Apr 06, 2022, 6:23 PM CDT

Title: Progress Report 8

Date: 3/31/22

Content by: Sam

Goals: To show my weekly progress and contributions to the project.

Content:

- Found barbed connectors and copper couplings for the tubing part of the incubator



Figure 1: Photo of the threaded piping and barbed tubing adaptor.

- Fabricated the copper tubing ring around the inside of the incubator



Figure 2: Inner copper tubing fabrication within the prototyped box.

- Conducted flow rate testing using balloons and a known amount of water to determine the flow rate of the CO₂ tank

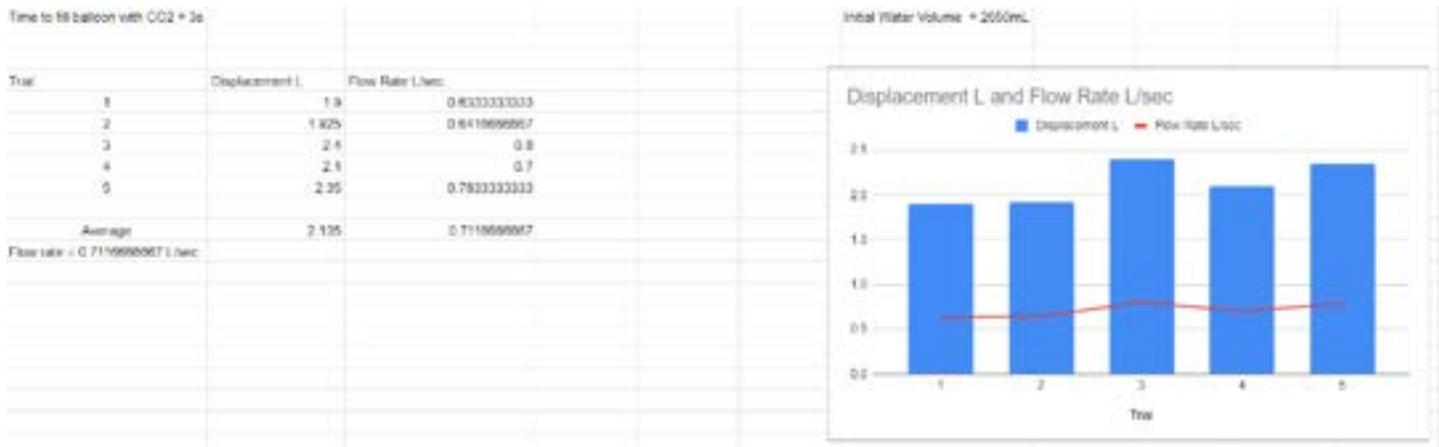


Figure 3: Photo of the flow rate data and graph showing the average flow rate at 14.7 psi.

- Completed some mathematical calculations to find out what 5% of the inside volume of the box

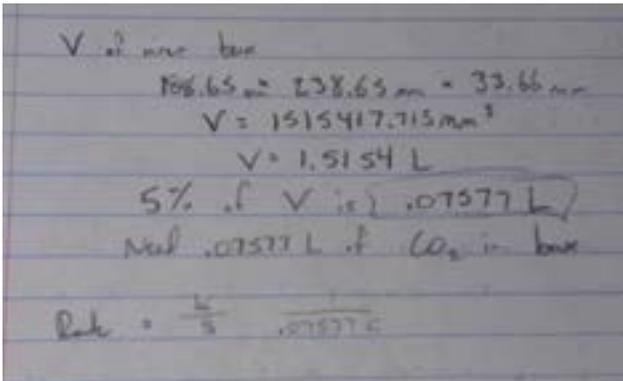


Figure 4: Photo of the mathematical calculations for the inner volume of the incubator box.

Conclusions/action items:

Finish fabricating the tubing on the inside of the incubator. Update the SOLIDWORKS drawings to incorporate the input and sensor holes. Help Katie transfer flow rate and 5% volume of the box to the DC motor code.



4/7/22 Progress Report 9

SAMUEL BARDWELL - Apr 06, 2022, 6:30 PM CDT

Title: Sam's Progress Report 9

Date: 4/7/22

Content by: Sam

Goals: To show my weekly progress and contributions to the project.

Content:

- Worked on the functioning of the DC motor.
- Fabricated part of the inner copper tubing using the TeamLab space.



Figure 1: Inner copper tubing fabrication within the prototyped box.

- Updated SOLIDWORKS drawings and assemblies to incorporate the holes necessary for the sensors and inputs and prepared that file to laser cut the acrylic

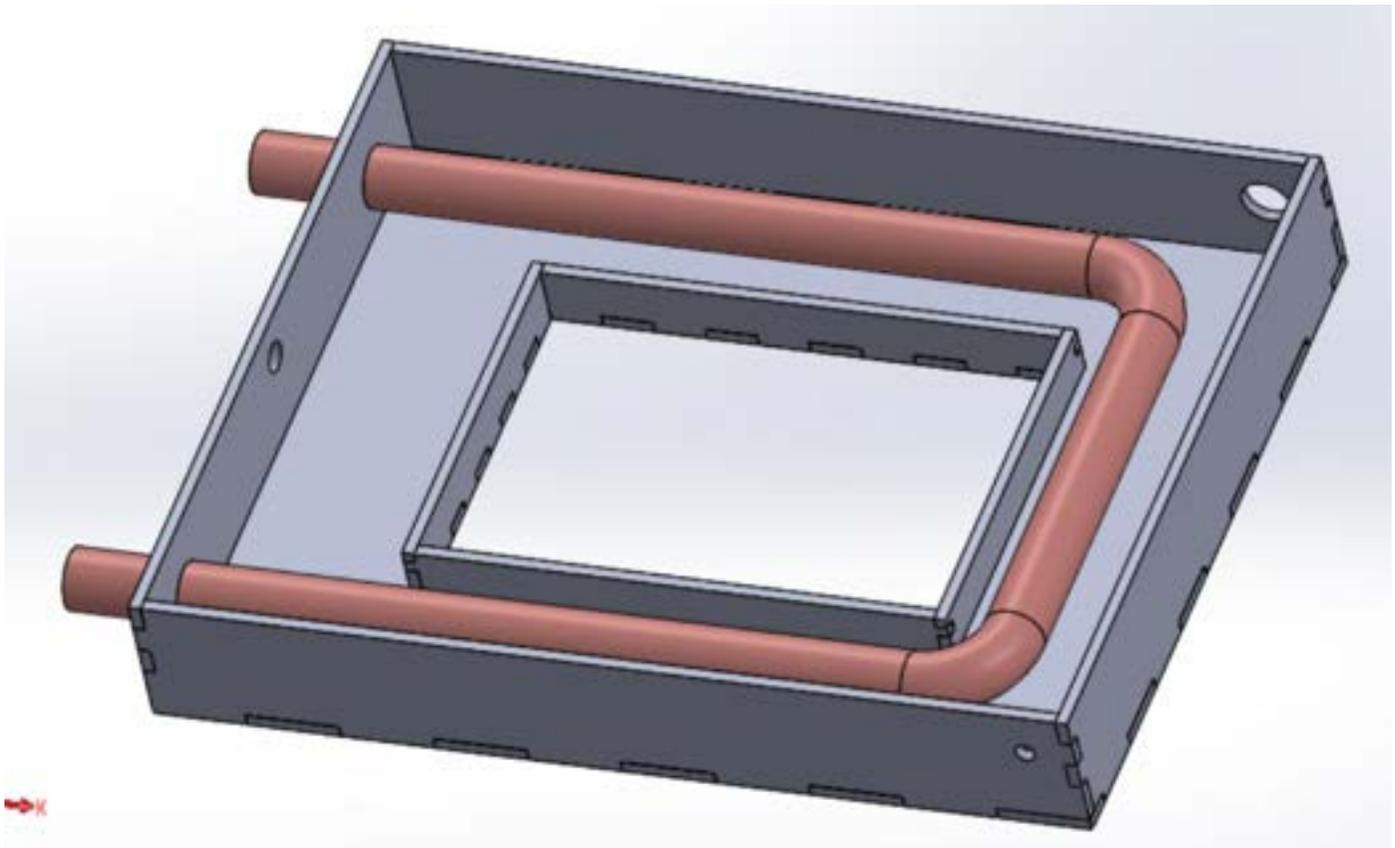


Figure 2: SOLIDWORKS drawing without the lid on the updated assembly.

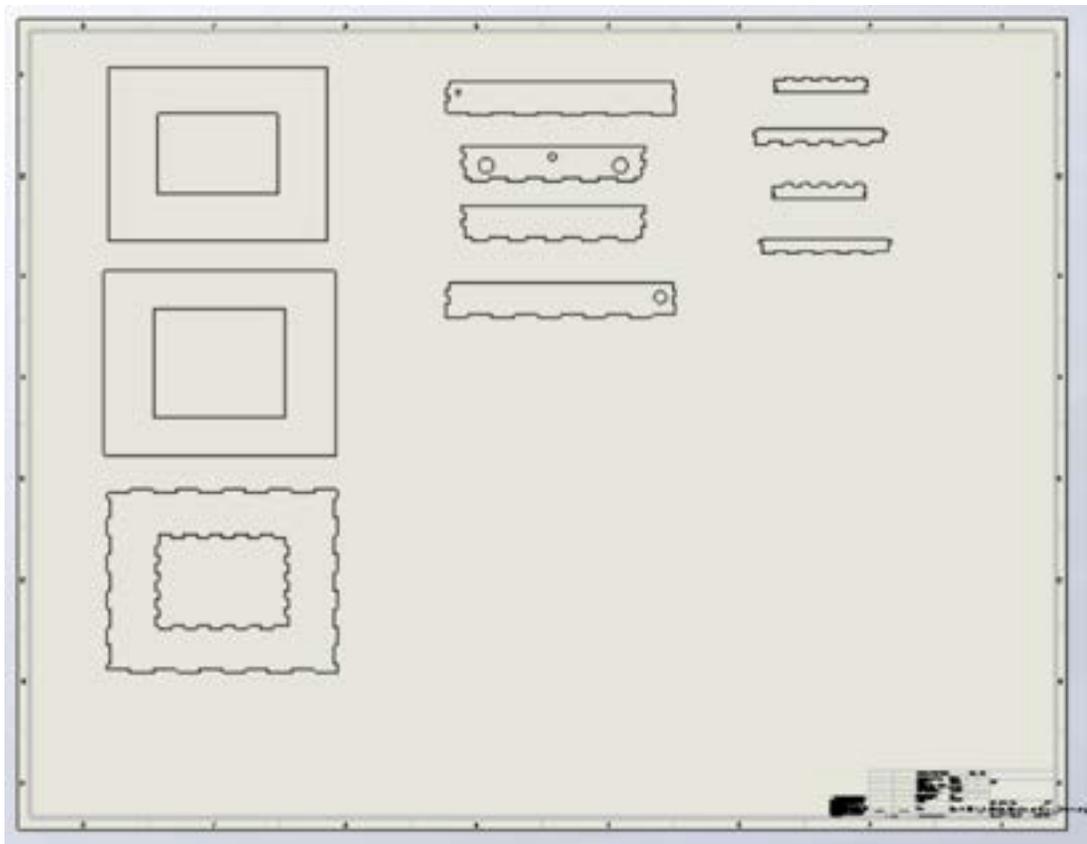


Figure 3: SOLIDWORKS drawing ready to be cut by the laser cutter with acrylic.

- Reviewed the executive summary.

Conclusions/action items:

Laser cut the acrylic box and fabricate necessary parts. Begin securing the sensors and inputs to the acrylic box. Continue working on CO₂ input control.



4/14/22 Progress Report 10

SAMUEL BARDWELL - Apr 13, 2022, 5:03 PM CDT

Title: Progress Report 10

Date: 4/13/22

Content by: Sam

Goals: To show my weekly progress and contributions to the project.

Content:

- Produced final drawings in order to laser cut the box

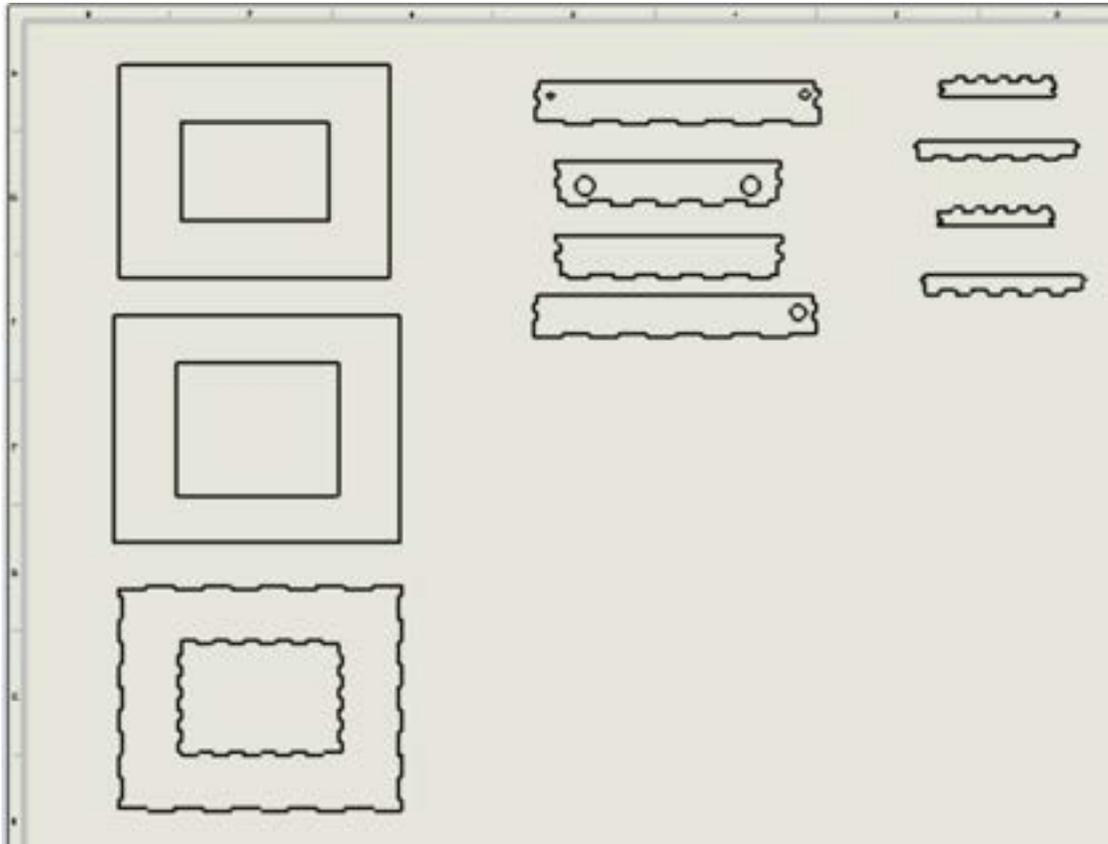


Figure 1: Final drawing before laser cutting the black acrylic.

- Laser cut black acrylic and assembled the box for the incubator.

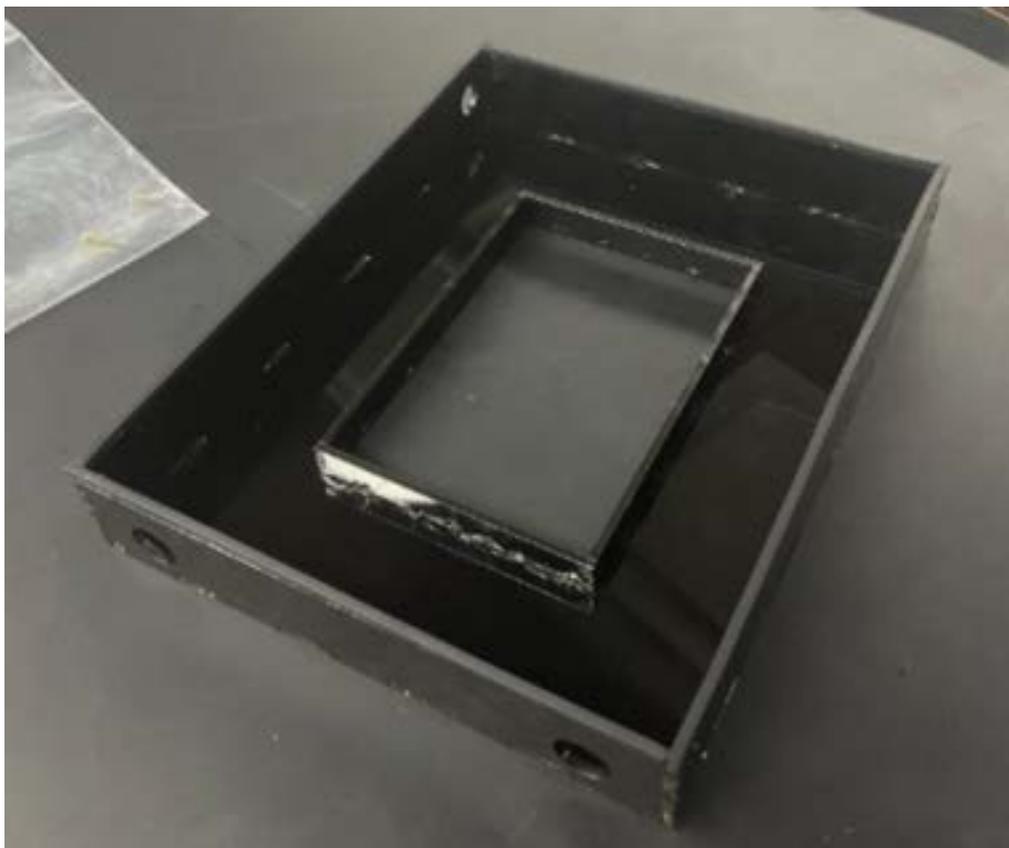


Figure 2: Assembled black acrylic box after being laser cut.

- Fabricated more of the copper tubing and added attachments for the heated water pump tubing.

Figure 3: Copper tubing with all necessary attachments for the water pump tubing.

Conclusions/action items:

Finalize the fabrication of the box and begin waterproof testing and then temperature and humidity testing of the box. Help with the CO₂ input fabrication and coding. Begin testing the box as a whole and possibly with live cells.



4/21/22 Progress Report 11

SAMUEL BARDWELL - Apr 20, 2022, 2:31 PM CDT

Title: Progress Report 11

Date: 4/21/22

Content by: Sam

Goals: To show my weekly progress and contributions to the project.

Content:

- Conducted waterproof testing on the copper tubing.
- Found out that hot glue, super glue, and electrical solder do not produce a waterproof seal on the copper.

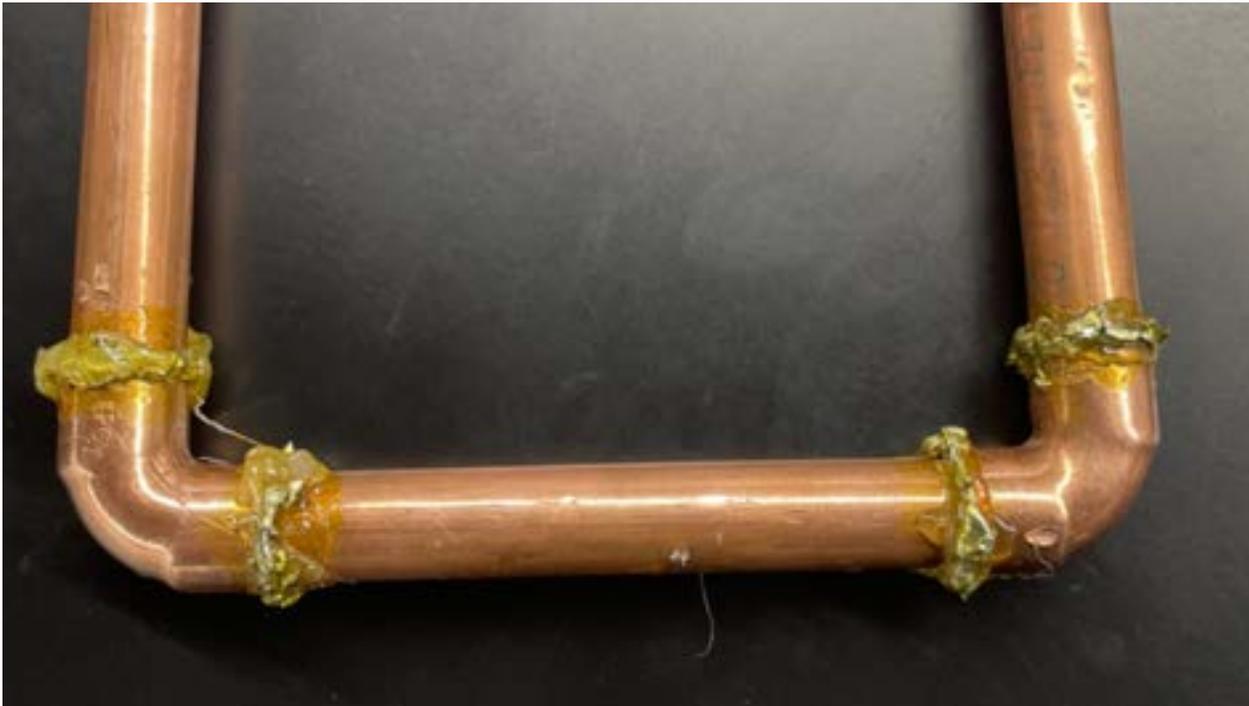


Figure 1: Photo of faulty hot glue, super glue, and electrical solder joints.

- Ended up using plumber solder and help from the TeamLab to secure the copper tubing.



Figure 2: Photo of plumbing soldered copper tubing within the incubator box.

- Conducting heat and humidity testing.
- Contributed to the executive summary and final report.

Conclusions/action items:

Begin working on final deliverables. Try to figure out CO₂ input before the end of the semester. Conduct more humidity testing and try to find the best way to not have condensation on the glass.



4/28/22 Progress Report 12

SAMUEL BARDWELL - Apr 27, 2022, 12:37 PM CDT

Title: Progress Report 12

Date: 4/28/22

Content by: Sam

Goals: To show my weekly progress and contributions to the project.

Content:

- Conducted recovery testing of the incubator.
- Contributed to the final report and presentation.

Specifically the final design sections.

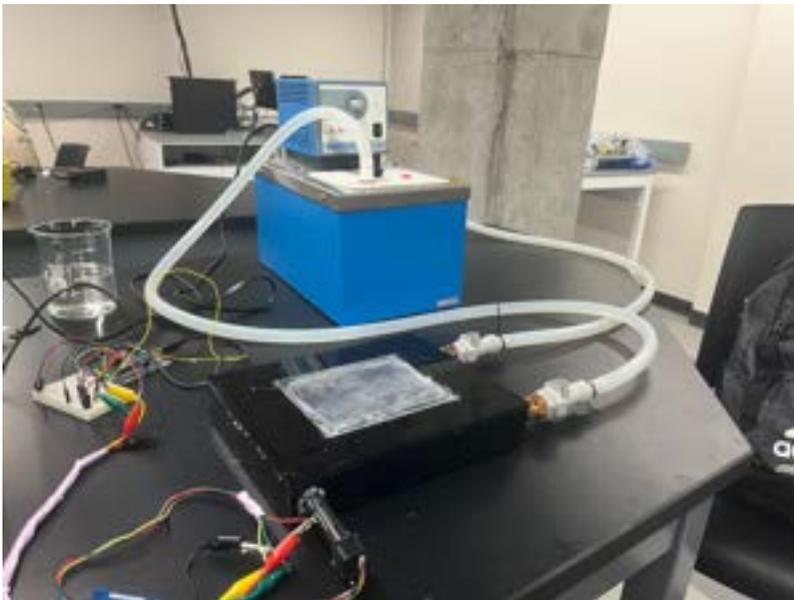


Figure 1: Whole Incubation Set-up

- Practiced the final presentation.

Conclusions/action items:

Complete all final deliverables and last day documents.



09/23/2021 Katie and Sam Initial Design Idea

Katie Day - Sep 23, 2021, 10:41 AM CDT

Title: Katie and Sam Initial Design Idea

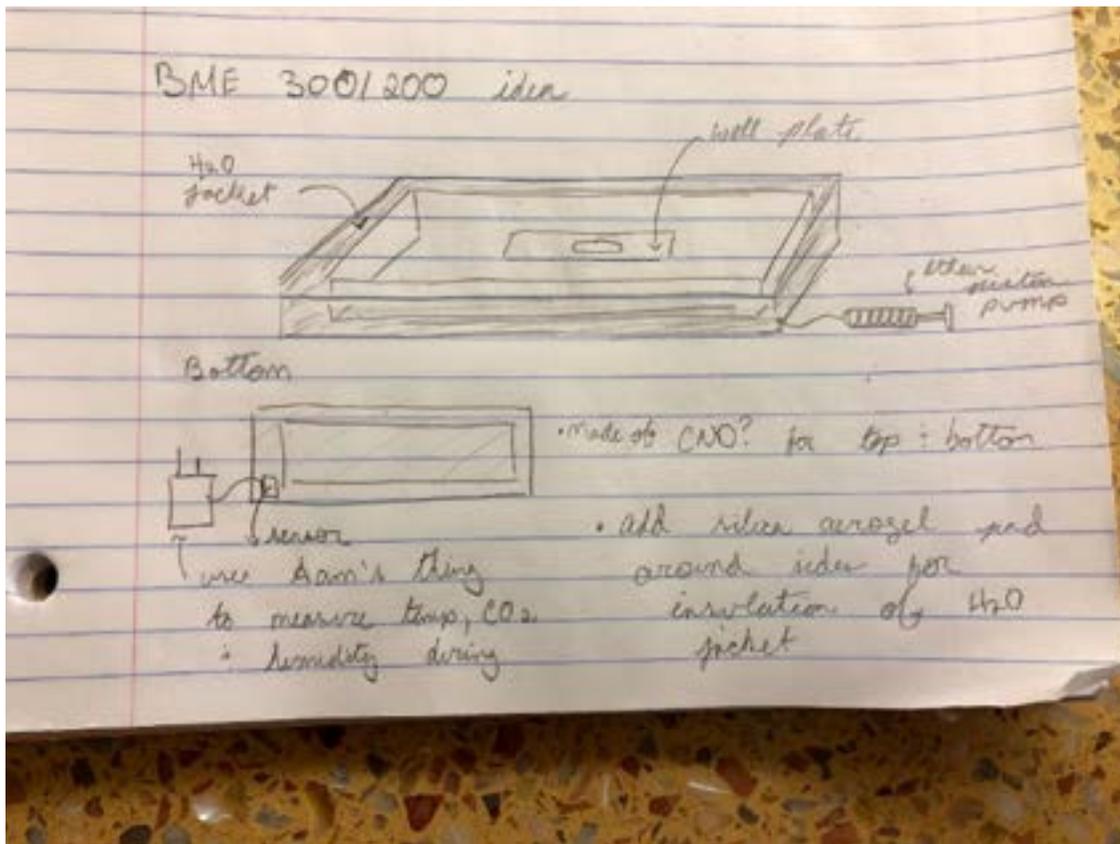
Date: 9/23/2021

Content by: Katie McGovern and Sam Bardwell

Present: Katie McGovern

Goals: To present an initial design idea based on element we have both individually researched

Content:



Conclusions/action items:

Formalize and present idea to the rest of the team



11/14/2021 Thermistor Code

Katie Day - Dec 03, 2021, 12:23 PM CST

Title: Thermistor Code (Arduino)

Date: 11/14/2021

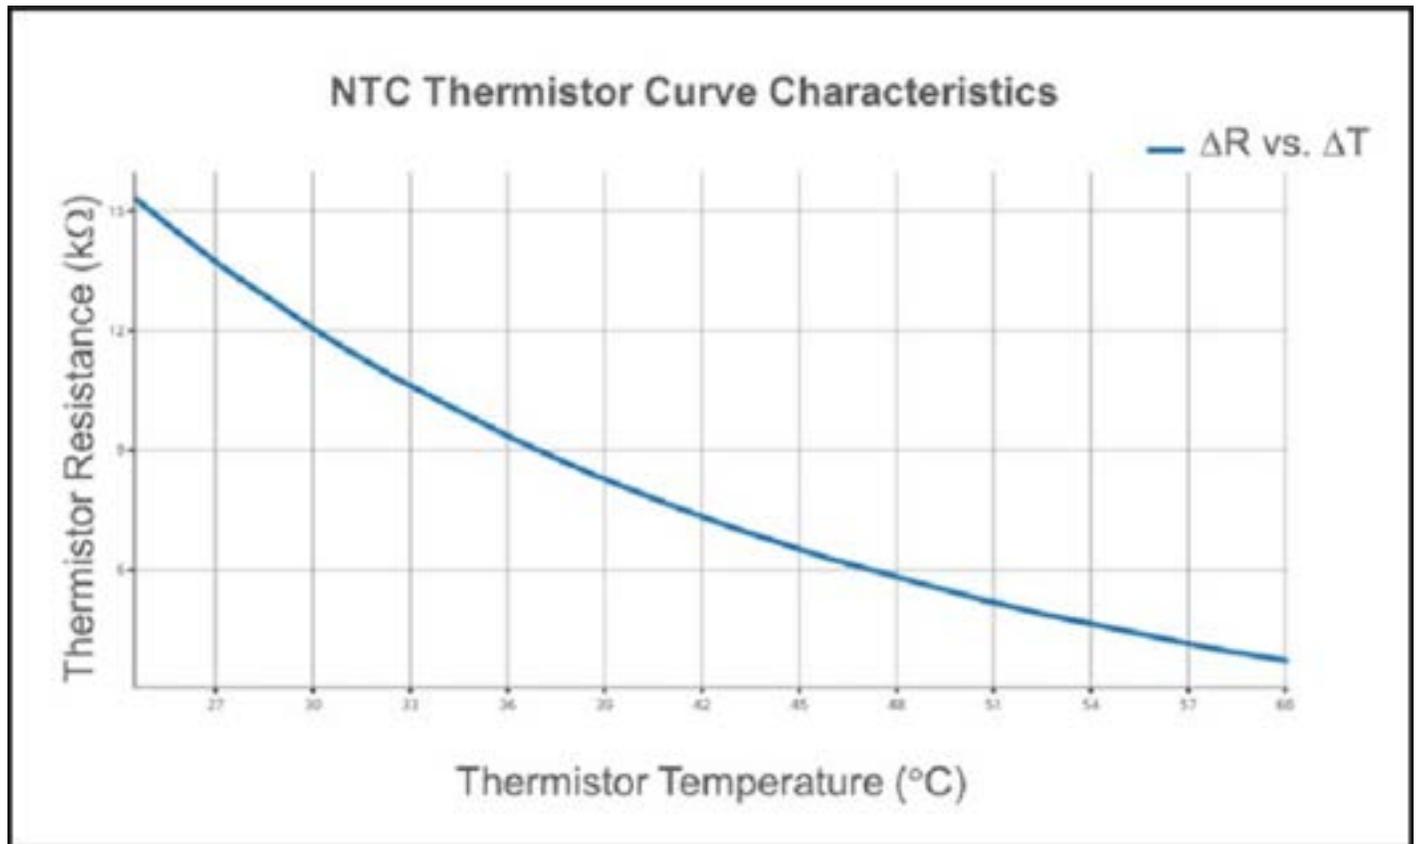
Content by: Katie Day and Olivia Jaekle

Present:

Goals: To create a code on Arduino that measures temperature and humidity with a thermistor.

Content:

See attached file. [Calibration curve](#) for thermistor attached below.




Conclusions/action items: Thermistor is working properly and outputs correct temperatures. Use in testing protocol next week with completed incubator prototype.

Katie Day - Nov 14, 2021, 8:28 PM CST



[Download](#)

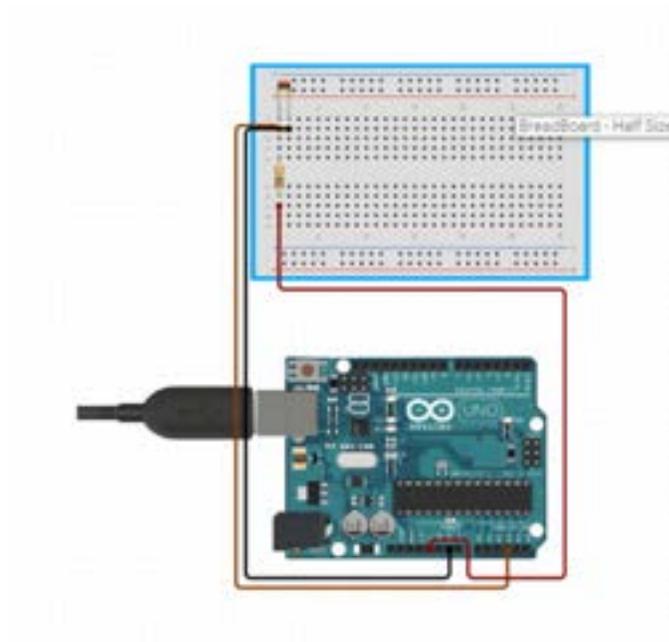thermistor.ino (745 B)



[Download](#)

Thermistor_Circuit_Diagram.PNG (82.8 kB)



11/14/2021 DHT22 Temperature and Humidity Code

Katie Day - Nov 14, 2021, 8:32 PM CST

Title: DHT22 Temperature and Humidity Code

Date: 11/14/2021

Content by: Katie Day and Olivia Jaekle

Present:

Goals: To create a code on Arduino that measures temperature and humidity with a DHT22 sensor.

Content:

See attached file.

Conclusions/action items:

1. Thank you to Dr. Nimunkar for ordering a proper DHT22 sensor and helping us with code.
2. Decide between thermistor applicator or DHT22.
3. If going with thermistor check humidity equation with values from the DHT22.

Katie Day - Nov 14, 2021, 8:31 PM CST



[Download](#)

DHT-22.ino (885 B)



11/14/2021 DHT22 Sensor Library

Katie Day - Nov 14, 2021, 8:37 PM CST

Title: DHT22 Sensor Library

Date: 11/14/2021

Content by: Katie McGovern

Present:

Goals: To get the DHT22 sensor to work properly.

Content:

In order for the DHT22 sensor to run properly a library of other files is needed. Attached are those files.

Conclusions/action items:

Katie Day - Nov 14, 2021, 8:38 PM CST



[Download](#)

code-of-conduct.md (5.83 kB) Download and put into libraries folder in Arduino.

Katie Day - Nov 14, 2021, 8:38 PM CST



[Download](#)

CONTRIBUTING.md (1.29 kB) Download and put into libraries folder in Arduino.


```
#####
# Arduino Library Manager For Arduino IDE
#####
# Author: (c) 2014-2015 Arduino LLC
#####

# Name: DHT22
# Version: 0.1.0
# License: MIT
# Maintainer: Arduino LLC
# Description: DHT22 digital temperature and humidity sensor library
# Keywords: DHT22, temperature, humidity, sensor, library
# Homepage: https://www.arduino.cc/en/package/Arduino-Library-Manager
# Source Code: https://github.com/arduino-libraries/DHT22
# Documentation: https://github.com/arduino-libraries/DHT22
```

[Download](#)

keywords.txt (529 B) Download and put into libraries folder in Arduino.



[Download](#)

DHTtester.ino (2.68 kB) Download and put into libraries folder in Arduino.


```

        license
        version 2.0, January 2000
        http://www.apache.org/licenses

This was modified for use, distribution, and installation

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction,
and distribution as defined by Section 1 through 6 of this document.

"Licensor" shall mean the copyright owner or entity authorized by
the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all
other entities that control, are controlled by, or are under common
control with that entity, for the purposes of this definition,
"control" means (i) the power, direct or indirect, to cause the
direction or management of such entity, whether by contract or
otherwise, or (ii) ownership of fifty percent (50%) or more of the
outstanding shares, or (iii) beneficial ownership of such entity.

"You" or "Your" shall mean an individual or Legal Entity
exercising permissions granted by this License.

"Source" code shall mean the preferred form for making modifications,
including but not limited to software source code, documentation,
scripts, and configuration files.

"Object" code shall mean any form resulting from mechanical,
electronic, or magnetic transformation of a source form, including but
not limited to compiled object code, generated documentation,
and conversions to other media forms.

"Work" shall mean the work of authorship, whether in source or
object form, made available under the License, as indicated by a
copyright notice that is included in or attached to the work
(including in printed or other media forms).

"Derivative Works" shall mean any work, whether an Update or
Modification, that is based on the work or derived from the work and for which the
copyright owner or patent holder is not the author or creator, and which
includes any form of material, in whole or in part, that is derived from the
work under the License, but which does not include material derived from the
work that has been distributed under the License.

"Translations" shall mean the work of authorship, including
the in whole or in part of the work and any modifications or
translations to the work of authorship, that is derived from
the work under the License, but which does not include material
derived from the work under the License, but which does not include
material derived from the work under the License.

"Updates" shall mean the work of authorship, including
the in whole or in part of the work and any modifications or
translations to the work of authorship, that is derived from
the work under the License, but which does not include material
derived from the work under the License, but which does not include
material derived from the work under the License.

"Modifications" shall mean the work of authorship, including
the in whole or in part of the work and any modifications or
translations to the work of authorship, that is derived from
the work under the License, but which does not include material
derived from the work under the License, but which does not include
material derived from the work under the License.

```

[Download](#)

LICENSE.txt (11.4 kB) Download and add to libraries folder in Arduino.



[Download](#)

README.md (10.4 kB) Download and add to libraries folder in Arduino.



[Download](#)

sensortest.ino (4.17 kB) Download and add to libraries folder in Arduino.



11/14/2021 MH-Z16 CO2 Monitor Code

Katie Day - Nov 14, 2021, 8:48 PM CST

Title: MH-Z16 NDIR CO2 Monitoring Code

Date: 11/14/2021

Content by: Katie McGovern

Present:

Goals: To create a code in Arduino that allows the MH-Z16 NDIR CO2 monitor to work.

Content:

See attached file.

Conclusions/action items: Test the CO2 sensor using the testing protocols created by Maya and Caroline. Figure out a way to convert ppm to percentage.

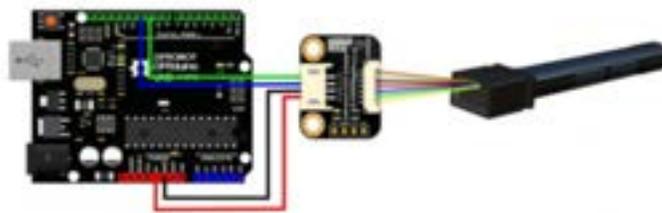
Katie Day - Dec 03, 2021, 12:25 PM CST



[Download](#)

ReadConcentration.ino (888 B)

Katie Day - Dec 03, 2021, 12:25 PM CST



[Download](#)

MH_Z16_Circuit_Diagram.PNG (155 kB)



12/03/2021 Thermistor Testing

Katie Day - Dec 07, 2021, 7:43 PM CST

Title: Thermistor Testing

Date: 12/3/2021

Content by: Katie, Olivia, Maya, and Caroline

Present: Katie and Olivia

Goals: To test the accuracy of our thermistor against an incubator.

Content:

Testing protocol written by Maya and Caroline and performed by Olivia and me. Results are below.

Conclusions/action items:

Thermistor is working properly and ready for implementation.

Katie Day - Dec 03, 2021, 12:28 PM CST



[Download](#)

Misty_In_Incubator_10-min.PNG (15.4 kB)



12/03/2021 CO2 Testing

Katie Day - Dec 07, 2021, 7:42 PM CST

Title: CO2 Testing

Date: 12/3/2021

Content by: Katie, Olivia, Maya, and Caroline

Present: Katie and Olivia

Goals: To test the CO2 sensor to make sure that it is working properly.

Content:

Attached our the results of our testing, testing protocols written by Maya and Caroline, performed by Olivia and me.

Conclusions/action items:

The CO2 sensor is ready for incorporation into the incubator.

Katie Day - Dec 03, 2021, 3:22 PM CST



[Download](#)

concentration.csv (2.43 kB)

Katie Day - Dec 07, 2021, 7:42 PM CST



[Download](#)

concentration_graphs.csv (2.34 kB)



12/03/2021 Humidity Testing

Katie Day - Dec 07, 2021, 7:47 PM CST

Title: Humidity Testing

Date: 12/3/2021

Content by: Katie and Olivia

Present: Katie and Olivia

Goals: To test the accuracy of our humidity formula against the DHT22 sensor

Content:

Humidity data gathered over time in order to perform ttest to determine statistically significance compared to the DHT22 sensor.

Conclusions/action items:

Send data to caroline, olivia, and maya for analysis.

Katie Day - Dec 07, 2021, 7:48 PM CST



[Download](#)

Misty_Humidity_Data.csv (1.55 kB)

Katie Day - Dec 07, 2021, 7:48 PM CST



[Download](#)

Combined_Humidity_Data.csv (4.23 kB)

```

DHT22 Humidity (%)  Multi-Waterfall (%)
12/07 12:00 99.487
12/07 12:01 99.487
12/07 12:02 99.487
12/07 12:03 99.487
12/07 12:04 99.487
12/07 12:05 99.487
12/07 12:06 99.487
12/07 12:07 99.487
12/07 12:08 99.487
12/07 12:09 99.487
12/07 12:10 99.487
12/07 12:11 99.487
12/07 12:12 99.487
12/07 12:13 99.487
12/07 12:14 99.487
12/07 12:15 99.487
12/07 12:16 99.487
12/07 12:17 99.487
12/07 12:18 99.487
12/07 12:19 99.487
12/07 12:20 99.487
12/07 12:21 99.487
12/07 12:22 99.487
12/07 12:23 99.487
12/07 12:24 99.487
12/07 12:25 99.487
12/07 12:26 99.487
12/07 12:27 99.487
12/07 12:28 99.487
12/07 12:29 99.487
12/07 12:30 99.487
12/07 12:31 99.487
12/07 12:32 99.487
12/07 12:33 99.487
12/07 12:34 99.487
12/07 12:35 99.487
12/07 12:36 99.487
12/07 12:37 99.487
12/07 12:38 99.487
12/07 12:39 99.487
12/07 12:40 99.487
12/07 12:41 99.487
12/07 12:42 99.487
12/07 12:43 99.487
12/07 12:44 99.487
12/07 12:45 99.487
12/07 12:46 99.487
12/07 12:47 99.487
12/07 12:48 99.487
12/07 12:49 99.487
12/07 12:50 99.487
12/07 12:51 99.487
12/07 12:52 99.487
12/07 12:53 99.487
12/07 12:54 99.487
12/07 12:55 99.487
12/07 12:56 99.487
12/07 12:57 99.487
12/07 12:58 99.487
12/07 12:59 99.487
12/07 13:00 99.487

```

[Download](#)

Combined_Humidity_Data.txt (2.08 kB)



[Download](#)

DHT22_Humidity_Data.csv (441 B)



12/07/2021 Group Testing Protocols

Katie Day - Dec 07, 2021, 7:37 PM CST

Title: Group Testing Protocols

Date: 12/07/2021

Content by: Maya Tanna and Caroline Craig

Present: Katie McGovern and Olivia Jaekle

Goals: To create testing protocols and verify that the elements of our design are working as expected, accurately, and precisely.

Content: The Testing Protocols and the parts of the protocol that were able to be evaluated during the semester.

Conclusions/action items:

The temperature, humidity, CO2, and optics are all working as expected.

Katie Day - Dec 07, 2021, 7:37 PM CST

Internal Environment: Temperature and Humidity Sensor Test Protocol (Shamshad 10/17)

Introduction:
Name of Tester:
Date of Test/Re-test:
Site of Test Performance:

Objectives:
The goal will be employing a sensor inside the incubator in order to measure the internal temperature. The measurements of the humidity and temperature will be obtained by an A0000000000 Arduino compatible sensor and a Thermistor. The sensor test is made sure that the test with the A0000000000 is working properly by calibrating the sensor and then verifying its accuracy at steady state and precision in a dynamic range using a thermometer. To calibrate the sensor, the test will use a reference value in the Arduino IDE. Once the sensor is calibrated, it is necessary to test for measuring the temperature and humidity of the working environment to gauge if they are both working as expected and then measuring its temperature at various heights and temperatures using a high-precision sensor. Additionally, the test will measure the temperature inside the incubator with a thermometer and the sensor. To keep the incubator completely sealed, the two smaller ports are being disabled so they will be inserted into the incubator and read through the glass. The test will be conducted once until the sensor value is within 2% of the thermometer temperature.

Step	Procedure	Verification/Validation	Pass/Fail	in Error of Tester
1	Calibrate the sensor using a thermometer and a reference value.	CC - verified Comments:	Pass	CC, MT
2	Test the precision of the humidity sensor by using the right and left temperature. Read a cup of water in a 100 ml beaker for 10 minutes. Place the sensor in the cup of hot water and measure the temperature inside by using the Arduino IDE. Then, place the sensor in the freezer and measure the temperature inside. Document the length of the sensor. If the sensor follows these conditions, it is valid.	CC - verified Comments:	Pass	CC, MT
3	Set up the incubator for the test. Set up a digital thermometer in the incubator.	CC - verified Comments:		

[Download](#)

Group_Testing_Protocols.pdf (92.6 kB)



12/07/2021 Incubator Fabrication

Katie Day - Dec 07, 2021, 7:57 PM CST

Title: Incubator Fabrication

Date: 12/07/2021

Content by: Katie McGovern

Present: Katie McGovern and Sam Bardwell

Goals: To fabricate the incubator.

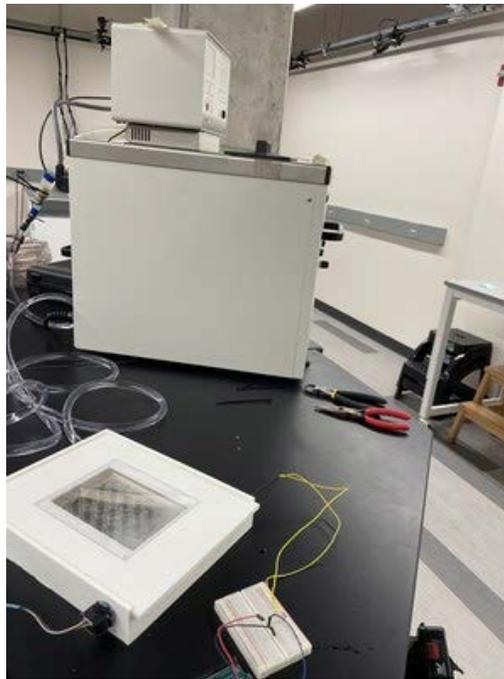
Content:

The box was fabricated by first drilling 3/8 inch diameter holes in the front of the box and then using a circular file to expand them so that the barbed connectors could fit in the incubator. They were then hot glued. The glass was hot glued onto the small divot made for them in the design. A 1/4 inch hole was drilled on the bottom right corner for the thermistor and filed with a circular file. A 1/2 inch hole was drilled and expanded via circular file for the CO2 sensor to fit in. The CO2 sensor and the thermistor were hot glued into place. The 3/8x1/4 inch tubing was wrapped in a circular fashion along the interior of the box and connected to the barbed vacuum connectors. They were then secured by zip ties. They were connected to a 1/2x3/8 inch tubing that was secured via zip ties to both the connector and the hot water pump. Then roughly 16 oz of water was poured into the incubator.

Conclusions/action items:

The PLA material needs to be changed as it was difficult to drill into, very brittle, and appeared to be leaking in random places.


Katie Day - Dec 07, 2021, 7:52 PM CST



[Download](#)

IMG_5896.jpg (780 kB)

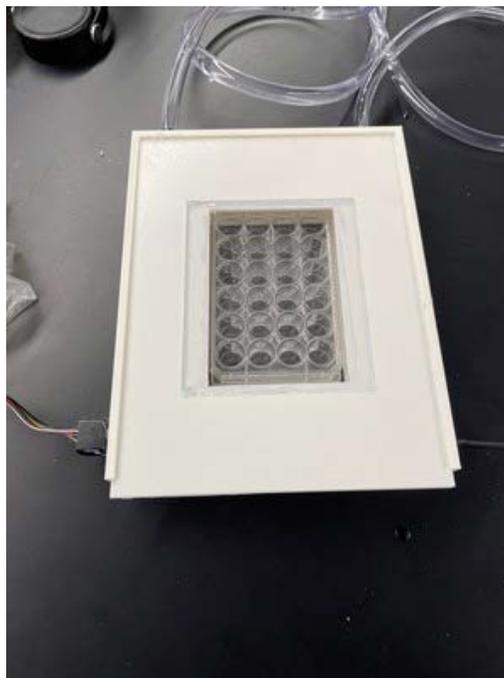Katie Day - Dec 07, 2021, 7:52 PM CST



[Download](#)

IMG_5894.jpg (1.19 MB)


Katie Day - Dec 07, 2021, 7:52 PM CST



[Download](#)

IMG_5893.jpg (1.19 MB)

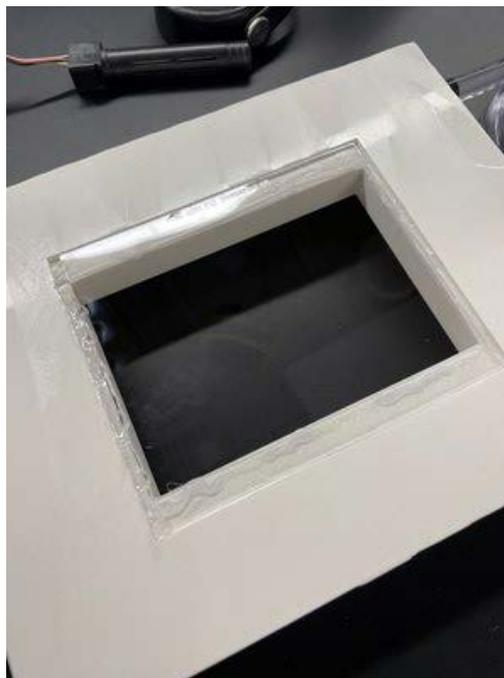Katie Day - Dec 07, 2021, 7:52 PM CST



[Download](#)

IMG_5892.jpg (597 kB)

Katie Day - Dec 07, 2021, 7:52 PM CST



[Download](#)

IMG_5891.jpg (875 kB)

Katie Day - Dec 07, 2021, 7:52 PM CST



[Download](#)

IMG_5890.jpg (404 kB)

Katie Day - Dec 07, 2021, 7:52 PM CST



[Download](#)

IMG_5889.jpg (1.27 MB)


Katie Day - Dec 07, 2021, 7:52 PM CST



[Download](#)

IMG_5888.jpg (780 kB)

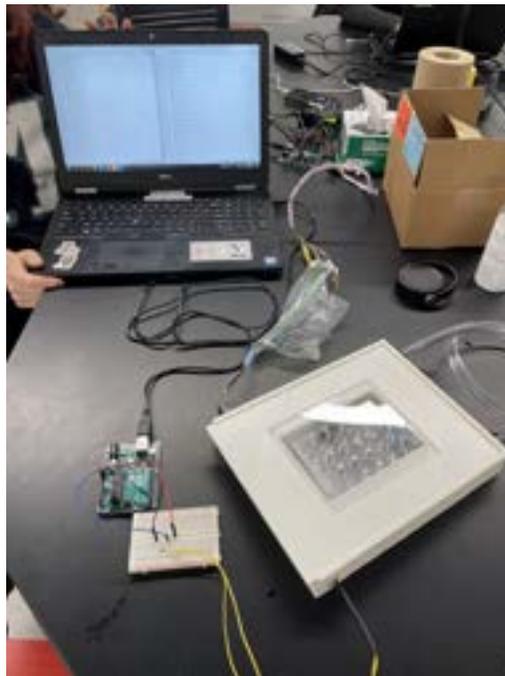Katie Day - Dec 07, 2021, 7:52 PM CST



[Download](#)

IMG_5895.jpg (693 kB)



12/07/2021 Attempted Incubator Testing

Katie Day - Dec 07, 2021, 8:00 PM CST

Title: Attempted Incubator Testing

Date: 12/07/2021

Content by: Katie McGovern and Sam Bardwell

Present: Katie McGovern and Sam Bardwell

Goals: To initially determine whether or not our incubator was working as expected.

Content: Data collected during testing.

Conclusions/action items:

1. Polyethelene tubing acted more as an insulator than a conductor and would not heat up the water bath to the desired temperature.
Need to use a metal tube.
2. PLA box was leaking slightly. It is unclear where or how it is leaking as it has been sealed via hot glue and zip ties.
3. Glass did fog up after about 30 minutes so we will need to figure out how to demist the glass.

Katie Day - Dec 07, 2021, 8:01 PM CST



[Download](#)

Incubator_Temp_Over_Time.csv (5.1 kB)

Katie Day - Dec 07, 2021, 8:01 PM CST



[Download](#)

Incubator_Temp_Over_Time.PNG (68.7 kB)

Katie Day - Dec 07, 2021, 8:01 PM CST



[Download](#)

Incubator_Temp_Hum_Over_Time.csv (5.1 kB)



[Download](#)

Actual_Inc_HUm_Data.csv (2.19 kB)



2/28/2022 CO2 Valve Monitoring

Katie Day - Feb 28, 2022, 7:45 PM CST

Title: CO2 Valve Monitoring

Date: 2/28/2022

Content by: Katie Day

Present:

Goals: To try and come up with a way to monitor the flow of CO2 from a 100% CO2 tank.

Content:

See links for Youtube videos I used as inspiration.

- https://www.youtube.com/watch?v=An_A2XnI6IQ
- https://www.youtube.com/watch?v=An_A2XnI6IQ
- <https://www.youtube.com/watch?v=f8B9pILAqGI>

Idea:

- Use a DC motor and a rod with arms that go above and below the pressure gauge. Code the DC motor to move to the left or right (increasing or decreasing the tilt of one of the arms) to let more CO2 into the incubator or less depending on the reading from the CO2 sensor in the incubator.
- See drawing at the bottom for better clarity.

Conclusions/action items:

This could be a good way to measure CO2 output. See if Dr. Puccinelli or Dr. Kinney has legos or knix I could use to build the arms. I think that might be a cost effective way to build it. Or reach out to Dr. Nimunkar and see what he has on hand. Maybe even cut some wood scraps if we want something sturdier. First take a look at CO2 tank before starting purchasing.

Katie Day - Feb 28, 2022, 7:44 PM CST



[Download](#)

IMG_0451.heic (3.25 MB)



3/11/2022 WARF Presentation

Katie Day - Mar 10, 2022, 9:34 AM CST

Title: WARF Presentation

Date: 3/11/2022

Content by: WARF on Campus

Present:

Goals: WARF overview, protecting innovation, commercializing innovation, etc.

Content:

- WARF beginnings
 - Created in 1925 to manage intellectual property related to Dr. Steenbock
 - Organized as a non profit
 - Proceeds support research at UW-Madison
 - Governed by an independent board of alumni
- Vision
 - Enable UW Madison research to solve the world problems
- Mission
 - To support scientific research within the UW-Madison COmmunity
- Cycle of Innovation
 - 6th overall in research funding
 - 350-400 invention disclosures each year
 - 2000 issued us patents with 700 pending
 - 50+ licenses annually
 - >1 bill products sold
- Protecting inoovation
 - Patents
 - machines and devices
 - compound
 - processes and methods
 - improvement s
 - Trademarks
 - Words and phrases
 - Colors
 - pictures/logos
 - sound
 - Copyrights
 - Literary works
 - webpages
 - software programs
- Prior Art
 - "references" created before a specific date
 - by the inventor: >1 year before the filling date of the patent application
 - By another: before the filing date of the patnet application
 - Novelty and non-obviousness are evaluated based on prior art
 - Internationally, absolute novelty is typically required
- Public Disclosure and Prior Art
 - Examples of public disclosures of an invention
 - Journal pub
 - Talk or poster at conference/professional meeting
 - Non-confidential deparment seminar
 - Open thesis defense
 - Cataloged dissertation
 - Some funded grant abstracts
 - Description on an internet site
- Requirements for Patentability
 - Eligible

- Useful
- Enabled
- Described
- Novel
- Non-obvious
- WARF's IP Management process
 - Disclosure your invention --> Disclosure committee meets monthly to review new disclosures--> patent application drafting, filing, and prosecution --> technology marketing ---> licensing
- Licensing Considerations for New Disclosure
 - Chance of licensing
 - potential applications, technology benefits and impact, state of market, etc
 - Timeline for licensing
 - Licensing strategy
 - Plan for next year
 - Revenue projections
- Licensing Innovation
 - WARF Provides
 - Exclusive or non-exclusive rights to make, use, sell, or import
 - Licensee Provides
 - Develop and commercialize
 - Reasonable Fees: upfront, royalties, milestones, etc
 - Fulfill obligations under Bayh-Dole
 - Timeline
 - Varies from months to years
 - Depends on technology and market readiness
- WARF's Accelerator Program
 - Milestone-based **validation funding** to speed promising technologies to a commercial license
 - **Goal:** Accelerate commercialization prospects for WARF IP
 - **Catalysts:** Expert Consultants with significant business experience
 - **Five Sectors**
 - Computer Science and Engineering
 - Med Devices and Healthcare
 - CleanTech
 - Food and Agriculture
 - Research Tools
 - REsults
 - 28 licenses / 6 paid options
 - 13 startups
 - \$5.5M (45% of funding) in COE
- Finding a Licensee
 - Internal
 - INventor Contacts
 - Meetings
 - Sponsored Research
 - External
 - Technology descriptions on website
 - Publications
 - Technology portals
 - Targeted outreach
 - Inventor Startup
- Factors to consider in starting a company
 - Technology
 - Market
 - Management
 - Capital Requirement s
- Start-up Resources
 - Discovery to Product, a campus wide resource for entrepreneurship
 - Entrepreneurons - Seminar Series
 - Innovation Roadmap Series
 - UpStart Program for Minority and Women's Entrepreneurship
 - Law and Business Entrpreneurship Clinics

Conclusions/action items:

I think that our design has intellectual property as it is a low cost, novel, alternative to large costly microscope incubators that can be used in research labs, teaching environments, and other research applications all over the world.



3/21/2022 Initial Prototype Laser Cutting

Katie Day - Mar 21, 2022, 7:37 PM CDT

Title: Initial Prototype Laser Cutting

Date: 3/21/2022

Content by: Katie Day

Present: Katie Day and Sam Bardwell

Goals: To laser cut our initial prototype.

Content:

- Sam and I were not able to laser cut the initial prototype
- Problems
 - The rastering is not going to work. It is too complex, takes too long, and is overall inefficient
 - When I transferred the drawing to illustrator I created too many paths causing the laser cutter to go over the same piece multiple times
 - The thickness was in pts not inches
 - The offset is slightly too large for what we need
- Successes
 - It does print and fit together (not well but nothing glue can't fix)
 - I still remember how to use the laser cutter
 - The box dimensions and design will work
 - The cardboard was a great choice in material for the prototype

Conclusions/action items:

Go back to the makerspace tomorrow. Fix the paths, fix the thickness, decrease the offset, and laser cut the rest of the box to put together.



3/22/2022 Prototype Laser Cutting - Copy

Katie Day - Mar 22, 2022, 1:26 PM CDT

Title: Initial Prototype Laser Cutting

Date: 3/21/2022

Content by: Katie Day

Present: Katie Day and Sam Bardwell

Goals: To laser cut our initial prototype.

Content:

See attached file.

Conclusions/action items:

Fix the offset on the inside fillets because they are slightly too tight. Reprint with acrylic whenever we are ready.

Katie Day - Mar 22, 2022, 1:28 PM CDT



[Download](#)

IMG_6090.jpg (3.62 MB)



[Download](#)

IMG_6091.jpg (3.42 MB)



3/30/2022 Flow Rate Calculations

Katie Day - Mar 30, 2022, 7:07 PM CDT

Title: Flow Rate Testing

Date: 3/30/2022

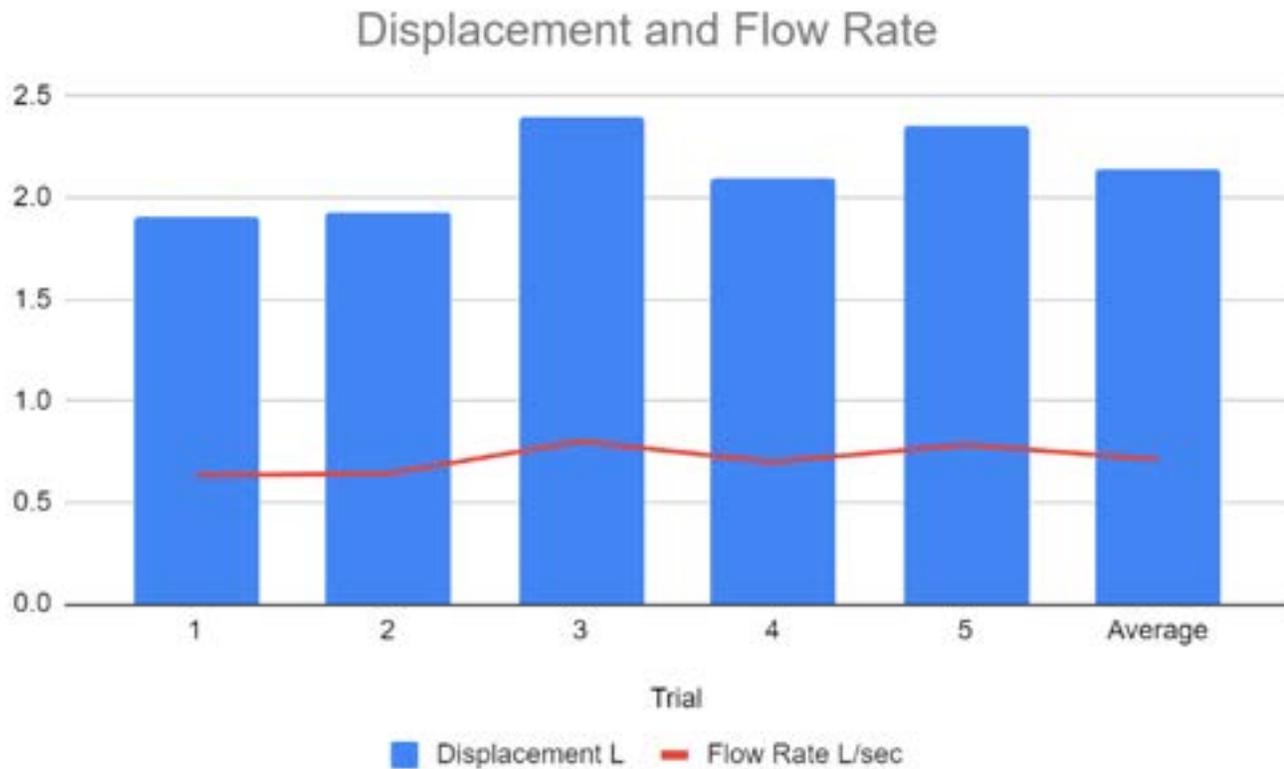
Content by: Katie Day

Present: Katie Day and Sam Bardwell

Goals: To calculate Flow rate of the CO2 tank via balloon trials.

Content:

Testing was conducted using balloons and a 5L beaker. The beaker was initially filled with water, the balloon filled with CO2 for approximately 3 seconds, and then placed in the beaker to determine displacement. The following attachment contains the trials, averages, and flow rate calculations.



Conclusions/action items:

Use the flow rate calculations to determine how long the CO2 valve should be open for in order to fill the box with 5% CO2 at ~14PSI.



[Download](#)

Flow_Rate_Calculations_-_Sheet1.pdf (56.1 kB)



4/5/2022 DC Motor Circuitry and Prelim Code

Katie Day - Apr 06, 2022, 3:23 PM CDT

Title: DC Motor

Date: 4/5/2022

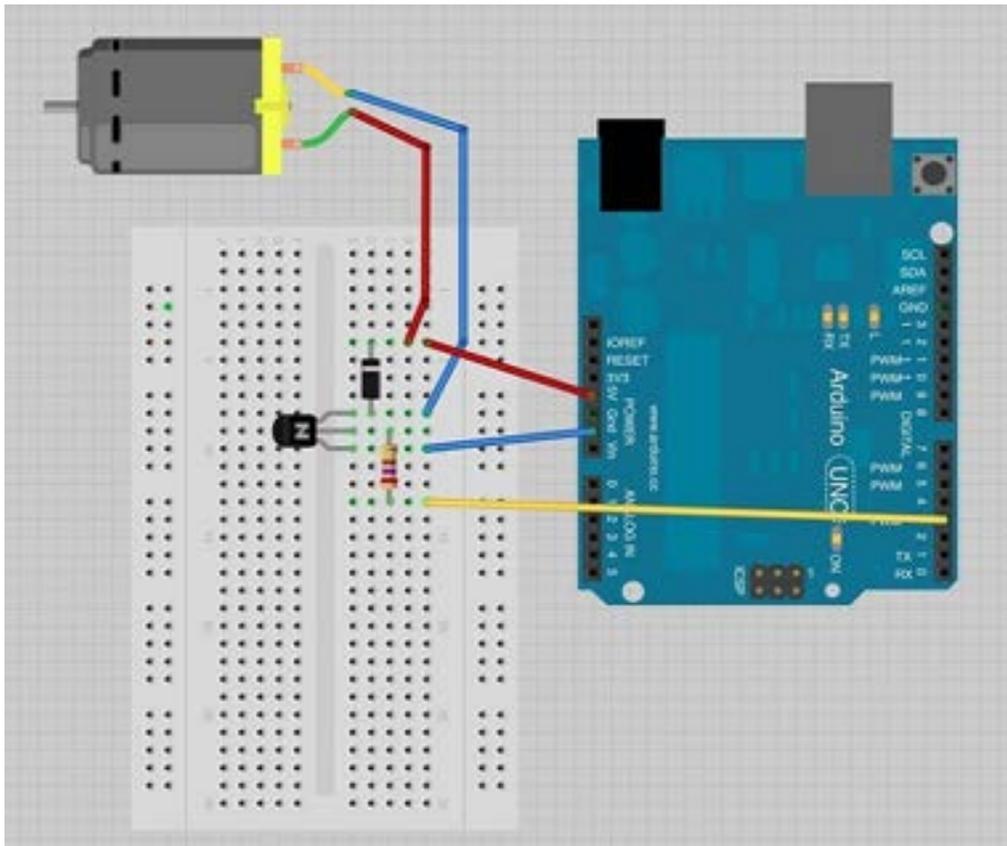
Content by: Katie Day

Present:

Goals: To build a working circuit and code a working DC motor so that it turns clockwise for three seconds, and counterclockwise for 3 seconds.

Content:

Circuit Diagram



Code:

```
const int pwm = 2 ; //initializing pin 2 as pwm
const int in_1 = 8 ;
const int in_2 = 9 ;
//For providing logic to L298 IC to choose the direction of the DC motor

void setup() {
  pinMode(pwm,OUTPUT) ; //we have to set PWM pin as output
  pinMode(in_1,OUTPUT) ; //Logic pins are also set as output
  pinMode(in_2,OUTPUT) ;
}

void loop() {
  //For Clock wise motion , in_1 = High , in_2 = Low
  digitalWrite(in_1,HIGH) ;
  digitalWrite(in_2,LOW) ;
  analogWrite(pwm,255) ;
}
```

```
/* setting pwm of the motor to 255 we can change the speed of rotation
by changing pwm input but we are only using arduino so we are using highest
value to driver the motor */
//Clockwise for 3 secs
delay(3000) ;
//For brake
digitalWrite(in_1,HIGH) ;
digitalWrite(in_2,HIGH) ;
delay(1000) ;
//For Anti Clock-wise motion - IN_1 = LOW , IN_2 = HIGH
digitalWrite(in_1,LOW) ;
digitalWrite(in_2,HIGH) ;
delay(3000) ;
//For brake
digitalWrite(in_1,HIGH) ;
digitalWrite(in_2,HIGH) ;
delay(1000) ;
}
```

Conclusions/action items:

The DC motor circuit works.

Action Items:

- **3D print the motor attachment**
- **Test to see if it is strong enough to turn the valve on the CO2 tank**



4/11/2022 Incubation Chamber Fabrication

Katie Day - Apr 11, 2022, 8:25 PM CDT

Title: Incubation Chamber Fabrication

Date: 4/11/2022

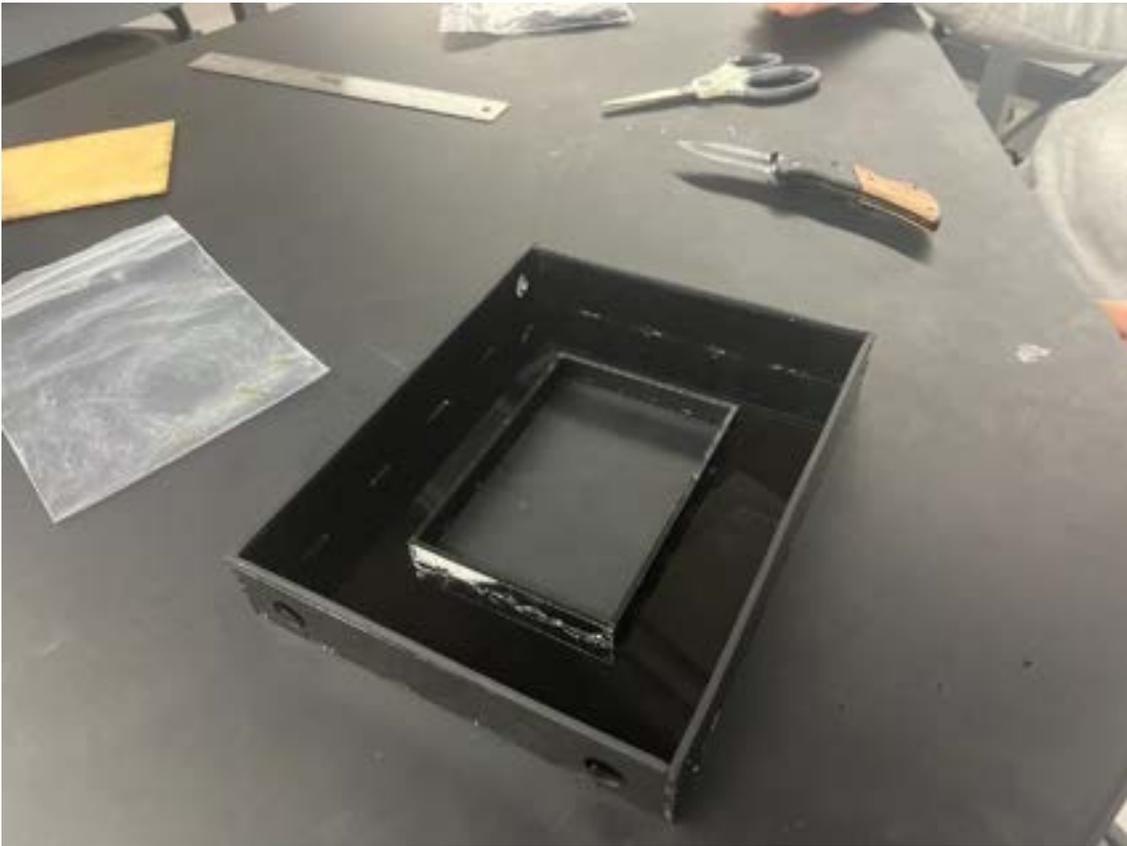
Content by: Katie Day and Sam Bardwell

Present:

Goals: To fabricate, glue, and attach all elements of the incubation chamber.

Content:

See photos. The rubber lining was also added to the top.





Conclusions/action items:

Seal the box using caulk, file a bigger hole for the NDIR sensor, and consider spraying with an adhesive to ensure water tight.



4/21/2022 Completed Arduino Code

Katie Day - Apr 21, 2022, 12:42 PM CDT

Title: Completed Arduino Code

Date: 4/21/2022

Content by: Katie Day

Present:

Goals: To put all of the separate electronic elements onto one circuit and use one code to display all necessary values and perform all necessary functions.

Content:

See attached file.

```
//Combined Arduino Code for Temp, Hum, and CO2

//Concentration
#include <SoftwareSerial.h>
#include <NDIR_SoftwareSerial.h>

//Select 2 digital pins as SoftwareSerial's Rx and Tx. For example, Rx=2 Tx=3
NDIR_SoftwareSerial mySensor(2, 3);
double percent = mySensor.ppm/10000;

// temperature variables
int ThermistorPin = 0;
int Vo;
float R1 = 10000;
float logR2, R2, T, Tc, Tf;
float c1 = 1.009249522e-03, c2 = 2.378405444e-04, c3 = 2.019202697e-07;
float e_s;
float e_d;
float Td = 36.1;

//DC motor variables
const int pwm = 4;
const int in_1 = 8;
const int in_2 = 9 ;
//For providing logic to L298 IC to choose the direction of the DC motor

void setup()
{
  Serial.begin(9600);

  if (mySensor.begin()) {
    Serial.println("Wait 10 seconds for sensor initialization...");
    delay(10000);
  } else {
    Serial.println("ERROR: Failed to connect to the sensor.");
    while(1);
  }
  pinMode(pwm,OUTPUT) ; //we have to set PWM pin as output
  pinMode(in_1,OUTPUT) ; //Logic pins are also set as output
  pinMode(in_2,OUTPUT) ;
}

void loop() {
// Temperature
Vo = analogRead(ThermistorPin);
```

```

R2 = R1 * (1023.0 / (float)Vo - 1.0);
logR2 = log(R2);
T = (1.0 / (c1 + c2*logR2 + c3*logR2*logR2*logR2));
Tc = T - 271.15;
Tf = (Tc * 9.0) / 5.0 + 32.0;
float hum =0;
e_s = 6.11 * pow(10, ((7.5 * Tc)/(237.7 + Tc)));
e_d = 6.11 * pow(10, ((7.5 * Td)/(237.7 + Td)));
hum =exp((17.625*5.2)/(243.04+5.2))/exp((17.625*Tc)/(243.04+Tc)); //rel humidity

```

```

Serial.print("Temperature: ");
Serial.print(Tf);
Serial.print(" F; ");
Serial.print(Tc);
Serial.println(" C");
Serial.print("Relative Humidity: ");
Serial.print((hum*1000)-30);
Serial.println("%");
delay(1000);

```

```
//Concentration
```

```

if (mySensor.measure()) {
  Serial.print("CO2 Concentration is ");
  Serial.print(mySensor.ppm);
  Serial.println(" ppm");
  Serial.print("CO2 Percentage is ");
  Serial.print((mySensor.ppm/10000));
  Serial.println("%");
} else {
  Serial.println("Sensor communication error.");
}
delay(1000);

```

```
//DC Motor
```

```

if (mySensor.ppm < 60000){
  //For Clock wise motion , in_1 = High , in_2 = Low
  digitalWrite(in_1,HIGH) ;
  digitalWrite(in_2,LOW) ;
  analogWrite(pwm,255) ;
  /* setting pwm of the motor to 255 we can change the speed of rotation
  by changing pwm input but we are only using arduino so we are using highest
  value to driver the motor */
}
if (mySensor.ppm > 60000){
  //For Anti Clock-wise motion - IN_1 = LOW , IN_2 = HIGH
  digitalWrite(in_1,LOW) ;
  digitalWrite(in_2,HIGH) ;
}else{
  //For brake
  digitalWrite(in_1,HIGH) ;
  digitalWrite(in_2,HIGH) ;
}
}

```

Conclusions/action items:



[Download](#)

Coding_Spring_22.ino (2.81 kB)



4/5/2022 Humidity Testing

Katie Day - Apr 06, 2022, 3:16 PM CDT

Title: Humidity Testing

Date: 4/5/2022

Content by: Katie Day

Present:

Goals: To test the accuracy of the humidity formula against the DHT22 humidity sensor.

Content:

The DHT22 and Thermistor both measured the humidity in ECB 1002 at ambient temperatures for 5 minutes. The resulting values and means were then compared via a t-Test.

See attached files.

Conclusions/action items:

There is no statistical significance between the DHT22 and Thermistor.

Katie Day - Apr 06, 2022, 3:16 PM CDT



[Download](#)

Misty_final_data.csv (1.75 kB)

Katie Day - Apr 06, 2022, 3:16 PM CDT



[Download](#)

Humidity_Test.csv (380 B)

4/5/2022 Temperature Testing (along with incubator Humidity Testing)

Katie Day - Apr 06, 2022, 3:18 PM CDT

Title: Temperature Testing

Date: 4/5/2022

Content by: Katie Day

Present:

Goals: To complete the testing protocols in order to determine the accuracy of the thermistor against the incubator in the teaching lab.

Content:

See attached files.

Conclusions/action items:

There is no statistical significance between the thermistor and the incubator readings.

Katie Day - Apr 06, 2022, 3:20 PM CDT

Internal Environment - Temperature and Humidity Sensor Test Protocol

Introduction
 Name of Test: April Day
 Name of Test Performance: 4/5/2022
 Size of Test Performance: 600 x 1000

Explanation
 The goal will be employing a sensor inside the incubator in order to measure the internal temperature. The measurements of the humidity and temperature will be obtained by an AHT1010 I2C Analog compatible sensor. The user will test to make sure that the code and the AHT1010 are working correctly by obtaining the sensor and then confirming its accuracy in steady state and precision in a dynamic range using a thermistor. To calibrate the sensor, the user will use resistance values of the Analog Resistor. Once the sensor is calibrated, its accuracy will be tested by first measuring the temperature and humidity of the working environment to gauge if they are both working as expected, and then measuring its temperature at various high and low temperatures. Afterwards, the user will measure the temperature inside the incubator with a thermistor and the sensor. To keep the incubator completely sealed, the thermistor probe and humidity probe will be inserted into the incubator and held through the glass. The user will be consistent in recording if the sensor values within 1% of the thermistor temperature.

Step	Protocol	Verification/Validation	Pass/Fail	Initial or Final
1	Calibrate the sensor using resistance values of Analog Resistor	• Verified Comments	Pass	IS
2	Test the precision of the AHT1010 sensor under a constant high and low temperature. Heat a cup of water in a microwave for two minutes. Place the sensor in the cup of hot water and allow the temperature to stabilize. Remove the finger from the heat. Then place the sensor in the freezer and observe the temperature change. Because the digital I2C sensor takes three reads, it is verified.	• Verified Comments	Pass	IS
3	Set up the incubator to control and set up a digital thermistor within the system.	• Verified Comments		

[Download](#)

Katie_Temperature_Humidity_Testing.pdf (93.2 kB)

Katie Day - Apr 06, 2022, 3:20 PM CDT



[Download](#)

Temp_final_data.csv (673 B)



[Download](#)

Temp_final_data.csv (673 B)



4/21/2022 Whole Incubator Temperature and Humidity Testing

Katie Day - Apr 26, 2022, 9:04 PM CDT

Title: Incubator Temperature and Humidity Testing

Date: 4/21/2022

Content by: Katie Day, Maya Tanna, Bella Raykowski, Drew Hardwick, and Sam Bardwell

Present:

Goals: To test the internal environment of the incubator in regards to temperature and humidity.

Content:

- Temperature had an average temperature of 37.6°C, the dip in the graph represents turning the heated water pump down from it's warm up temperature of 40°C to slightly below 34°C.
- Humidity testing was successful on the second try, after the formula was re-calibrated in the Arduino code. The results showed an average of 97.1% over the tested time interval.

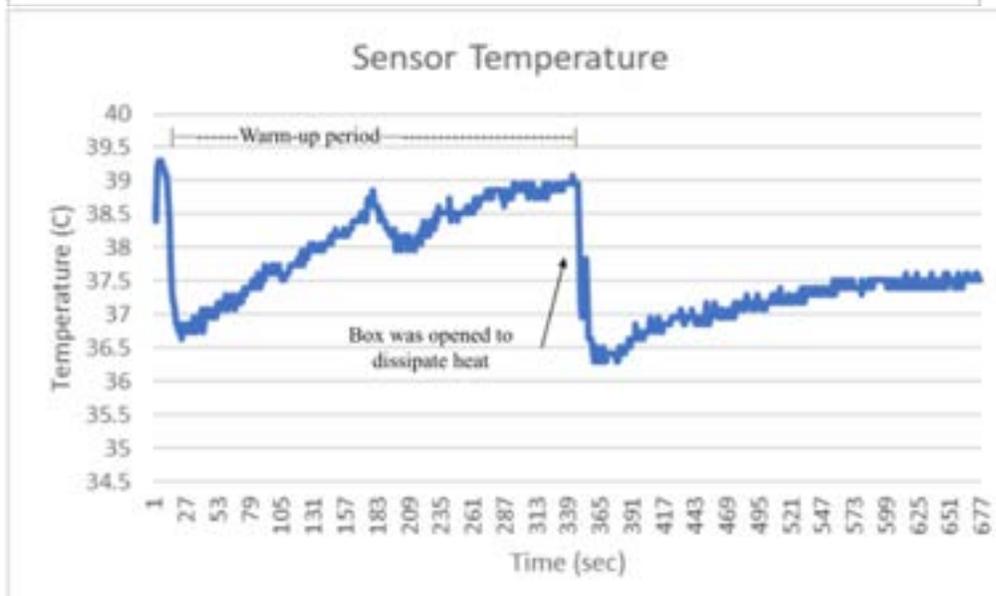
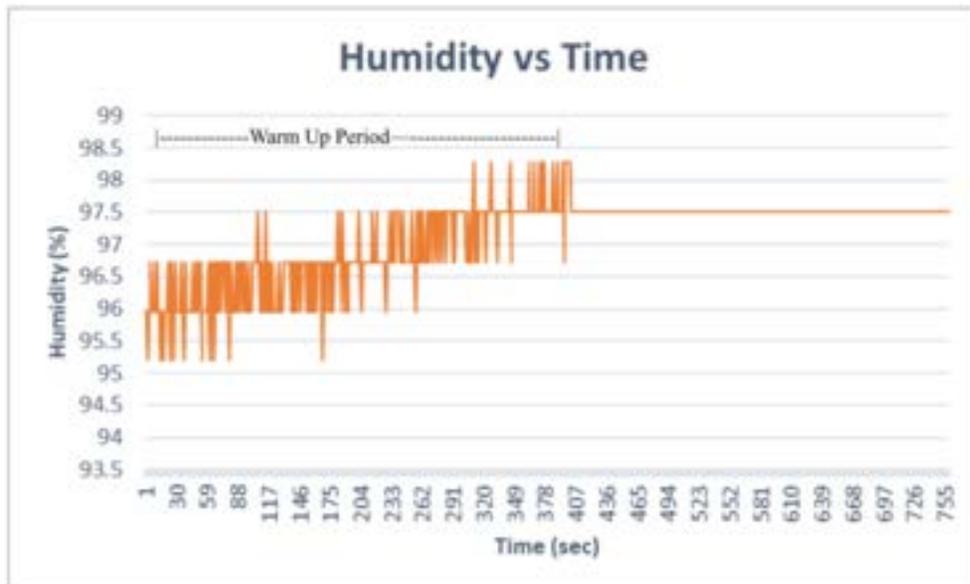


Figure 1: Sensor Humidity Results
Sensor Temperature Results


Figure 2:

See attached for raw data

Conclusions/action items:

Complete recovery testing.

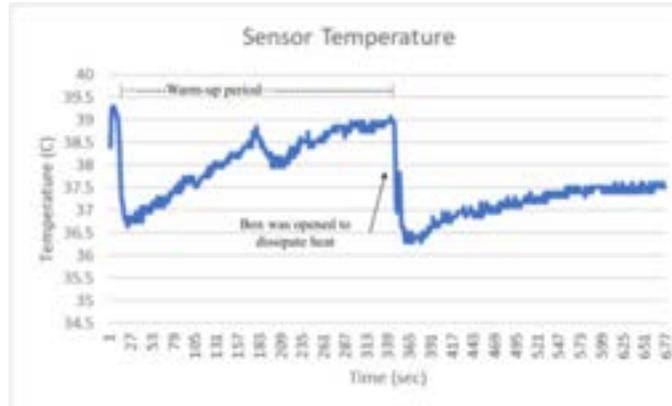Katie Day - Apr 26, 2022, 9:04 PM CDT



[Download](#)

Sensor_temp_graph.png (74.9 kB)

Katie Day - Apr 26, 2022, 9:04 PM CDT



[Download](#)

Sensor_hum_graph.png (84.9 kB)

Katie Day - Apr 26, 2022, 9:04 PM CDT



[Download](#)

Incubator_temp_testing.csv (20.1 kB)



The image shows a screenshot of an Excel spreadsheet. The title bar at the top reads "Sheet1: hum_final_data". The spreadsheet content is mostly obscured by a large, semi-transparent watermark that says "Download". A vertical column of data points is visible on the left side of the spreadsheet, appearing as a list of small, illegible text entries.

[Download](#)

hum_final_data.xls (60.4 kB)



[Download](#)

hum_final_data.csv (4.86 kB)



4/26/2022 Recovery Testing

Katie Day - Apr 26, 2022, 9:04 PM CDT

Title: Recovery Testing

Date: 4/26/2022

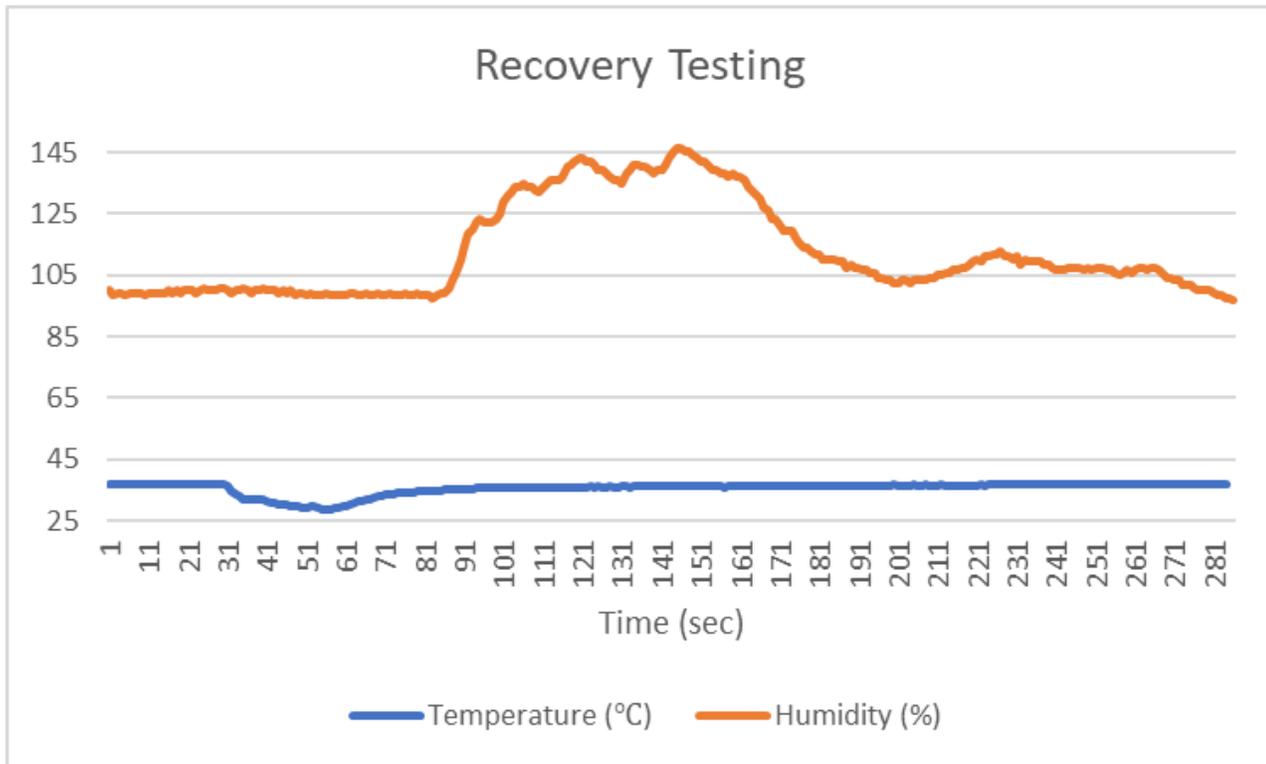
Content by: Katie Day, Maya Tanna, and Bella Raykowski

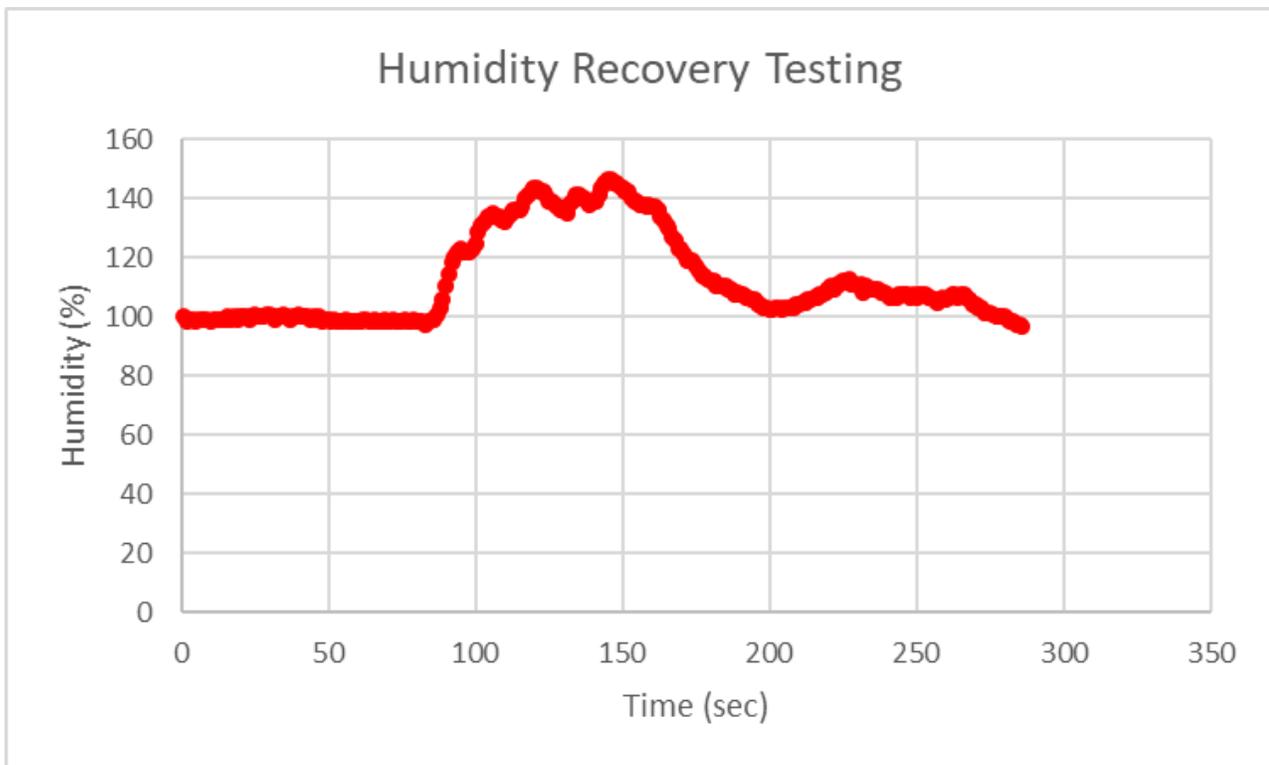
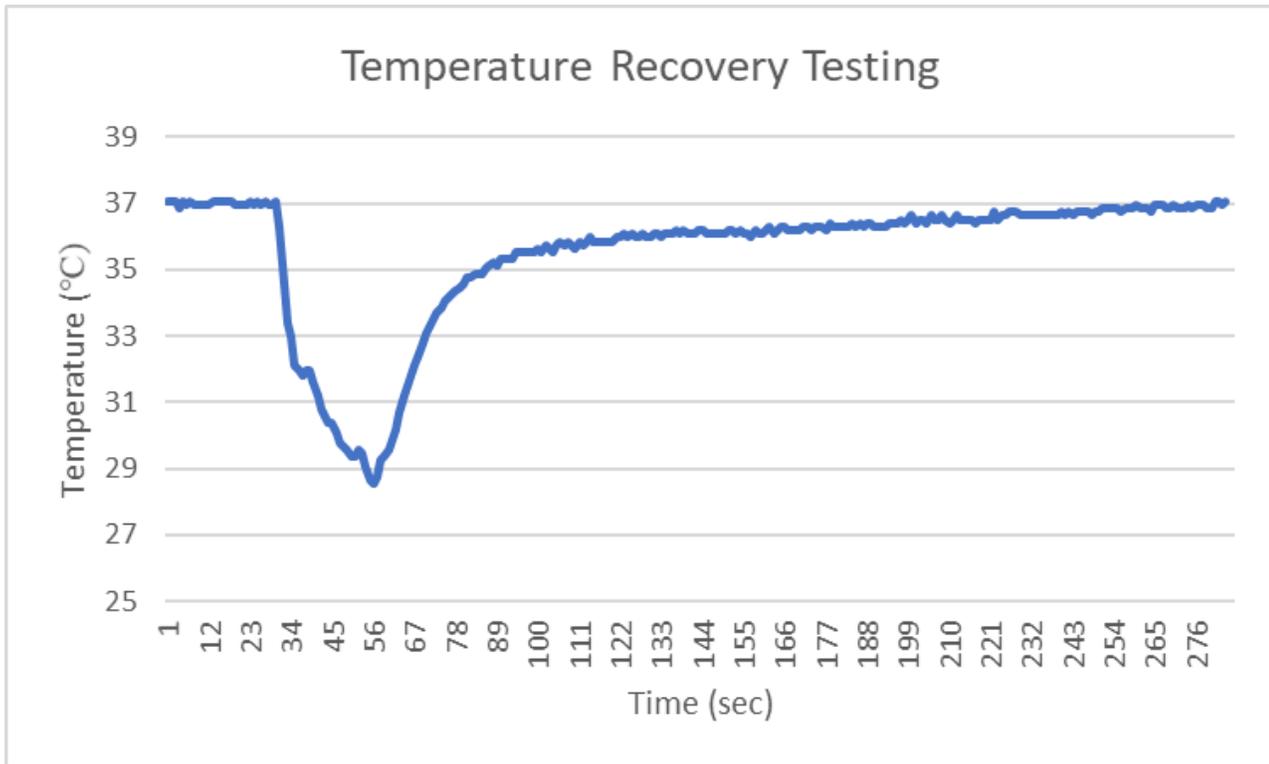
Present: Whole Group

Goals: To determine the amount of time it takes the incubator to return to standard temperature and humidity after opening the box for a short amount of time.

Content:

See attached files.





Conclusions/action items:

The box meets the requirements outlined in the PDS, with an average recovery time of 3:30 per 30 seconds of disruption.

Recovery Test Protocol Test 1

Introduction:
 Name of Tester: Mayra B. Hahn
 Date of Test Performance: 04/26/2022
 Site of Test Performance: ECR 1002

Objectives:
 The goal was to determine the recovery time of the incubator after it has been exposed by turning heating it down for the incubator to return to performance conditions (27°C, 94% RH, and 100% humidity). The maximum recovery time should not exceed 30 minutes after a 30 second exposure to the ambient environment.

Steps	Procedures	Acceptable/Unacceptable	Pass/Fail	Tester Initials
1	Turn up the incubator for normal use. Record temperature on the commercial scale that they provide the contact ranges (27°C, 94%RH, and 100% humidity).	☑️ correct Comments: 27.0°C, 94.2%RH	Pass	MDM
2	Close the incubator for 30 seconds. Manually verify that the chamber is working.	☑️ correct Comments:	Pass	MDM
3	Record temperature with the digital scale in 30 seconds after opening the incubator. Verify that the chamber could be returned from the ambient conditions specified above.	☑️ correct Comments: 27.1°C, 94%RH	Pass	MDM
4	Close the incubator. Verify that the chamber should not exceed 3 minutes after a 30 second exposure to the ambient environment. Record the time it took to return back to normal conditions for the chamber.	☑️ correct Comments: It took a little over 3 mins to recover from the temperature and humidity.	Pass	MDM

[Download](#)

Maya_Katie_Bella_Recovery_Testing.pdf (66.7 kB)



[Download](#)

Recovery_Data.xlsx (35.7 kB)



9/11/22 Solenoid Valve Principles

Katie Day - Dec 10, 2022, 2:48 PM CST

Title: Solenoid Valve Principles

Date: 9/11/2022

Content by: Katie Day

Present:

Goals: To understand the technical principles behind solenoid valves so that I may code for them better.

Content:

Technical Principles of Valves


- Used for controlling fluid flow automatically
- control units that when electrically energized or de-energized either open or close fluid flow --> works as an electromagnet to pull a plunger against a spring.
- Cycle periods
 - Solenoid valves can cycle for 2,5,10, or 30 minutes.
- Flow rate is determined by the design and type of flow.
- Coding
 - Always consists of a capital letter for Omega Valves
- O. Engineering, "Technical principles of valves," <https://www.omega.com/en-us/>, 09-Apr-2020. [Online]. Available: <https://www.omega.com/en-us/resources/valves-technical-principles>. [Accessed: 11-Sep-2022].

What is a solenoid valve and how does it work?

- Pilot operated: use system line pressure to open and close the valve body
- Direct operated: directly open or close main valve
 - used in systems with low flow capacities and low pressure
- Consists of a coil, plunger, and sleeve
- Standards: NAMUR Solenoid Valve
- Burkert Fluid Control Systems, "How a solenoid valve works: Definition of a solenoid valve," *How a Solenoid Valve Works | Definition of a Solenoid Valve*, 2022. [Online]. Available: <https://www.burkert-usa.com/en/Company-Career/What-s-New/Press/Media/Technical-Reports/Technical-Reports-additional-topics/What-is-a-solenoid-valve-and-how-does-it-work#:~:text=Solenoid%20valves%20consist%20of%20a,raises%20the%20plunger%2C%20enabling%20flow>. [Accessed: 11-Sep-2022].

How Solenoid Valves work

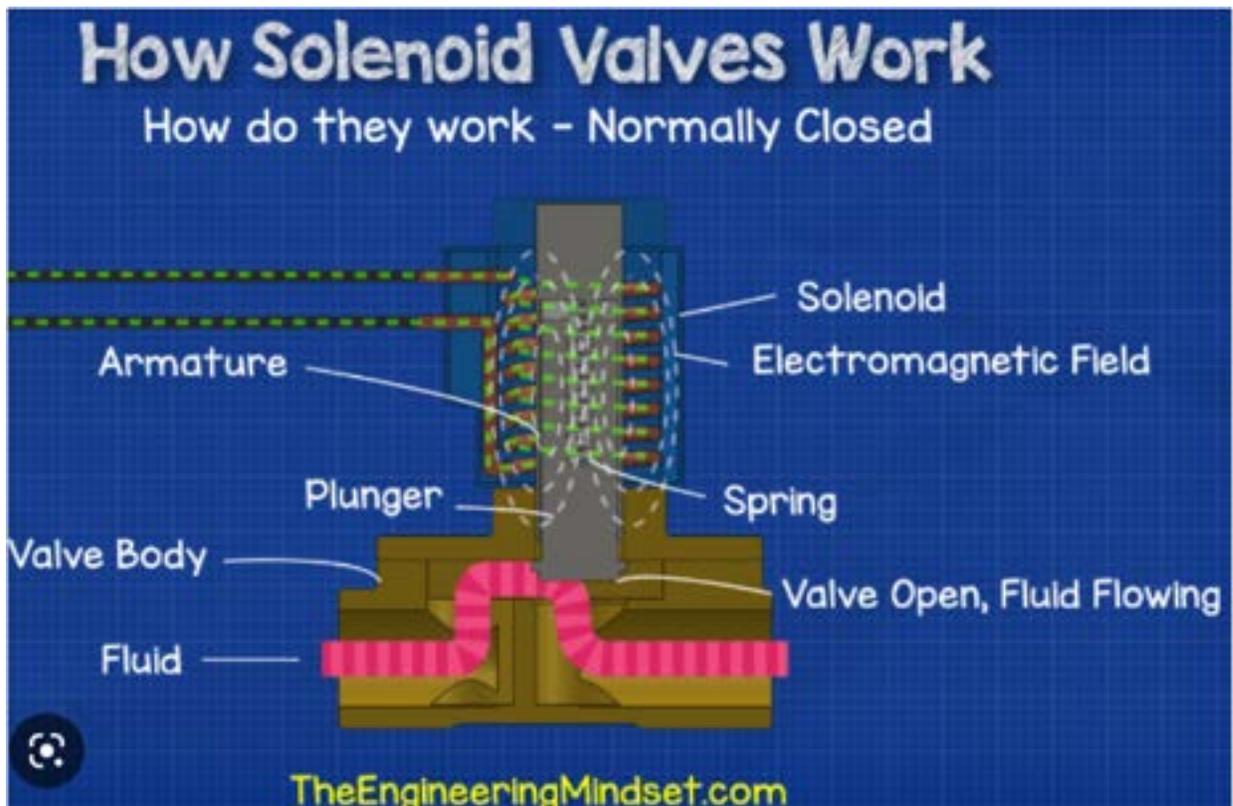- Magnetic tool app tests if the valve is working properly
- Convert electric to mechanical energy
- Normally closed type
 - Armature, solenoid, valve body
 - Armature contains plunger and spring which sits in a down position to close it
 - When electrocurrent does it the current causes the plunger to move upwards
 - Strongest
- Normally open
 - Spring pushes the plunger down unless powered on
- Direction of current determines whether there is a pushing or pulling motion



-
- TheEngineeringMidset, *How Solenoid Valves Work - Basics actuator control valve working principle*. YouTube, 2019.

Conclusions/action items:

Discover if a normally open or normally closed solenoid valve would be best.

Comments

Amit Nimunkar

Dec 10, 2022, 2:42 PM CST

Graphics to help understand the concepts would be useful.



9/11/ 22 Coding

Katie Day - Sep 11, 2022, 5:13 PM CDT

Title: Coding Research for Solenoid valves

Date: 9/11/2022

Content by: Katie Day

Present:

Goals: To understand the Arduino tutorial for coding a solenoid valve.

Content:

Refer to the following articles and videos.

1. <https://bc-robotics.com/tutorials/controlling-a-solenoid-valve-with-arduino/>

1. C. BCR, "Controlling a solenoid valve with Arduino," *BC Robotics*, 02-Dec-2021. [Online]. Available: [https://bc-robotics.com/tutorials/controlling-a-solenoid-valve-with-arduino.](https://bc-robotics.com/tutorials/controlling-a-solenoid-valve-with-arduino/) [Accessed: 11-Sep-2022].

2. https://www.youtube.com/watch?v=ioSYlxHIYdI&ab_channel=Tinker%26Build

1. Build & Tinker, *Arduino Solenoid Valve Circuit: How to control water flow with an Arduino*. YouTube, 2017.

Conclusions/action items:

Figure out which solenoid valve would be best for our project and find a 12V DC power supply.



9/13/22 Waterproofing applications

Katie Day - Sep 21, 2022, 4:56 PM CDT

Title: Waterproofing applications

Date: 9/13/2022

Content by: Katie Day

Present:

Goals: To determine different methods to reduce condensation on the glass in order to approve optics.

Content:

- Lens Cleaning Solution - Grainger
 - Anti-fog
 - Anti-static
 - Non-silicone formula
 - 16 fl oz
 - hazardous
 - Physical and chemical properties
 - Physical form: liquid
 - Color: clear
 - BP: 100 C
 - pH: 7
 - Relative density: 1
 - Water solubility: soluble
 - Vapor pressure: 30 torr at 25C
 - Flash point: 40.6 C in a closed unit
- Fog Gone - Optix 55
 - anti fog
 - Used for polycarbonate lensesn
 - polarized coting
 - hypoallergic
 - "all natural" --> no properties sheet
- Fog Defender System - Zeiss
 - Anti fog
 - Lasts 72 hours
 - Comes with microfiber cloth
 - leaves thin film on the lens
 - less than 3% of alcohol
 - Safe to use on polycarbonate
 - Ingredients: water, proprietary detergents and preservatives
 - sheerness has a 4.3/5

Conclusions/action items:



9/20/22 How to Make Electrically Conductive Glass

Katie Day - Sep 20, 2022, 4:28 PM CDT

Title: How to Make Electrically Conductive Glass

Date: 9/20/22

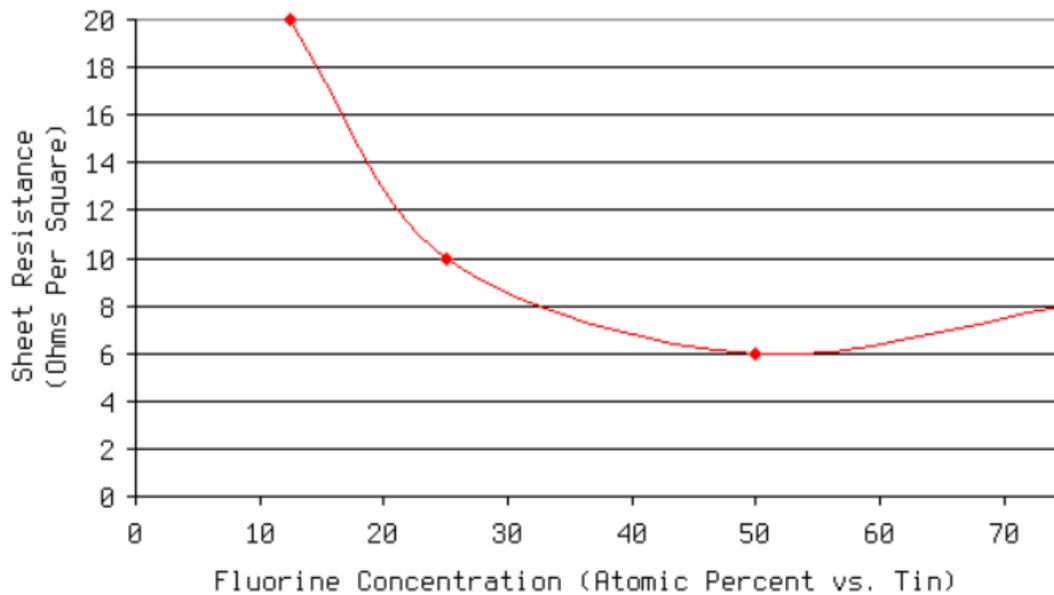
Content by: Katie Day

Present:

Goals: To figure out how to make electrically conductive glass.

Content:

- Simplifier
 - Need:
 - Solution
 - 30 mL Distilled Water
 - 3384mg Stannous Chloride
 - 214mg Ammonium Bifluoride
 - HCL added dropwise until the solution becomes clear
 - Heat source
 - Air spray cannister
 - Heat glass to roughly 350-400°C
 - Use 10mL of above solution to spray uniformly onto the heated glass
 - After the solution is evaporated there is a thin, strong, transparent layer of fluorine-doped tin oxide
 - NOTE: DO THIS OUTSIDE (we do not set fire to the lab again :0)



-
- Tin Oxide conductive Glass
 - Stannous Chloride
 - Isopropyl alcohol
 - Crest toothpaste
 - Instructions
 - abrase the glass with the toothpaste
 - Clean the glass with soapy water
 - Wash off with alcohol
 - Stack two pieces of glass with glass spacers between it
 - Put a small pile of stanneous chloride on one end of the glass
 - put in kiln and heat to 400°C
 - Disadvantages: has a thin rainbow film around it.

Conclusions/action items:



9/22/2021 Materials

Katie Day - Sep 23, 2021, 9:55 AM CDT

Title: Material Research

Date: 9/22/2021

Content by: Katie McGovern

Present:

Goals: To discover materials that are both insulators and transparent.

Content:

- **Mechanical Properties of Zirconia Re-inforced Lithium Silicate Glass-Ceramic**
 - Zirconia: enhanced mechanical properties of all-ceramic restorations
 - Lithium disilicate ceramic restoration
 - fabricated with a heat-pressed or CAD/CAM fabrication processes
 - enhanced translucency and different shades of lithium disilicate makes feasible anatomically contoured monolithic restorations --> displays a bluish color


Materials	Fracture Toughness (MPa m ^{0.5})	Flexural Strength (MPa)	Characteristic Strength (MPa)	Weibull Modulus	Elastic Modulus (GPa)	Hardness (GPa)	Brittleness index (um ^{-1/2})
VS (Zirconia reinforced lithium silicate glass-ceramic)	2.31	443.63	460.74	13.41	70.44	6.53	2.84
IC(Lithium disilicate glass-ceramic)	2.01	348.33	361.82	12.49	60.61	5.45	2.72

- Conclusions
 - The VS zirconia reinforced lithium silicate glass-ceramic revealed higher mechanical properties (fracture toughness, flexural strength, elastic modulus, and hardness) compared with IC lithium disilicate glass-ceramic
 - According to Weibull distribution, VS glass-ceramic appears to be reliable for clinical use; however, clinical assessment is required to give reliable recommendations for dental practitioners
 - IC glass-ceramic revealed lower brittleness index compared with VS glass-ceramic and hence, IC glass-ceramic may have superior machinability.
- **Optically Transparent Thermally Insulating Silica Aerogels for Solar Thermal Insulation**
 - silica based aerogels coated on black surfaces have the potential to act as simple and inexpensive solar thermal collectors because of their high transmission to solar radiation and low transmission to thermal radiation
 - VTSS technology
 - places a selective surface inside a vacuum to limit convective and conductive losses --> cost of maintenance is high
 - OTTI coating: transparent to solar radiation and opaque to IR
 - transmits sunlight to absorber while reducing the reradiation and convection heat losses from the hot absorber to the ambient

- silica aerogels are mostly absorptive in thermal IR spectrum
- absorption spectra of silica and other gaseous constituents such as H₂O and CO₂


• Aligned Cellulose/Nanodiamond plastics with high Thermal COnductivity

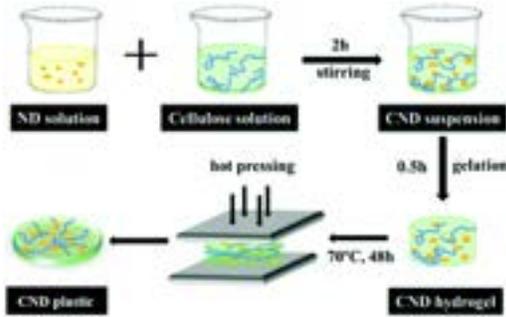- Plastic: orderly layered structure which cellulose is highly oriented along the in-plane direction and Nanodiamond disperses effectively to form an orderly connection with cellulose due to hydrogen bonding
- Thermal conductivity = 5.37 Wm⁻¹K⁻¹ at 5 wt% filler content



• Examining the ROle of Atomic Scale Heterogeneity on the Thermal COnductivity of Transparent, Thermally Insulating Mesoporous Silica-Titania Thin Films

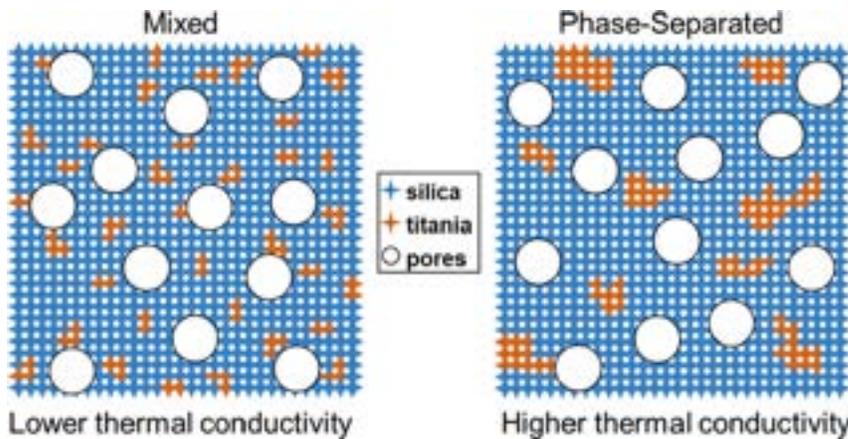- Crystalline materials are often good conductors bc their long range atomic-scale order facilitates heat carrier propagation via lattice vibrations
- Adding titania to silicate matrix lowers the thermal conductivity of the matrix as a result of introducing additional heat-carrier scattering centers
- Materials that are the most chemically homogeneous with the most distributed scattering sites were more efficient at reducing heat carrier transport



• Thermally Insulating Nanocellulose-Based Materials

- Nanocellulose: rod-like partially crystalline cellulose nanoparticles with diameters between 3-50nm and lengths from 100-several um, feature a combo of low density, high emodulus, low thermal expansion coefficient, and flexible surface chemistry

◦ image

- Figure: the modes of heat transport in porous materials. Heat transfer by a) convection, b) radiation, c) gas conduction, including the coupling effects at the gas-solid interface, and d) solid conduction, highlighting diffuse and specular photon scattering at interphases

- Replacement of air with water through moisture uptake of hygroscopic materials (wood, cellulose, and CNMs) usually results in an increase of the heat conduction bc water has higher thermal conductivity that air

- Table 1: Thermal Conductivity of cellulose-, wood-, and CNM-based films

Material	Density (kg	λ_a (mW m ⁻¹	λ_r (mW m ⁻¹	λ_a/λ_r	T	RH
----------	-------------	---------------------------------	---------------------------------	-----------------------	---	----



- Silica Aerogel 6mm Super Light Isulation Waterproof Sound deadening Mat

Conclusions/action items:

Look into greenhouse glass technology and make sure that we use a crystalline material.



10/8/2021 Optical Properties of Well Plates

Katie Day - Oct 18, 2021, 4:20 PM CDT

Title: Optical Properties of Well Plates

Date: 10/8/2021

Content by: Katie McGovern

Present:

Goals: To determine the optical properties of well plates so that they could be replicated with the incubator materials.

Content:

Optics for Testing:

- 96 Well Plates
 - Material: Polypropylene
 - Young's Modulus = 1.1-1.6
 - **Optical Properties:**
 - Gloss % = 75-90
 - Haze % = 11
 - Transparency % = 85-90

Conclusions/action items:

Replicate these conditions with the materials for the incubator design.



9/12/2021 - Cell Culture Basics

Katie Day - Sep 12, 2021, 10:43 AM CDT

Title: Cell Culture Basics

Date: 9/12/2021

Content by: Katie McGovern

Present:

Goals: To research the basics of cell cultures to better understand how to build our incubator.

Content:

- **Cell Culture: Growing Cells as Model Systems in Vitro**

- Cell culture: laboratory methods that enable the growth of cells in physiological conditions
 - most commonly used to study cell biology, replicate disease mechanisms, or investigate drug compounds
 - easy to manipulate genes and molecular pathways
 - culture systems removes interfering genetic or environmental variables
- Safe Handling of Cell Lines
 - ACDP: national body managed by the Health and Safety Executive (HSE) that advises on hazards and risks to workers from exposure to pathogens during cell cultures
 - *consult biosafety levels (BSL) 1-4.*
- Recommended Equipment for Cell Culture Labs Table 9.2

Equipment	Purpose
Biosafety Cabinet	create sterile work surface
Humid CO2 incubator	provide a physiological environment for cell growth
Inverted light microscope	to assess cell morphology and count cells
fridge/freezers	store cells and cellular materials
Centrifuge	condense cells
Hemocytometer	count cells, determine growth kinetics and prepare suitable densities
Autoclave	sterilizer
Cell culture dishes	culture cells using flasks, petri dishes, 96 well plates
Vacuum pump	aspirate cell culture medium

- Cell Cultures in Lab
 - Primary cells: directly isolated from human tissue (ex. fibroblasts from skin biopsies)
 - characterized as finite and rely on continuous supply of stocks since their proliferation ceases after a limited amount of cell divisions and cell expansion is often impossible
 - Transformed cells: can be generated either naturally or by genetic manipulator
 - Self-renewing cells: cells that carry the capacity to differentiate into a diversity of other cell types with long-term maintenance in vitro
 - ex. embryonic stem cells
- Cell Culture Microenvironment

- The Cell Culture Medium
 - create an environment that allows for max cell propagation is achieved through the **incubator (i.e. temperature, humidity, O₂, and CO₂ tensions)** and the basal cell culture medium and its supplements
 - Basal Cell culture medium: has carbs, vitamins, amino acids, minerals, growth factors, hormones, and components that control physicochemical properties such as the culture's pH and cellular osmotic pressure
 - serum as fetal bovine serum is added that provides cells with growth factors and hormones and acts as a carrier for lipids and enzymes and transportation of micronutrients and trace elements
- Temperature, pH, CO₂, and O₂ Levels
 - temp: incubated at 36-37°C
 - can be achieved though tightly regulated and monitoring the temp of the environment
 - pH: 7.2-7.4
 - As the cells propagate, their growth requires energy supplied in the medium, for example in the form of glucose. When metabolized, its by-products include pyruvic acid, lactic acid, and CO₂. Since the pH level is dependent on the balance of CO₂ and HCO₃⁻ (bicarbonate), the addition of bicarbonate-based buffers to cell culture media can equilibrate the CO₂ concentrations.
 - CO₂ tensions: 5-7% adjustable
- Subculturing
 - when cell culture vessel reaches ~80% cells need to be transferred



Figure 9.3 Basic Science Methods for Clinical Researchers. 2017 : 151–172. Published online 2017 Apr 7. doi: 10.1016/B978-0-12-803077-6.00009-6

- Applications
 - Drug Development and Drug Testing: used to screen novel chemicals, cosmetics, and drug compounds for their efficacy and asses drug cytotoxicity in cell types
 - Virology and Vaccine Production: using mammalian cells researches can study the growth rates, development, and conditions required for the cycle of infectious diseases
 - Tissue Regeneration and Transplate: cell cultures with hiPSCs, embryonic stem cells, and adult stem cells can be studied for their regeneration properties for use in replacement tissues or organs
 - Genetic Engineering or Gene Therapy: allows for the study of the expression of specific genes and their impact on cells
- [Encyclopedia Of Insects \(second Edition\) Chapter 39- Cell Culture](#)
 - Cell Culture: technique in which cells are removed from an organism and placed in a fluid medium where, under proper conditions, cells can live and even grow.
 - cell growth is characterized by mitosis and differentiation
 - Differentiation: cells can change into specific types that are capable of functions analogous to tissues or organs in the organism

Conclusions/action items:

Cells need a hospitable environment in order to be studied. Incubators are commonly used and we will have to carefully monitor the system we create.



9/12/2021 EU Cell Culture Basics Handbook

Katie Day - Sep 12, 2021, 10:32 AM CDT

Title: EU Cell Culture Basics Handbook

Date: 9/12/2021

Content by: Katie McGovern

Present:

Goals: To learn about how cell cultures work in order to create a low cost incubator

Content: The EU's Cell Culture Basics Handbook

Conclusions/action items:

1. Refer to this handbook for logistics of creating cell plates and for incubator standards.

Katie Day - Sep 12, 2021, 10:32 AM CDT



[Download](#)

CellCultureBasicsEU.pdf (4.37 MB)



9/12/2021 CO2/Cell Culture Incubator Basics

Katie Day - Oct 03, 2021, 3:30 PM CDT

Title: Cell Culture Incubator Basics

Date: 9/12/2021

Content by: Katie McGovern

Present:

Goals: To understand the physiology of an incubator in order to replicate it at a lower price.

Content:

- [Labcompare CO2/Cell Culture Incubator](#)
 - Designed to maintain a constant temp and high humidity under a CO2 atmosphere
 - Temps: 4-50°C
 - controlled by a water bath circulating cabinet or by electric coils that give off heat
 - CO2: 0.3-19.9%
 - Use non-corrosive stainless steel interiors or antimicrobial copper surfaces
 - Auto decontamination using heat or UV
 - Humidity: 95-98%
 - Features of fancy ones:
 - programmable controls with password protection
 - temp alarms
 - CO2 alarms
 - door opening alarms
- [Inexpensive low-oxygen incubators](#)
 - Oxygen tension in mammalian tissues ranges from 1-6%
 - growing normal human diploid cells in 2% O₂ extends their lifespan
 - Low Cost Incubator
 - Gas tank with O₂, CO₂, and N
 - Equipment:
 - Silicone vacuum grease
 - Nalgene 2117 Straight-side wide-mouth jars, polymethylpentene with white polypropylene screw-top lids, autoclavable
 - Size 15D silicone rubber stoppers
 - Bubble tubing
 - Procedure
 - 1▪ First drill two half-inch holes into the clear bottoms of Nalgene 1,000-ml Straight-Side Wide-Mouth Jars ([Fig. 2](#)). Although this can be done by a bioengineering department, adequate holes are produced using a home drill press and a flat 1/2-inch wood drill bit.
 - 2▪ Invert the jar so that the white plastic lid becomes the bottom of the incubator and the holes are at the top. Plug the holes with size 15D silicone rubber stoppers.

- The lid has a small bump in its center that prevents dishes from lying flat on its surface. Form a flat surface by placing the lid from a 10-cm plastic petri dish on the white lid.
- 4▪ Coat the threads of the jar with silicone vacuum grease so that it closes smoothly and forms a gas-tight seal.
- 5▪ Bubble tubing provides a very convenient means of connecting the tank to the chambers. Cut one of the expanded sections before it tapers to the small diameter, providing the tubing with a good, snug fit into one of the 1/2-inch holes in order to flush the chambers.
- 6▪ Connect to a tank containing a special three-gas mix consisting of 2% oxygen, 5% CO₂ and 93% nitrogen.
- 7▪ Chambers must be re-gassed each time they are opened to observe or feed the cells. There is no need to re-gas unopened chambers (for example, if cloning cells, they can be left for several weeks without re-gassing).
- Wright, W., Shay, J. Inexpensive low-oxygen incubators. *Nat Protoc* **1**, 2088–2090 (2006). <https://doi.org/10.1038/nprot.2006.374>
- <https://www.businesswire.com/news/home/20201009005417/en/CO2-Incubators-Market-Growth-of-Global-Life-Science-Market-to-Boost-the-Market-Growth-Technavio>

Conclusions/action items:

Determine ways in which we can build sensors to deliver CO₂ and keep the temperature and humidity in the right spots.



2/4/2022 Humidity Sensor

Katie Day - Feb 04, 2022, 4:39 PM CST

Title: Katie Day

Date: 2/4/2022

Content by: Katie Day

Present:

Goals: To research more about how to calculate humidity from temperature.

Content:

- Humidity Types
 - Absolute Humidity = total mass of water vapor/ volume of air
 - Relative Humidity = $(e/e_s) * 100$
 - $e = 6.11 * 10^{\frac{7.5T_d}{237.7+T_d}}$
 - $e_s = 6.11 * 10^{\frac{7.5T}{237.7+T}}$
 - $T_d = \frac{237.7 \log(\frac{e_s * rh}{611})}{7.5 - \log(\frac{e_s * rh}{611})}$
 - Thanks to much help from symbolab
 - $rh = 10^{\frac{20.85e_s - 9.99 \log(e_s)^2}{9.99 \log(e_s) - 7.5}}$

Conclusions/action items:

Try using this equation in code

2/22/2022 Heat Transfer for Copper and Water Bed

Katie Day - Feb 22, 2022, 12:22 PM CST

Title: Heat Transfer for Copper and Water Bed

Date: 2/22/2022

Content by: Katie Day

Present:

Goals: To try to determine how long it will take to heat up the water bed based on the thermal conductivity of copper.

Content:

See attached files. Useful links:

https://en.wikipedia.org/wiki/Copper_in_heat_exchangers

<http://www.matweb.com/tools/unitconverter.aspx?fromID=10&fromValue=118>

https://www.google.com/search?q=k+of+water&source=lmns&bih=569&biw=1280&rlz=1C1CHBF_enUS985US985&hl=en&sa=X&ved=2ahUKEwies7PF8pP2AhV1hGoFHxiRAkoQ_AUoAHoECAEQAA

<https://study.com/academy/lesson/heat-transfer-through-conduction-equation-examples.html>

Conclusions/action items:

If we heat up the water to 50°C running through the copper tubing than the water bath will hit 37°C within 7.5minutes.

Katie Day - Feb 22, 2022, 12:23 PM CST



[Download](#)

heat_transfer.pdf (535 kB)



9/9/22 Affordable Solenoid Valve Options

Katie Day - Sep 09, 2022, 1:02 PM CDT

Title: Affordable Solenoid Valve Options

Date: 09/09/2022

Content by: Katie Day

Present:

Goals: To discover affordable solenoid valves for the use in CO2 monitoring.

Content:

- Solenoid Air Control Valve: 110V AC, Solenoid / Spring, 7.28 cfm Max. CFM - Valves
 - \$66.22
 - 5-way/2-position
 - 110 V AC
 - 15-105 psi
 - normally open

- Solenoid Air Control Valve: No Coil, Solenoid / Spring, 1/8 in Pipe Size, 0 to 150 psi
 - \$65.55
 - 3-way/2-position
 - No coil
 - 0-150 psi
 - normally closed

Conclusions/action items:



9/20/22 Conductive Glass

Katie Day - Dec 10, 2022, 3:07 PM CST

Title: Conductive Glass

Date: 9/20/2022

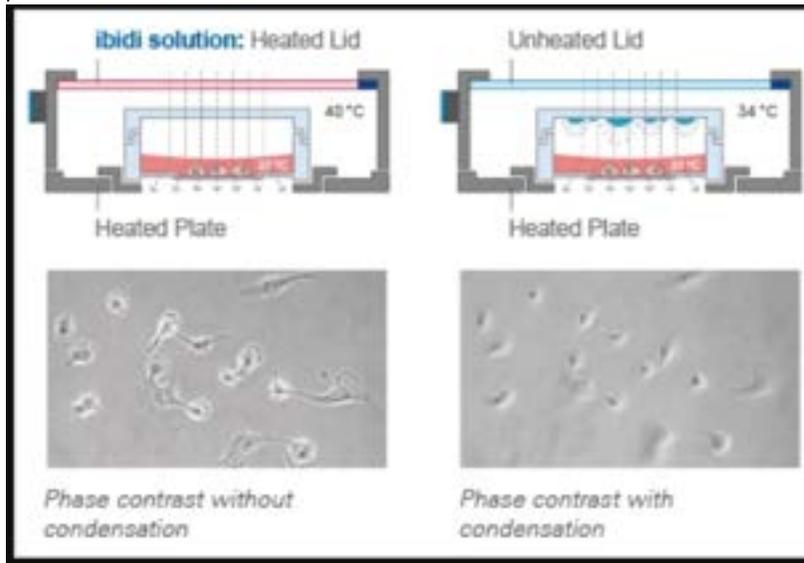
Content by: Katie Day

Present:

Goals: To determine the electronic basis behind conductive glass and competing design techniques.

Content:

- **ibidi Stage top incubator**
 - create a vertical temperature gradient by heating the lid to a temp higher than the plate
 - prevents condensation





- "Ibidi stage top incubator Multiwell Plate, CO2 – Silver Line: Live Cell Imaging," *ibidi*, 2021. [Online]. Available: https://ibidi.com/stage-top-incubators/288-ibidi-stage-top-incubator-multiwell-plate-co2-silver-line.html#heating_system. [Accessed: 10-Dec-2022].

- **Heatvision**
 - Electrically heated glass = treated glass with a transparent electrically conductive coating
 - electric current passes through cables on coating



- "HeatVision® electrically heated glass for all your needs," *HeatVision®*, 02-Nov-2022. [Online]. Available: <https://heatvision.info/>. [Accessed: 10-Dec-2022].

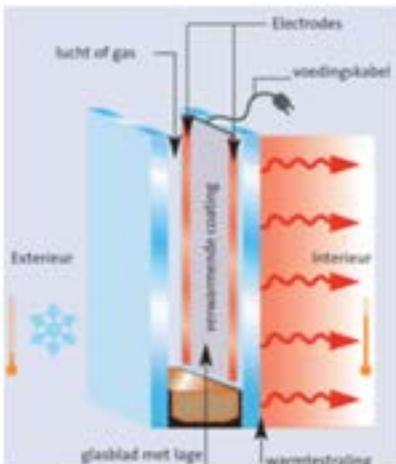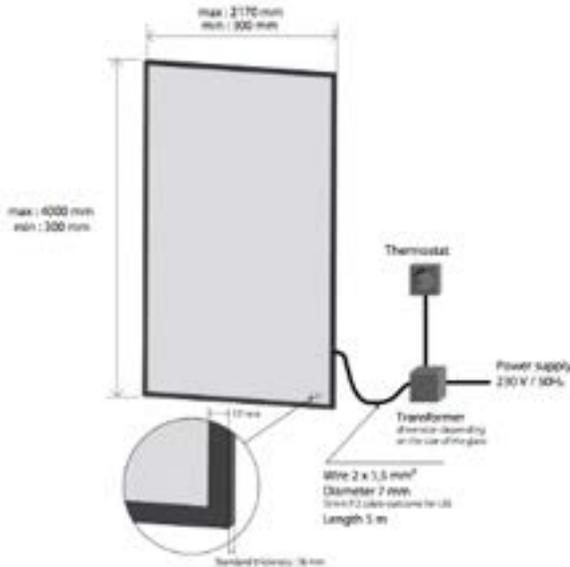- o Raises temp beyond the dew point to prevent condensation
- o Voltage: 230V - 50Hz
- o power 100-600W/m²
- **Smartfilmplus**
 - o Coating conducts light like float glass
 - o heat loss reduced to 30%
 - o Coating made of metal oxides
 - o Anticondensation:
 - Works over 30°C
 - 100-300 W/m²
 - "Electrically heated glass," *Smartfilmplus*, 10-Dec-2020. [Online]. Available: <https://smartfilmplus.com/solutions/electrically-heated-glass/>. [Accessed: 10-Dec-2022].
- **New Glass Tech**
 - o Transparent and optimal light transmission
 - o Reduction of low level ventilation
 - o Glaze is clear and transparent
 - o reduction of mould on the frame
 - o Heat surface = low-emissivity glass that when stimulated by electrodes a thin oxide coating over the inner face on the side of the vacuum filled with argon radiates heat
 - o Anticondensation: 50-150 W/m²
 - o Surface temp: 20-65°C



- o "Thermo Heat Glass," *New Glass Tech*, 2022. [Online]. Available: <https://www.newglasstech.com/?page=product&cat=Specialities&product=thermo-guard&lang=en>. [Accessed: 10-Dec-2022].

o **Conclusions/action items:**

Comments

Amit Nimunkar

Dec 10, 2022, 2:39 PM CST

Please make sure to provide references for the figures not belonging to you.



10/26/22 Flow Rate Testing - Copy

Katie Day - Oct 27, 2022, 10:59 AM CDT

Title: Flow Rate Testing

Date: 10/26/22


Content by: Sam and Katie

Goals: To determine the flow rate of CO₂ out of the solenoid valve when the take is set to 17 psi.

Content:

- First we set the CO₂ tank to output at a 17 psi pressure
- Then we set the solenoid code to be open for 1 second
- We attached a balloon to the end of the tubing and ran the code. This filled up the balloon with 1 second of CO₂ gas.
- We obtained a 1L beaker from the lab and filled it up with 550 mL of water
- Then we dunked the balloon into the water, and measured the displacement in order to obtain the volume of gas in the balloon.
- We repeated this for 5 balloons and averaged the amount of mL of gas output in 1 second.
- Since we have the volume of gas outputted from the solenoid in 1 second, we were able to figure out the flow rate of gas from the CO₂ tank, through the solenoid valve in mL/s

Time = 1 sec		Initial Volume = 550 mL	
Trial	Total mL	Flow rate (mL/sec)	
1	850	300	
2	900	350	
3	900	350	
4	850	300	
5	925	375	
		Average = 335 mL/s	
Incubator Volume = 1759.55 mL		5% = 87.98	
		Time = 0.26 seconds	

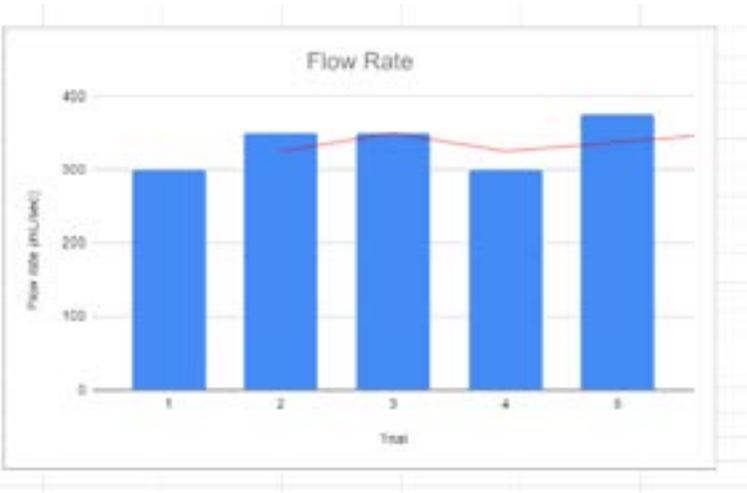

- Using the inner volume of the incubator and understanding that we need 5% CO₂ levels, We calculated how many mL 5% is (87.98). Since we have the flow rate, we can open the solenoid for 0.26 seconds in order to input 5% CO₂ into the incubator when it originally had 0% CO₂.



Figure 1: Photo of the filled balloons after the solenoid being opened for one second. Also shown is the beaker with water.



Figure 2: Solenoid flow testing set up to collect the CO2 output.

Conclusions/action items:

The next steps are to use this information to include it into a code that connects CO2 sensor information to the solenoid. This will allow the solenoid to automatically input the correct amount of CO2 into the incubator box when needed.



11/18/22 I2C NDIR

Katie Day - Nov 18, 2022, 1:59 PM CST

Title: I2C NDIR Research

Date: 11/18/22

Content by: Katie Day

Present:

Goals: To determine how to write I2C for the NDIR Sensor in Arduino.

Content:

See Attached links for library.

https://www.youtube.com/watch?v=inVmjXzm2zk&ab_channel=vizlerelektronika

<https://sandboxelectronics.com/?p=1126>

https://github.com/SandboxElectronics/NDIR/tree/master/NDIR_I2C

Conclusions/action items:

Meet with Dr. Nimunkar to determine how to apply the code to the solenoid valve.



09/26/2022 Solenoid Valve initial coding

Katie Day - Dec 10, 2022, 2:49 PM CST

Title: Solenoid Valve initial coding

Date: 09/26/2022

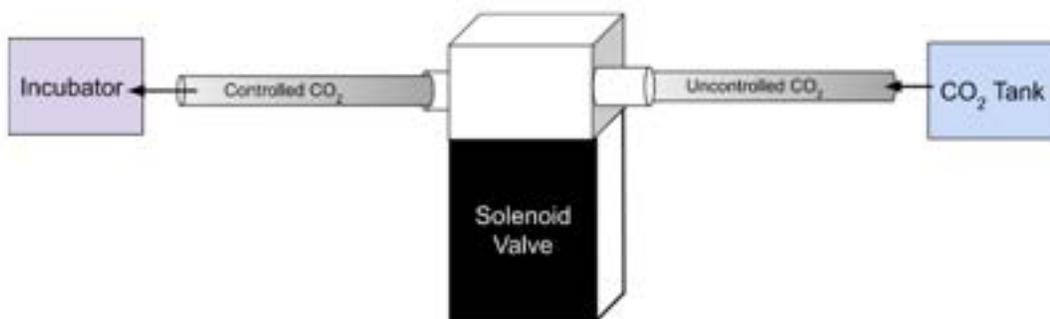
Content by: Katie Day

Present:

Goals: to begin to write code for the solenoid valve.

Content:

See attached file.



Description of code: Upon sending a High or Low signal to the valve it opens for a specific amount of time.

Conclusions/action items:

Test the code.

Katie Day - Sep 26, 2022, 2:10 PM CDT



[Download](#)

SolenoidValve.ino (324 B)

Comments

Amit Nimunkar

Dec 10, 2022, 12:03 PM CST

A flowchart of brief description for the code would be helpful.

Amit Nimunkar

Dec 10, 2022, 2:44 PM CST

Graphics to help understand the concepts would be useful.



09/26/2022 Updated whole sensor code

Katie Day - Dec 10, 2022, 2:25 PM CST

Title: Updated whole sensor code

Date: 9/26/2022

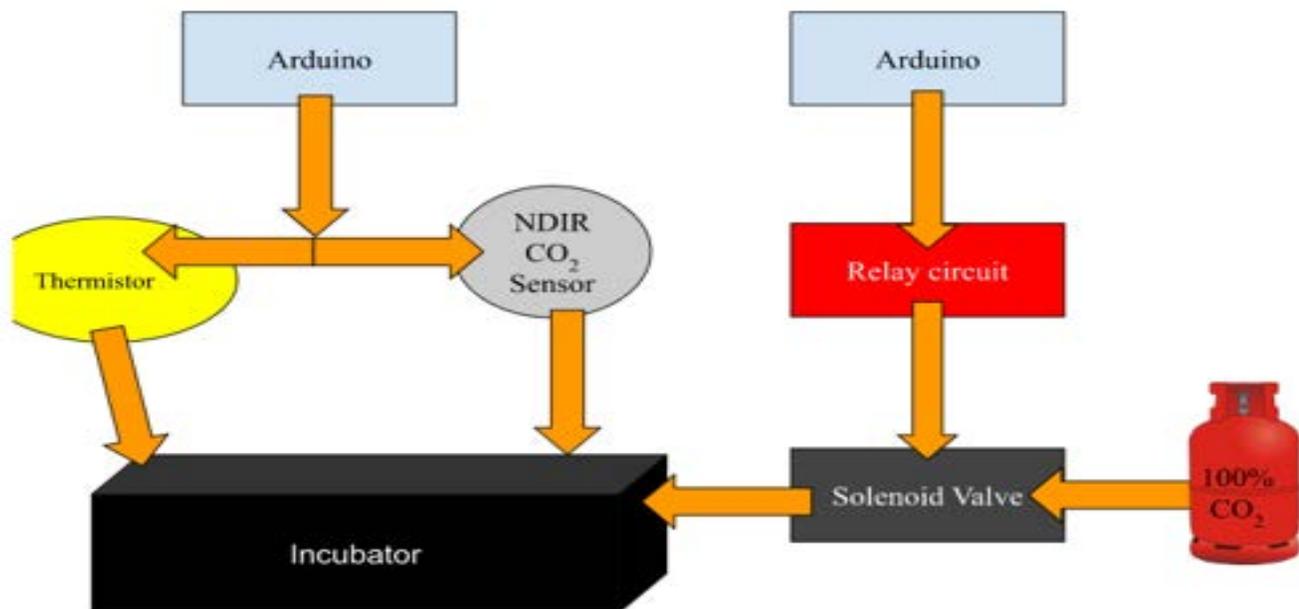
Content by: Katie Day

Present:

Goals: To update the whole sensor code with the solenoid valve config.

Content:

See attached file.



Description of Code: Approximately every minute, the temperature, humidity, and CO2 values are read and outputted onto serial monitor. The Solenoid valve opens if CO2 value is <4.5% and closes when CO2 is >5.5%.

Conclusions/action items:

Test the code to see if it works.

Comments

Amit Nimunkar

Dec 10, 2022, 12:04 PM CST

A flowchart of brief description for the code would be helpful.

Katie Day - Sep 26, 2022, 2:12 PM CDT



[Download](#)

Coding_Spring_22.ino (2.33 kB)



10/19/22 Temperature Homogeneity Testing Code

Katie Day - Oct 19, 2022, 7:43 PM CDT

Title: Temperature Homogeneity Testing Code

Date: 10/19/2022

Content by: Katie Day

Present:

Goals: To present the code for Homogeneity Testing.

Content:

See Attached file.

Conclusions/action items:

Test the code and record results in excel file.

Katie Day - Oct 19, 2022, 7:49 PM CDT



[Download](#)

Temp_Homo.ino (792 B)



10/19/22 CO2 Homogeneity Testing Code

Katie Day - Oct 19, 2022, 7:50 PM CDT

Title: CO2 Homogeneity Testing Code

Date: 10/19/2022

Content by: Katie Day

Present:

Goals: To present the code for CO2 Homogeneity Testing.

Content:

See Attached file.

Conclusions/action items:

Test the code and record results in excel file.

Katie Day - Oct 19, 2022, 7:50 PM CDT



[Download](#)

CO2_Homo.ino (1.14 kB)



10/20/22 Solenoid Valve Functionality Testing

Katie Day - Oct 20, 2022, 2:14 PM CDT

Title: Solenoid Valve Functionality Testing

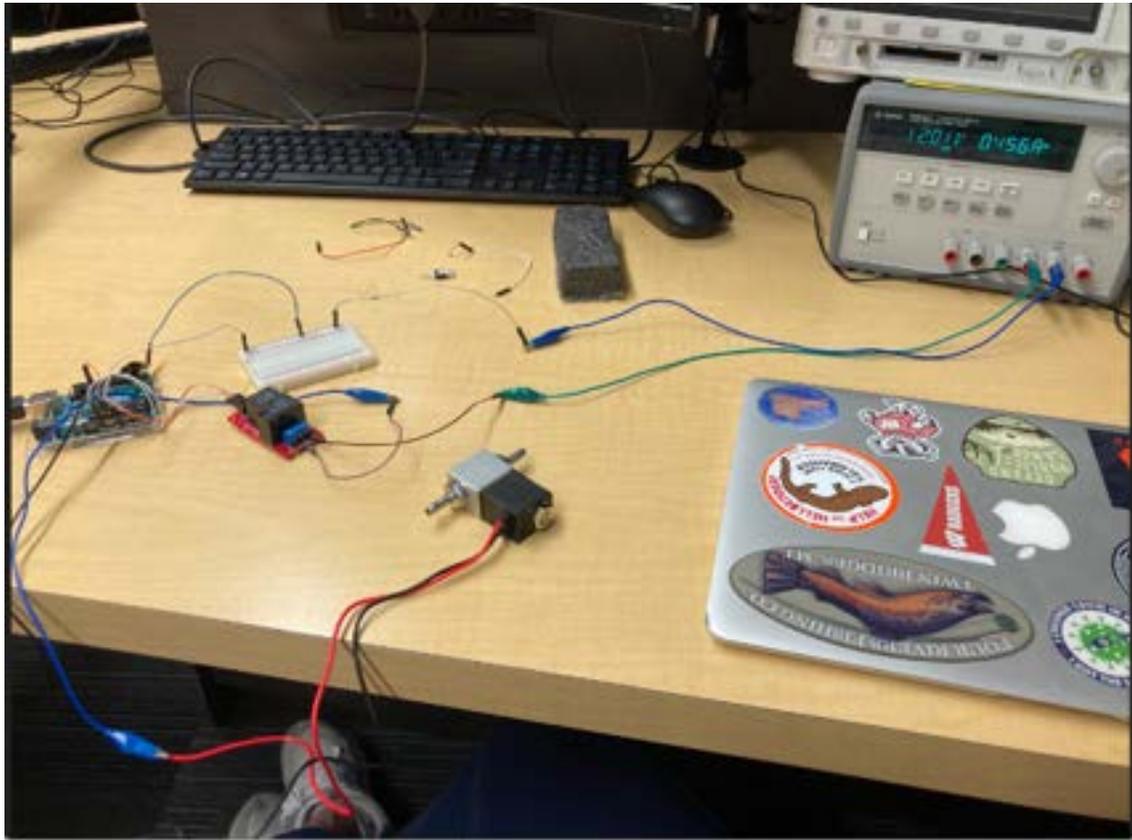
Date: 10/20/2022

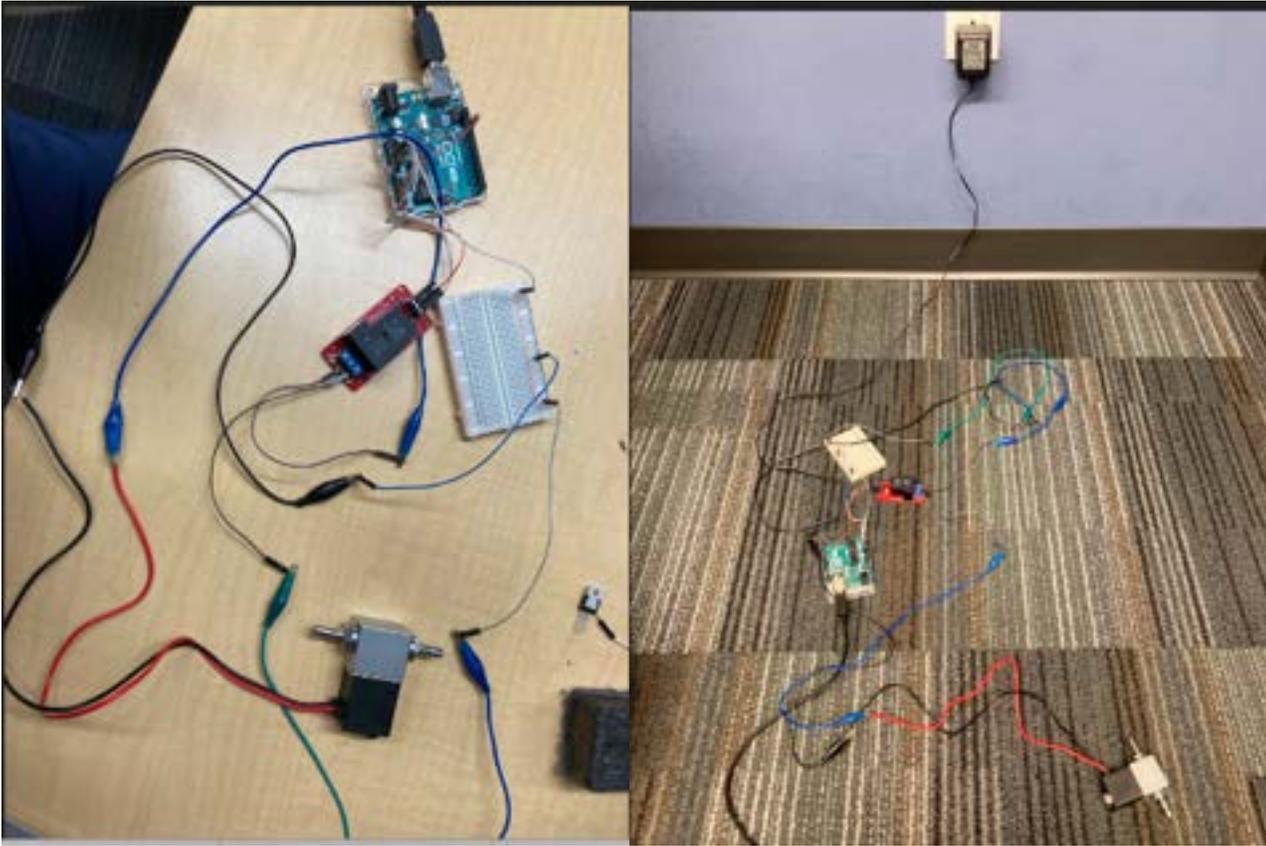
Content by: Katie Day

Present: Katie Day and Drew Hardwick

Goals: To test the functionality of the solenoid valve and determine which power source is right for us.

Content:





See Attached File for Code.

Followed Protocol from BME 201 Lab 7.

Relay circuit connections

You will be performing this activity as a group. Note: many of these connections have been made for you. Refer to Figure 14.

1. Obtain one glass bioreactor, Beefcake Relay, power receptacle cable, Rocker switch, heating element and heating element connector for the entire group from your TA. **In this section you will be making connections between the Beefcake Relay and wall power, please make sure to show your circuit to the TA before connecting the receptacle to the wall power. Do not connect your heating element today.**
2. You will be building some part of this circuit on the breadboard (namely connection to Arduino, Rocker switch and LED will be made on the breadboard). We will be testing the functionality of your circuit. This circuit will be later transferred to your project box. Refer to Figure 14 and identify the Hot (Black or other colors), Neutral (White) and Ground (Green) wires in your wall power cable which is a standard of the National Electrical Code (NEC) and should be followed in your wiring as well.
 1. Hot (**black/brown**): provides the 120V AC current source from the wall.
 2. Neutral (**white/blue**): provides the return path for the current provided by the hot wire
 3. Ground (**green**): earth ground to allow current to flow ground in case of an electrical short.

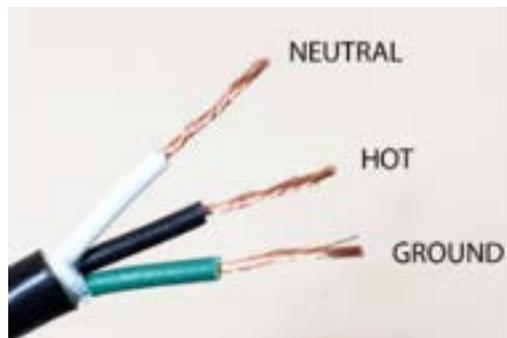


Figure 14. The Hot (Black), Neutral (White) and Ground (Green) wires in a US wall power cable [NEC].

Figure 15. Connections between the Beefcake Relay, wall power, Rocker switch and Arduino.

Note: Have your circuit checked BEFORE connecting to wall power.

The HEATING ELEMENTS become extremely HOT!!! Do NOT leave them on while they are on top of any surface. Do NOT touch them while they are on. They must be wrapped securely around a filled bioreactor bottle with bare wire when they are plugged in. The water acts as a heatsink and prevents overheating.

You will NOT plug the heating elements in today.

Relay circuit and thermistor testing

Now that your bioreactor control system is nearing completion, it is time to test some of the individual components together before connecting them to your bioreactor.

9. In place of the Heating Element, use one multimeter, set it to V (Volt) and insert it into the Female electrical receptacle connector - 2 prong holes: COM to Neutral/large hole and V to the Hot/small hole.

CAREFUL - Be sure your hands are not touching any metal as you insert the multimeter test leads all of the way in. Do NOT connect your bioreactor control system to wall power until an SA/TA checks your connection.

10. Code to convert voltage output from the thermistor circuit into temperature value using calibration curve equation from Arduino I Lab if you have not already done so.
11. Set your code to a temperature set point above room temperature ~ 25 °C (feel free to use another multimeter here with a temperature probe)
12. Turn on your rocker switch - your relay should click on and the LED should turn on indicating that the temperature is below the set point (if it does not - do NOT proceed and check with an SA/TA)
13. Plug your bioreactor control system into wall power
14. Check that your multimeter reads 110-125 V AC (if it does not - do NOT proceed and check with an SA/TA)
15. Check the system is working
 1. Hold the thermistor between your fingers and watch your temperature reading rise
 2. When the temperature reaches the set point +/- an acceptable margin of error, the LED should turn off and the relay should click off and the multimeter being used in place of the heating element should turn off
 3. Release the thermistor and watch the temperature drop
 4. When the temperature reaches the set point +/- an acceptable margin of error, the LED should turn on and the relay should click on and the multimeter being used in place of the heating element should turn on
16. Repeat the step above (a-d) several times
17. Record your methods and results in your notebook to demonstrate that your bioreactor control system properly turns on/off power to the heating elements receptacle.

References

- [1] J.G. Webster, J. *Bioinstrumentation*, (Wiley 2003)
- [2] J. G. Webster, and A .J. Nimunkar, Ed., *Medical Instrumentation: Application and Design* (Wiley, New York, 2020)
- [3] S. Arar, "An introduction to digital signal processing - technical articles," *An Introduction to Digital Signal Processing*, 30-Jun-2021. [Online]. Available: <https://www.allaboutcircuits.com/technical-articles/an-introduction-to-digital-signal-processing/>. [Accessed: 20-Oct-2022].
- [4] N. Seidle, "Controllable Power Outlet," *Sparkfun*, 02-Dec-2008. [Online]. Available: https://www.sparkfun.com/tutorials/119?_ga=2.228417371.795773219.1666285857-1001601635.1666285857. [Accessed: 20-Oct-2022].

Conclusions/action items:

Test the solenoid valve's control over CO2 in the incubator.

Katie Day - Oct 20, 2022, 2:06 PM CDT



[Download](#)

SolenoidValve.ino (492 B)



10/20/22 UPDATED_ CO2 Homogeneity Testing Code

Katie Day - Oct 20, 2022, 2:07 PM CDT

Title: Updated CO2 Homogeneity Testing Code

Date: 10/20/2022

Content by: Katie Day

Present:

Goals: To reconfigure the code for CO2 homogeneity control based on solenoid valve functionality.

Content:

See Attached file.

Conclusions/action items:

Test the code and record results in excel file.

Katie Day - Oct 20, 2022, 2:09 PM CDT



[Download](#)

CO2_Homo.ino (1.29 kB)



11/3/22 CO2 and Solenoid Relay Communication Codes

Katie Day - Nov 03, 2022, 2:48 PM CDT

Title: Updated CO2 Homogeneity Testing Code

Date: 10/20/2022

Content by: Katie Day

Present:

Goals: To allow for the CO2 code and the solenoid valve code to communicate with each other.

Content:

See Attached file.

Conclusions/action items:

Test the code and record results in excel file.

Katie Day - Nov 03, 2022, 2:49 PM CDT



[Download](#)

CO2_Homo.ino (978 B)

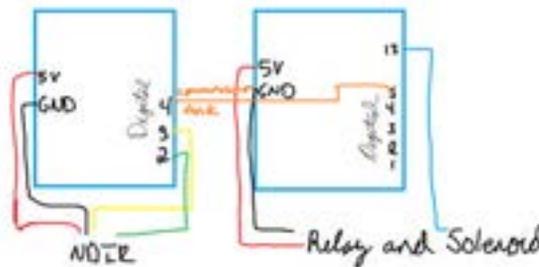
Katie Day - Nov 03, 2022, 2:49 PM CDT



[Download](#)

SolenoidValve.ino (712 B)

Katie Day - Nov 03, 2022, 3:04 PM CDT



[Download](#)

Solenoid_and_NDIR_Relay.png (29.1 kB)



11/10/22 NDIR Calibration Data

Katie Day - Nov 17, 2022, 12:06 PM CST

Title: NDIR Calibration Data

Date: 11/10/22

Content by: Katie and Drew

Present:

Goals: To recalibrate the NDIR to standard.

Content:

See attached data files.

Conclusions/action items:

With an offset of 2.2 the NDIR should read correctly.

Katie Day - Nov 17, 2022, 12:07 PM CST



[Download](#)

CO2_Calibaration.csv (1.51 kB)

Katie Day - Nov 17, 2022, 12:07 PM CST



[Download](#)

CO2_Regulation.csv (1.57 kB)



11/17/22 NDIR with Lightbulb Testing

Katie Day - Nov 17, 2022, 12:12 PM CST

Title: NDIR with Lightbulb Testing

Date: 11/17/22

Content by: Katie Day

Present:

Goals: To determine if the NDIR Sensor works with a lightbulb.

Content:

See photos.

Conclusions/action items:

The NDIR sensor does not work when connected to other appliances.

Katie Day - Nov 17, 2022, 12:12 PM CST



[Download](#)

69040104658__DB6202AE-8647-424A-BB6C-EBB9EFF398AE.HEIC (2.71 MB)

Katie Day - Nov 17, 2022, 12:12 PM CST



[Download](#)

IMG_7932.HEIC (5.4 MB)

Katie Day - Nov 17, 2022, 12:12 PM CST



[Download](#)

IMG_7931.HEIC (1.91 MB)

Katie Day - Nov 17, 2022, 12:12 PM CST



[Download](#)

IMG_7930.HEIC (2.31 MB)



11/17/22 FINAL CO2 AND SOLENOID CODE

Katie Day - Nov 17, 2022, 2:26 PM CST

Title: Final Co2 and Solenoid Code

Date: 11/17/22

Content by: Katie Day

Present:

Goals: To determine a code for CO2 and the Solenoid.

Content:

By measuring the time and the flow rate I was able to determine two for loops that work for the solenoid valve that output approximately enough CO2 per percentage to keep the Co2 between 4.5-5.5%.

Conclusions/action items:

See code.

Katie Day - Nov 17, 2022, 2:26 PM CST



[Download](#)

sol_test.ino (907 B)

Katie Day - Nov 17, 2022, 2:26 PM CST



[Download](#)

CO2_test.ino (702 B)

Katie Day - Dec 05, 2022, 9:16 AM CST



[Download](#)

Coding_Spring_22.ino (1.73 kB)



11/30/2022 CO2 Testing

Katie Day - Nov 30, 2022, 5:16 PM CST

Title: CO2 Testing

Date: 11/30/2022

Content by: Katie Day

Present: Katie Day and Drew Hardwick

Goals: To test the accuracy of the hardcoded solenoid valve at keeping the incubator at 5% +/- 1%.

Content:

Followed CO2 Testing Protocol. See attached files and images.

Conclusions/action items:

The solenoid valve is able to regulate CO2 and can be used in Live-Cell Testing.

Katie Day - Nov 30, 2022, 5:16 PM CST

[Download](#)

Hard-code_test.csv (73.5 kB)

Katie Day - Nov 30, 2022, 5:16 PM CST

[Download](#)

Custom_Data_-_2022-11-30_-_Recording_1.csv (7.91 kB)



12/12/2022 Concluding Thoughts

Katie Day - Dec 12, 2022, 5:21 PM CST

Title: Concluding Thoughts

Date: 12/12/2022

Content by: Katie Day

Present:

Goals: Outline what I did this semester.

Content:

Motivation: To create a way to see the internal environment of the incubator using sensors and regulate the input of CO₂ in order to keep cells alive.

Work: Created code for all sensors. Found code for solenoid valve. This semester we were able to measure the homogeneity of the incubator using the sensors.

Future work: Use I²C to communicate with NDIR sensor and solenoid valve. Create a display.

Conclusions/action items:



02/01/2022 Preventing Cell Culture Contamination with Copper CO2 Incubators

MAYA TANNA - Feb 01, 2022, 9:26 PM CST

Title: Preventing Cell Culture Contamination with Copper CO2 Incubators

Date: 02/01/2022

Content by: Maya

Present: Maya

Goals: To document findings from this interesting article on copper incubator systems

Content:

Findings

- Copper inhibits the growth of lots of different microorganisms (bacteria, fungi, algae, and yeast)
 - Ions bind to contaminant and disrupt key proteins/processes
- Copper acts as a microcide - antibacterial only in the presence of glucose and oxygen
 - Reduces bacteria/algae in cooling systems/towers
 - Plumbing pipes reduce bacteria
 - Aquacides and pesticides reduce several other organisms
- Copper in incubators
 - Reduces microbes in a wide variety of equipment
 - Copper wire/sulfate significantly inhibit microbial growth
 - Reduce spread of contaminants
 - Proven antimicrobial properties

Cite: A. Dippel, "APN_LECT_PRECON_1007.qxd," p. 2.

Conclusions/action items: I don't think this would be that useful for where we're at in the project currently, but it was a cool article to read and interesting to learn about full-on copper incubator systems. It's different from our project because we're just trying for copper tubing rather than the whole incubator be copper. This could definitely be a cool thing to consider in future years though to prevent contamination across the whole system.



[Download](#)

Flyer-Heracell-cu-AN-LECO2-PRECON-11071.pdf (235 kB)



02/01/2022 Thermal Properties of Copper

MAYA TANNA - Feb 01, 2022, 9:51 PM CST

Title: Thermal Properties of Copper

Date: 02/01/2022

Content by: Maya

Present: Maya

Goals: To document specifications from this article on the thermal properties of copper

Content:

Findings

- Copper is soft, malleable (able to be bent with a hammer), and ductile (able to deform without losing toughness)
 - Has a very high conductivity (thermally and electrically)
- Melting point is 1084.62 C, boiling point is 2562 C
- Thermal conductivity of Copper is 401 W/(m*K)
 - Thermal conductivity is a measure of a substance's ability to transfer heat through a material via conduction
 - Need to use Fourier's Law for any calculations (works for any state of matter)
- Coefficient of thermal expansion is 16.5 $\mu\text{m}/(\text{m}^*\text{K})$
 - Thermal expansion is the tendency of matter to change its dimensions in response to a change in temperature
- Density is 8.92 g/cm³

**Important formulas to use for thermal calculations are included in the article

Cite: "Copper - Thermal Properties - Melting Point - Thermal Conductivity - Expansion," *Material Properties*, Nov. 01, 2020.

<https://material-properties.org/copper-thermal-properties-melting-point-thermal-conductivity-expansion/> (accessed Feb. 01, 2022).

Conclusions/action items: We are going to switch our tubing to copper, which is why this research is necessary. However, we may need to do more calculations this semester in order to verify that heat is being distributed evenly throughout the entire incubator system, so these equations and specifications were important to look at.



02/06/2022 Ensuring CO2 Function

MAYA TANNA - Feb 06, 2022, 10:15 AM CST

Title: Ensuring CO2 Function

Date: 02/06/2022

Content by: Maya

Present: Maya

Goals: To document information on how to ensure that CO2 sensors are reading gas values and functioning normally

Content:

Findings

- Avoid contamination and don't use antibiotics/antimycotics - instead, improve sterile techniques and come up with a system to regularly clean the incubator
- Main source of incubator contamination is the entry of microorganisms through the access door/entry region
 - Wear gloves
 - Minimize the time the entry pathway is open
 - Wipe the entry pathway with 70% ethanol
 - Change out water weekly
- Need to keep CO2 levels at 5% to maintain the cell medium at a physiological pH
 - Even though CO2 sensors aim to maintain the desired CO2 level, the calibration may shift over time from the set point
 - Easiest and most accurate method to measure CO2 is a gas analyzer - Fyrite instrument (can also measure O2 if needed)
 - Downside: way too expensive
 - Automatically zero the sensor monthly
- Temperature requirement of 37 C
 - Check with a calibrated thermometer - open the outer and inner incubator doors and tape the thermometer to the inside of the glass door so the temperature can be read from the outside when the glass door is closed
- Humidity requirement of 95-100%
 - Keep water in the tray on the bottom of the incubator
 - Downside: potential source of contamination

Cite: May 20 and 2013, "How to Make Sure Your CO2 Incubator Is Working Properly." <http://www.biocompare.com/Bench-Tips/137449-How-to-Make-Sure-Your-CO2-Incubator-Is-Working-Properly/> (accessed Feb. 06, 2022).

Conclusions/action items: This was an informative article on how to maintain cleanliness within the incubator which will be very useful closer to the end of the project when we have a final working product, but it's still good to know as we build because then some of this can be included in the testing protocols in order to ensure a safe and clean product. We haven't done much work with CO2 so we're really going to have to look into that since a CO2 gas analyzer is significantly over our \$100 budget.



02/13/2022 Standard Tolerance Values

MAYA TANNA - Feb 13, 2022, 12:40 PM CST

Title: Standard Tolerance Values

Date: 02/13/2022

Content by: Maya

Present: Maya

Goals: To document CO2 tolerance values

Content:

Findings

- CO2 Tolerance Value
 - CO2 is typically kept between 3-7% depending on the application and culture
 - About a 2% tolerance value from 5%
 - Our sensor: MH z16 NDIR
- Temperature Tolerance Value
 - Temp is typically kept between 37-39 degrees C
- Humidity Tolerance Value
 - Typically kept between 85-95% - Thermo Fisher Scientific recommendation

Conclusion: This research was necessary so we could include these tolerance values in our technical reports to ensure we are following typical industry standards.

Cite: "Why is CO2 Safety Important for Incubators?," *AZoSensors.com*, Jan. 17, 2020. <https://www.azosensors.com/article.aspx?ArticleID=1872> (accessed Feb. 13, 2022).

B. C. Coops, "Incubation: Everything You Need To Know About Incubator Heat and Humidity," *Backyard Chicken Coops*. <https://www.backyardchickencoops.com.au/blogs/learning-centre/everything-you-need-to-know-about-heat-and-humidity> (accessed Feb. 13, 2022).



Smart Notes

Thermo Scientific CO₂ incubators optimize performance by design.

Q Which incubation parameters are most important for proper cell growth and expression?

A

All incubators are incubators. Proper incubation, gas control (O₂, CO₂, N₂) and humidity work together to create optimal growth. Simply having the gas concentrations in a culture environment are like you want to make an omelette.

The goal of making your cells in a CO₂ incubator at body temperature (37°C/98.6°F) is to duplicate, reproduce cells will grow best at that same temperature (37°C) gas control is essential to control the CO₂ because it's the blood flow. High humidity prevents evaporation of growth media. All these parameters work together to healthy cells which means more protein yields. Protein culture is especially important to produce primary and stem cells.

But how does your CO₂ incubator have conditions inside the incubator that it can deliver with the conditions in your lab. Once you close the door, the incubator wants to re-achieve the required state. So how long your cells spend at your specified conditions depends on how long and how often you open the incubator door, and even the design and engineering of the incubator door. Different technologies are employing like multi-gate different technology lines.

The Frontier Incubator™ Thermo™ Active-Air™ technology, combined with dual temperature zones, cooling edge (CE), sensor, and a unique covered, nitrogenously vacuum, to help cells provide recovery of all incubation after only 10 minutes after a 30 second door opening.



Thermo
SCIENTIFIC

[Download](#)

PF-CO2-SMARTNOTE-EN.pdf (574 kB)



02/06/2022 Self-Installing Incubator Monitoring System

MAYA TANNA - Feb 06, 2022, 10:31 AM CST

Title: Self-Installing Incubator Monitoring System

Date: 02/06/2022

Content by: Maya

Present: Maya

Goals: To document information on how to install CO2 sensors with a tutorial from TetraScience

Content:

Findings

- Prep
 - Make sure there is an available power outlet within 6 feet/get a power strip
 - Ensure access to the top of the freezer/refrigerator
- Each TetraScience link comes with:
 - Monitor (AnyLink)
 - Power supply
 - 2x antennas
 - USB sensor and probe



- Tutorial
 - Screw the wifi antenna onto the Link connect it to power
 - 4 indicator lights - power, run, net, warn



- CO2 (images of each step are included in the article)
 - Mount the sensor on the side wall of the incubator (use a 3M dual Lock hook-and-loop fastener)

- Place the sensor at least halfway to the back wall of the incubator
- Pass the cable through the sensor port to the back of the incubator
- Place a stopper on the port once cables have been fed through
- Connect the USB adapter into the temp sensor
- Insert the ends of the sensors' cables into the provided USB splitter
- Insert splitter into the USB port on the AnyLink monitor
- Place the link on top of the incubator with its antennae pointing up
- Key tip: remove sensors before sterilizing incubator with 70% ethanol

Cite: "Self-installing Incubator Monitoring," *TetraScience*. <https://tetrascience.zendesk.com/hc/en-us/articles/360029774512-Self-installing-Incubator-Monitoring> (accessed Feb. 06, 2022).

Conclusions/action items: This article is helpful because it includes steps to connecting a CO2 sensor to the incubator and then displaying the results on a monitor, but in terms of cost effectiveness, I don't think this would fit within our \$100 budget. Maybe we can follow similar steps but look for cheaper materials or come up with an entirely new approach. Once I go into ECB to look at the CO2 tank/sensor, I will have a better idea how we can try to connect all the pieces together.



02/12/2022 CO2 Progress from Previous Semesters

MAYA TANNA - Feb 27, 2022, 3:54 PM CST

Title: CO2 Progress from Previous Semesters

Date: 02/12/2022

Content by: Maya

Present: Maya

Goals: To document progress with CO2 sensors from previous semesters

Content:

Findings

- Fall 2020 / Spring 2021 Team
 - Worked on reading CO2 tank values on an Arduino, but never tested it
 - Used a solenoid valve to regulate distribution of CO2 in the incubator
- Spring 2017 Team
 - Got CO2 working!
 - Need to look more into this
- Maybe switch to plastic tubing because that's what the successful team used - just make sure to use really thick tubing
 - Do plastic tubing on the outside and copper tubing inside the box so heat can be dissipated inside the box and our temperature/humidity values can be more accurate

Conclusion: Since the spring 2017 team got CO2 working, I want to look more into what they did as well as use actual connectors with threading in the box in order to ensure heat is conserved as much as possible. In the future, I need to read the 2017 final report and look at the CO2 tank in person to determine possible connection ideas.

MAYA TANNA - Feb 12, 2022, 6:18 PM CST



[Download](#)

Spring_2021_Final_Poster.pdf (684 kB)



[Download](#)

Spring_2017_Final_Poster.pdf (1.72 MB)



11/07/2022 Anti-Fog Coating Mechanisms and Application

MAYA TANNA - Nov 07, 2022, 6:00 PM CST

Title: Anti-Fog Coating Mechanisms and Application

Date: 11/07/2022

Content by: Maya

Present: Maya

Goals: To document findings regarding anti-fog coating mechanisms and application

Content:

- Industrial anti-fog coatings are optical thin film coatings usually made from hydrophilic coatings that maximize surface energy
 - Ex) polymers and hydrogels and they prevent fogging at very low or high temps
 - Typically sustainable and environmentally friendly
- Anti-fog agents are either hydrophilic agents or surfactant-based
- Permanent anti-fog solutions consist of layering and covalently binding polymers to surfaces to achieve increase stability and durability of the system

Conclusions/action items: Use this information when trying to solve the anti fog/condensation issue.

Citation: S. Canet, "Anti-Fog Coating: The Mechanism and Applications," *Advanced Nanotechnologies S.L.*, May 09, 2019. <https://www.advancednanotechnologies.com/anti-fog-coating-the-mechanism-and-application/> (accessed Nov. 07, 2022).



11/07/2022 Incubator Sterilization Using H2O2

MAYA TANNA - Nov 07, 2022, 6:01 PM CST

Title: Incubator Sterilization Using H2O2

Date: 11/07/2022

Content by: Maya

Present: Maya

Goals: To document findings regarding incubator sterilization to make sure we are maintaining a clean environment for cells to thrive

Content:

See attachment below.

Conclusions/action items: This information on sterilization will be beneficial as we approach the final steps of this project in the spring.

MAYA TANNA - Nov 07, 2022, 6:01 PM CST



[Download](#)

ReachInH2O2WhitePaperRevA.pdf (479 kB)



09/11/2022 PrintrLab Incubator

MAYA TANNA - Sep 11, 2022, 10:33 AM CDT

Title: PrintrLab Incubator

Date: 09/11/2022

Content by: Maya

Present: Maya

Goals: To document findings from a recently published article about a new low-cost cell culture incubator in the field to better inform current project decisions

Content:

- Cost: less than \$400
- Open-source CO2 incubator
- Purpose: to regulate temperature and keep bacterial cultures healthy during incubation
- Components
 - Raspberry Pi computer connected to a 3D printer controller board that has controls for a CO2 sensor, solenoid valve, heater, and thermistors
 - CO2 is supplied via the sublimation of dry ice (readily available and flexible to accommodate different incubator volumes needed) stored inside a thermos to maintain a 5% CO2 supply
 - The entire system is controlled by G-Code commands sent by the Raspberry Pi to the controller board and the team built a software app to control and monitor the system remotely
 - Internal system - system has a leak-proof food storage container that holds a CO2 sensor, 3D-printer heater-bed heater, and a thermistor from a 3D printer to keep the internal environment at optimal levels
 - External system - electronics, solenoid valve, home-made pressure-relief valve, power, and a thermos for dry ice storage
 -
- Results
 - Can maintain consistent internal environment for 3+ days without manual interruption
 - Testing shows that results are comparable with more expensive/commercial incubators in the field



Fig 1. Schematic diagram and photos of the components of device. (A) General schematic diagram of the device and setup. (B) Photo of the setup using a small plastic food storage container. (C) Larger incubator setup using a thermos box that can be used with the same hardware. The latex balloon (orange) and a three way connector (green) with a flexible latex hose (yellow) to the CO₂ line acted as positive venting features. This requires a small positive pressure in the thermos to supply the CO₂, but without the risk of excessive pressure build up inside the thermos.



Fig 2. Dry ice storage containers for providing CO₂ to the incubator. The thermos that can store dry ice while providing CO₂ to the incubator. The capacity to store more dry ice in a larger thermos allows uninterrupted use for over four days.

Conclusions/action items: Potentially, we can use this device's CO2 mechanism for our incubator or at least take some inspiration/similar concepts from it when incorporating CO2 into our system.

Citation: A. Arumugam *et al.*, "PrintrLab incubator: A portable and low-cost CO2 incubator based on an open-source 3D printer architecture," *PLOS ONE*, vol. 16, no. 6, p. e0251812, Jun. 2021, doi: 10.1371/journal.pone.0251812.



09/18/2022 Anti Fog Options

MAYA TANNA - Sep 18, 2022, 7:51 PM CDT

Title: Anti Fog Options

Date: 09/18/2022

Content by: Maya

Present: Maya

Goals: To research anti fogging materials to prevent the issue that we had last semester with having a cloudy coating on the top glass and also look for practical purchasing options.

Content:

- Option 1: FogShield XP Pre-Moistened Towelette Station: 25 Wipe Count, Individually Wrapped, Pre-Moistened
 - Cost: \$10.28 (for 25 wipes)
 - <https://www.grainger.com/product/BAUSCH-LOMB-FogShield-XP-Pre-Moistened-1AHE8>
- Option 2: Lens Cleaning Solution: Anti-Fog/Anti-Static, Non-Silicone, 16 fl oz Bottle Size
 - Cost: \$6.32 (for 16 fl oz)
 - <https://www.grainger.com/product/BAUSCH-LOMB-Lens-Cleaning-Solution-Anti-5BB83>
- Option 3: Lens Cleaning Solution: Anti-Fog/Anti-Static, Silicone, 16 fl oz Bottle Size
 - Cost: \$6.58 (for 16 fl oz)
 - https://www.grainger.com/product/BAUSCH-LOMB-Lens-Cleaning-Solution-Anti-4T932?opr=APPD&analytics=altItems_5BB83

Conclusions/action items: All of these are very reasonably priced options. I think that Option 3 is the best, because it has silicone which is the active ingredient in anti-fogging. Grainger had very limited options, so these were the top contenders.



10/22/2022 ImageJ Quantification Methods

MAYA TANNA - Oct 22, 2022, 10:27 AM CDT

Title: ImageJ Quantification Methods

Date: 10/22/2022

Content by: Maya

Present: Maya

Goals: To document findings from research on ImageJ quantification methods

Content:

1. Option 1: Do Process >> Image Calculator (subtract the 2 images)
 1. Problem: another image is generated, do we need to see quantitative results or just compare differences in generated images?
2. Option 2: Do Plugins >> Classification >> Microscope Image Focus Quality
 1. Need to install "classification"
 2. Need to convert images to 16-bit integer data only
 3. Instructions: https://imagej.net/imagej-wiki-static/Microscope_Focus_Quality
3. Option 3: If you just want a number that describes how "different" the 2 images are, sum the square of the difference between pixel values for all pixels.
 1. Gives you a quantitative way to compare the differences between different image pairs.
 2. If you want to find places in the image where 1 and 2 are different, plot the absolute value of the difference between the 2 images.

Conclusions/action items: Use these results when conducting testing (specifically optical and anti fog) later on.



11/02/2022 ImageJ Intensity Quantification Methods

MAYA TANNA - Nov 02, 2022, 5:19 PM CDT

Title: ImageJ Intensity Quantification Methods

Date: 11/02/2022

Content by: Maya

Present: Maya

Goals: To document findings from research on ImageJ intensity quantification methods

Content:

See attached document.

Conclusions/action items: Use these tools if needed for optical and anti fog data analysis.

MAYA TANNA - Nov 02, 2022, 5:20 PM CDT



[Download](#)

Quantification.pdf (534 kB)



11/04/2022 Show and Tell Notes/Ideas

MAYA TANNA - Nov 07, 2022, 3:33 PM CST

Title: Show and Tell Notes/Ideas

Date: 11/4/2022

Content by: Maya

Present: Maya

Goals: To document optical testing results.

Content:

- Pitch: looking for ideas regarding image analysis and anti fog improvement
- Ideas
 - Use MATLAB - convert to RGB values, put a certain threshold on focused vs. not focused, write a code in MATLAB
 - Ask Alexander McGee
 - Check code from ECE 203 - there's MATLAB code provided
 - Try to regulate where the condensation is going (a drip point and a swirl)
 - May need to buy it and may be expensive
 - Change the slope of the glass so it could lean one way and condensation could follow a specific path
 - Do more research on image recognition
 - Apply a blur filter to the original image and see what matches
 - Put a squeegee (motor with a wiper) every 30 seconds
 - can you use MATLAB to analyze the images?
 - MATLAB can find all the areas that are out of focus
 - MATLAB as an app has premade programs that we don't even have to code and we can just run it.
 - Screenshot of the image and put it back into image J
 - There's an image processing class and we can reach out to the professor
 - He uses mathatic
 - Setharts
- Next steps: Bella will make the glass hydrophobic in her research lab

Conclusions/action items: Use this feedback from Show and Tell to work on completing data analysis.

Key ideas:

1. Use MATLAB or python libraries to analyze the images
2. Use a windshield wiper or rainX to get ride of condensation.



11/07/2022 Image Analysis in MATLAB

MAYA TANNA - Nov 07, 2022, 6:16 PM CST

Title: Image Analysis in MATLAB

Date: 11/07/2022

Content by: Maya

Present: Maya

Goals: To document findings regarding doing image analysis in MATLAB and experiment with this later in the week

Content:

- Reading image data into the workspace: <https://www.mathworks.com/help/images/read-image-data-into-the-workspace.html>
- Getting image data: <https://www.mathworks.com/help/images/ref/getimage.html>
- Image information tool: <https://www.mathworks.com/help/images/ref/imageinfo.html>
- In vs. out of focus: <https://www.mathworks.com/matlabcentral/answers/164384-difference-between-focus-and-out-of-focus-images>

Conclusions/action items: Try to troubleshoot data later using these resources.



11/11/2022 Tong Lecture Notes

MAYA TANNA - Nov 11, 2022, 12:03 PM CST

MAYA TANNA - Nov 11, 2022, 12:22 PM CST

Title: Tong Lecture Notes

Date: 11/11/2022

Content by: Maya

Present: Maya

Goals: To document notes from the Tong Lecture

Content:

- How to Evolve an Entrepreneurial Mindset for Students and Faculty
- Entrepreneurs are everywhere
- Entrepreneurship is generally found in B-schools
- Entrepreneurially interested engineering students can go to a university eship center or take additional courses in the B-school for a minor or certificate.
- Can we not develop both engineering and entrepreneurship interests side by side?
- Can we go farther to include co-curricular, translational research activities, events, and programs?
- Entrepreneurship is the backbone of the global economy
- Engineers play a critical role by addressing problems and creating solutions
- The same characteristics are required for entrepreneurial mindset
- Strongly context dependent

Conclusions/action items: Use these notes to inspire my future career.



12/1/2022 ImageJ Problem-Solving

MAYA TANNA - Dec 01, 2022, 10:20 PM CST

Title: ImageJ Problem-Solving

Date: 12/1/2022

Content by: Maya

Present: Maya

Goals: To document findings on ImageJ analysis

Content:

1. Take a screenshot of image after microscope image focus quality plugin and split channels and measure so that you get a number with arbitrary units associated with the amount of red, green, and blue within the image
 1. Can graph these values over time
2. Do microscope image focus quality plugin normally --> measuring step TBD

Conclusions/action items: Action items are stated as goals in the content above.



09/18/2022 Homogeneity Test Protocol

MAYA TANNA - Sep 18, 2022, 11:05 AM CDT

Title: Homogeneity Test Protocol

Date: 09/18/2022

Content by: Maya

Present: Maya

Goals: To document an additional test protocol that has been added to the collection in order to check homogeneity and a uniform distribution of each of the internal environment components of the system

Content:

See attached document.

Conclusions/action items: Review this protocol with the team and add it to the test protocol template document, as well as execute during incubator testing.

MAYA TANNA - Sep 18, 2022, 11:05 AM CDT

Homogeneity Test Protocol

Introduction
 Name of Tester:
 Color of Test/Measurement:
 Size of Test/Measurement:

Objectives
 The aim of this test is to ensure that the internal environment throughout the system is uniform and that performance is consistent and that it is within the limits. The goal is to verify that the conditions are uniform throughout the incubator (SPC, RH, CO₂, and O₂) levels.

Steps	Procedure	Verification/Inspection	Pass/Fail	Tester Initials
1	Observe the system with the camera and ensure that there are no leaks throughout the system.	<input type="checkbox"/> Verified Comments:		
2	Place the sensors in the incubator and record the values.	<input type="checkbox"/> Verified Comments:		
3	Calculate and adjust the system and ensure that all of the values are within the limits and are uniform.	<input type="checkbox"/> Verified Comments:		
4	Repeat steps 1-3 for the temperature component.	<input type="checkbox"/> Verified Comments:		
5	Repeat steps 1-3 for the CO ₂ component.	<input type="checkbox"/> Verified Comments:		

[Download](#)

Homogeneity_Test_Protocol.pdf (58.2 kB)



09/24/2022 Anti Fog Application Test Protocol

MAYA TANNA - Sep 24, 2022, 12:18 PM CDT

Title: Anti Fog Application Test Protocol

Date: 09/24/2022

Content by: Maya

Present: Maya

Goals: To document the creation of a newly written test protocol that will evaluate the time that the anti fog solution must be reapplied to the system to ensure clear visibility

Content:

See attached document.

Conclusions/action items: Use this protocol to determine the time period that the anti fog solution lasts, and when moving into characterization and verification/validation testing.

MAYA TANNA - Sep 24, 2022, 12:19 PM CDT

Anti Fog Application Test Protocol

Introduction:
 Name of Tester:
 Color of Test Equipment:
 Size of Test Equipment:

Explanation:
 The estimated time between the anti fog solution must be applied to the system under test to prevent a degradation in visibility through the glass. The goal is for the anti fog solution to keep the systems as clear as possible for an extended period of time, but this will be re-evaluated through this protocol.

Steps	Procedure	Verification/Inspection	Pass/Fail	Tester Initials
1	Apply 2 portions of the anti fogging solution onto a single location edge and top-down all glass surfaces within the system.	<input type="checkbox"/> Inspected Comments:		
2	Record the time and date that the solution is administered.	<input type="checkbox"/> Inspected Comments:		
3	Observe the system under test to ensure that there is no condensation or fog on the glass surfaces.	<input type="checkbox"/> Inspected Comments:		
4	Record the time and date that any fog starts to appear on the glass surfaces.	<input type="checkbox"/> Inspected Comments:		
5	Repeat steps 1-4 three times in order to create three data points. There are controlled variables. The average time for the amount of time that the anti fog solution functions for will maintain recommended as	<input type="checkbox"/> Inspected Comments:		

[Download](#)

Anti_Fog_Application_Test_Protocol.pdf (54.5 kB)



09/24/2022 Testing Protocols (Template) Updated 1

MAYA TANNA - Sep 24, 2022, 12:20 PM CDT

Title: Testing Protocols (Template) Updated 1

Date: 09/24/2022

Content by: Maya

Present: Maya

Goals: To document updated testing protocols that better reflect current project plans

Content:

See attached document.

Conclusions/action items: Use these protocols when moving into characterization and verification/validation testing.

MAYA TANNA - Sep 24, 2022, 12:20 PM CDT



[Download](#)

Testing_Protocols_Template_2_.pdf (102 kB)



09/20/2022 Testing Protocols (Template) Updated

MAYA TANNA - Sep 20, 2022, 4:17 PM CDT

Title: Testing Protocols (Template) Updated

Date: 09/20/2022

Content by: Maya

Present: Maya

Goals: To document updated testing protocols that better reflect current project plans

Content:

See attached document.

Conclusions/action items: Use these protocols when moving into characterization and verification/validation testing.

MAYA TANNA - Sep 20, 2022, 4:17 PM CDT



[Download](#)

Testing_Protocols_Template_1_.pdf (98.9 kB)



09/11/2022 Testing Protocols (Template)

MAYA TANNA - Sep 11, 2022, 10:45 AM CDT

Title: Testing Protocols (Template)

Date: 09/11/2022

Content by: Maya

Present: Maya

Goals: To document updated testing protocols that better reflect current project plans

Content:

See attached document.

Conclusions/action items: Use these protocols when moving into characterization and verification/validation testing.

MAYA TANNA - Sep 11, 2022, 10:46 AM CDT

Internal Environment - Temperature and Humidity Sensor Test Protocol

Introduction
 Name of Tester:
 Date of Test/Performance:
 Site of Test/Performance:

Objectives
 The format for employing a sensor inside the incubator is to measure the internal temperature. The measurement of the humidity and temperature will be obtained by an ADXL345 (I2C) based compatible sensor. The main goal is to make sure that the code and the ADC (I2C) are working correctly by calibrating the sensor and then confirming its accuracy of steady state and precision in dynamic steps using a thermistor. To validate the sensor the internal air and sensor values on the Arduino boards. Once the sensor is calibrated, its accuracy will be tested by measuring the temperature and humidity of the working environment. To gauge if they are reflecting as expected, and then measuring its temperature at varying humidity and temperature differences. The goal is to make the sensor able to handle the incubator with a thermistor and the sensor. To keep the incubator completely sealed, the thermistor probe and wiring cables were inserted into the incubator and held through the glass. The hole will be considered acceptable if the sensor value is within 2% of the thermistor temperature.

Step	Procedure	Verification/Validation	Pass/Fail	In Error of Tester
1	Calibrate the sensor using a known reference temperature.	<input type="checkbox"/> verified Comments:		
2	Test the accuracy of the sensor by comparing it with a known reference temperature. Read a set of data from the sensor for 10 minutes. Place the sensor in the top of the incubator and measure the temperature inside the incubator. Repeat this until you have 100 data points in the database and compare the temperature against the known reference temperature. If the sensor follows these trends, it is verified.	<input type="checkbox"/> verified Comments:		
3	Set up the incubator for testing with the sensor.	<input type="checkbox"/> verified Comments:		

[Download](#)

Testing_Protocols_Template_.pdf (95.7 kB)



10/03/2022 Anti Fog Test Results

MAYA TANNA - Oct 03, 2022, 7:08 PM CDT

Title: Anti Fog Test Results

Date: 10/03/2022

Content by: Maya

Present: Maya

Goals: To document test results from the anti fog application testing

Content:

See attached document.

Conclusions/action items: Use these results to wipe the glass and reapply anti fog solution after using the incubator for more than an hour.

Comments

Amit Nimunkar

Dec 10, 2022, 2:04 PM CST

Make conclusions based on the data collected. Did you anti-fog application pass the tests and could be used in your project?

MAYA TANNA - Oct 03, 2022, 7:09 PM CDT

Anti Fog Application Test Protocol

Introduction
 Name of Tester: Maya Tanna
 Date of Test Performance: 10/03/2022
 Site of Test Performance: ESB, 10th Spring Street

Expectation
 The approval test procedure for anti-fog application is applied to the system under test to determine whether and how to locate through the glass. The goal is to see anti fog application keep the system's visibility as clear as possible for an extended period of time. The test will be necessary to see through the process.

Step	Procedure	Verification/Validation	Pass/Fail	Tester's Notes
1	Apply 2 portions of the anti-fog solution under a spray (vertical wipe and repeat down all glass surfaces within the system)	<input checked="" type="checkbox"/> Passed Comments:	Pass	off
2	Repeat the wipe and note that the solution is still present	<input checked="" type="checkbox"/> Passed Comments: 10/3/2022	Pass	off
3	Check the system's visibility that there is no condensation fog on the glass surfaces after 1 hour	<input checked="" type="checkbox"/> Passed Comments:	Pass	off
4	Repeat the wipe and note that anti-fog still is visible on the glass surfaces	<input checked="" type="checkbox"/> Passed Comments: Note when I wipe the glass, the anti-fog solution must be applied to all surfaces and not just the glass.	Pass	off
5	Repeat steps 1-4 three times in order to ensure there is no fog on the surface	<input checked="" type="checkbox"/> Passed Comments: All 3 steps were successful and no fog on the glass.	Pass	off

[Download](#)

Anti_Fog_Testing.pdf (56.4 kB)

In response to comment:

Anti-fog testing did not pass the tests due to condensation, which potentially would have compromised microscope functionality while imaging - more tests were done as a result of this experiments and this experiment directly informed future work that Bella and I completed with the project



10/20/2022 Anti Fog Pilot Imaging

MAYA TANNA - Oct 21, 2022, 3:14 PM CDT

Title: Anti Fog Pilot Imaging

Date: 10/20/2022

Content by: Maya

Present: Maya

Goals: To document images taken from the inverted microscope to analyze the effectiveness of the anti fog solution

Content:

Control Group: cells without the incubator

Experimental: 20 min

Experimental: 10 min



Experimental: 30 min

Experimental: 40 min



- Results showed substantial fog around the 30 min timepoint but then went away at the 40 min timepoint (more timepoints need to be run)
- Control showed be cells in the incubator at 0 min timepoint for an accurate study
- May need to try increasing the number of coats of anti fog solution on the glass

Conclusions/action items: Run optical testing next week and redo this anti fog testing for 3 different trials and then take an average of the results.

MAYA TANNA - Oct 20, 2022, 4:26 PM CDT



[Download](#)

drive-download-20221020T212548Z-001.zip (75.7 MB)



10/25/2022 Optical Testing Results

MAYA TANNA - Nov 02, 2022, 5:57 PM CDT

Title: Optical Testing Results

Date: 10/25/2022

Content by: Maya

Present: Maya

Goals: To document optical testing results.

Content:

See attachment below.

Conclusions/action items: Use these results for future technical reports. Figure out a better way to quantify results (so far we have subtracted control from experimental images).

MAYA TANNA - Nov 02, 2022, 5:53 PM CDT

Optical Testing - Prior to and After Installation

Introduction
 Name of Tester: Maya Tanna
 Date of Test/Revision: 10/24/2022
 Site of Test Performance: ECR Lab, 9102


Objective
 The goal of this High Temperature Laser Polarization check is to determine which laser makes the optimal projection of self-jetted. Self-jetted has a gross percentage of 75%, a face percentage of 70, and a transparency percentage of 99.99 (1%). The test has a requirement that the appearance of the image of the jetted is 100% and the test is 100%. The test will determine through the use of imaging, which by the use of a high magnification microscope, the effect of self-jetted on the image of the jetted is 100%.

Step	Process	Verification/Validation	Pass/Fail	In Risk of Test
1	Prepare the microscope for use. Set the focus and the resolution to 100x magnification.	100x magnification Comments:	Pass	97.5%
2	Place the sample on the slide provided by the manufacturer. Place the slide on the microscope stage.	100x magnification Comments:	Pass	97.5%
3	Adjust the optical components of the microscope to best clarity. Based on previous alignment. Take advantage of what is observed under the microscope. Do a total of 100x of different locations to which is considered.	100x magnification Comments:	Pass	97.5%
4	Repeat steps 1-3 with the resolution and stage set to 100x magnification.	100x magnification Comments:	Pass	97.5%
5	Using the images, use of the clarity of the images using the microscope. Each quality check. The images will be of the jetted regions and assigned to the test on their location. Complete Pass images.	100x magnification Comments:	Pass	97.5%

[Download](#)

Optical_Testing.pdf (61.5 kB)

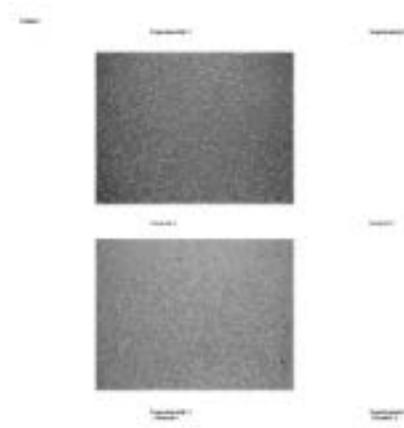
MAYA TANNA - Nov 02, 2022, 5:55 PM CDT



[Download](#)

Optical_Anti_Fog_Testing_Results.xlsx (5.29 MB)

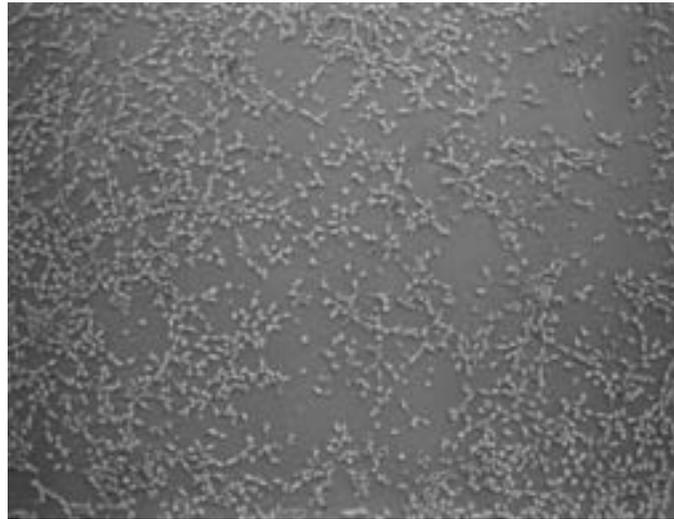
MAYA TANNA - Nov 02, 2022, 5:56 PM CDT



[Download](#)

optic_testing_prototype_1_16_bit.jpg (1.65 MB)

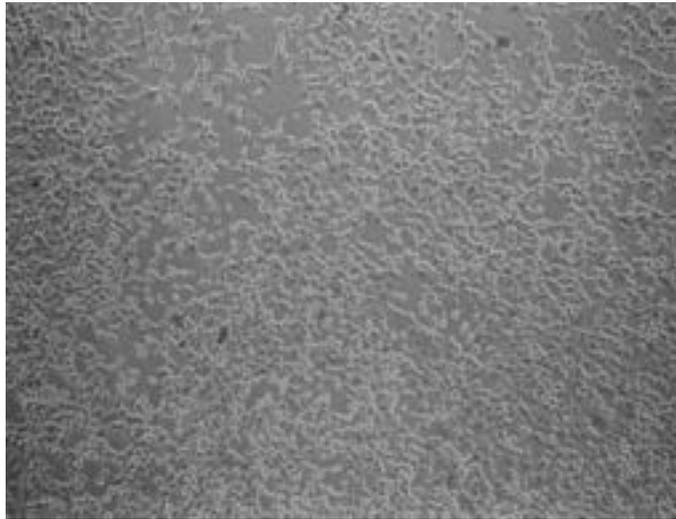
MAYA TANNA - Nov 02, 2022, 5:56 PM CDT



[Download](#)


optic_testing_prototype_2_16_bit.jpg (1.68 MB)

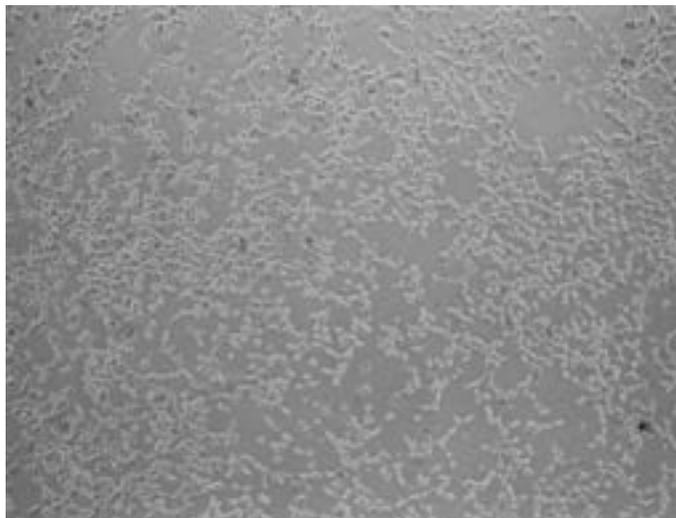MAYA TANNA - Nov 02, 2022, 5:56 PM CDT



[Download](#)

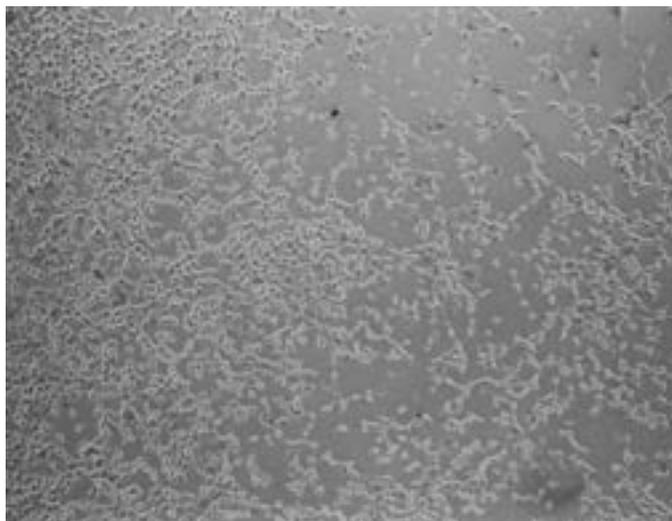optical_testing_control_1_16_bit.jpg (1.48 MB)



[Download](#)

optical_testing_control_2_16_bit.jpg (1.67 MB)



10/28/2022 Anti Fog Testing Trial 1

MAYA TANNA - Nov 07, 2022, 3:58 PM CST

Title: Anti Fog Testing Trial 1

Date: 10/28/2022

Content by: Maya

Present: Maya

Goals: To document anti fog testing results.

Content:

	Control 1	Control 2	0
min			
10 min			
20 min			
30 min			



40 min
min

50 min

60



Conclusions/action items: Use these results for future technical reports. Figure out a better way to quantify results.

Anti Fog Application Test Protocol

Introduction:

Name of Tester: Maya Tanna/De Design
 Date of Test/Revised: 10/28/2022
 Title of Test/Protocol: ECR Lash 1022

Objectives:

The goal of this test after the anti-fog solution is applied to the substrate is to prevent soot/dirt from easily being blown through the glass. The goal is for the anti-fog solution to keep the substrate as clear as possible for 1 hour but this will be evaluated and tested through the protocol.

Steps	Procedure	Verification/Inspection	Pass/Fail	Tester Initials
1	Apply 0.5 amount of the anti-fogging solution onto a single lens/mirror edge and apply down all glass surfaces within the system.	<input type="checkbox"/> Inspected Comments:	Pass	MT/2022
2	Place the lens and slide that the solution is administered.	<input type="checkbox"/> Inspected Comments: No soot/dirt was administered.	Pass	MT/2022
3	Check the system to be sure that there is no contamination or fog on the glass surfaces.	<input type="checkbox"/> Inspected Comments:	Pass	MT/2022
4	Place the lens and slide that anything starts to appear on the glass surfaces.	<input type="checkbox"/> Inspected Comments: Fog appeared after about 30 minutes of running the system.	Pass	MT/2022
5	Take approximately 10 minutes for 7 total iterations with 10 second intervals to evaluate the effect of water/condensation on the system over time.	<input type="checkbox"/> Inspected Comments:	Pass	MT/2022
6	Repeat steps 1-4 three times in order to compare three different iterations completed in one experiment to see how the administered anti-fog solution	<input type="checkbox"/> Inspected Comments:	Pass	MT/2022

[Download](#)

Anti_Fog_Application_Test_Protocol_Trial_1.pdf (58.5 kB)



11/01/2022 Anti Fog Testing Trial 2

MAYA TANNA - Nov 07, 2022, 5:31 PM CST

Title: Anti Fog Testing Trial 2

Date: 11/01/2022

Content by: Maya

Present: Maya

Goals: To document anti fog testing results.

Content:

Control 1

Control 2

0 min

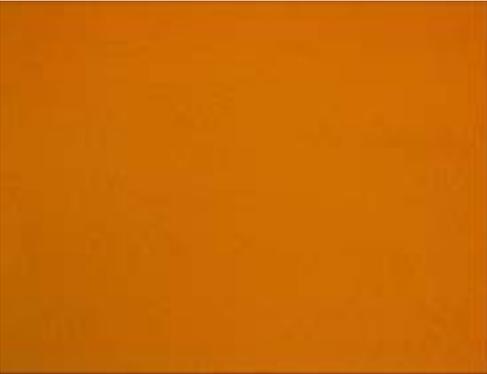
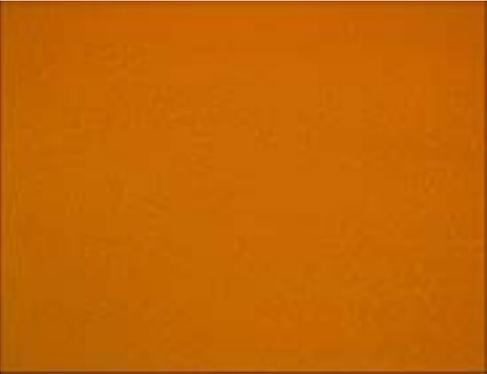


10 min

20 min

30 min





40 min

50 min

60 min



Conclusions/action items: Use these results for future technical reports. Figure out a better way to quantify results.

Anti Fog Application Test Protocol

Introduction:

Name of Tester: Maya Tanna/De/Design/Dev
 Date of Test/Measurement: 11/01/2022
 Site of Test/Measurement: ECR Lab 1022

Objectives:

The goal of this test is to verify whether the anti-fog coating is applied to the substrate under
 1) present conditions or not. It is done through the glass. The goal is for the anti fog
 coating to keep the systems as they are, unless possible for 1 year, but this will be evaluated
 and tested through the protocol.

Steps	Procedure	Verification/Inspection	Pass/Fail	Tester Initials
1	Apply a portion of the anti fogging solution onto a single location and use spray gun to apply evenly across the entire surface.	<input type="checkbox"/> Visual Comments:	Pass	MT/DB
2	Repeat the step and apply the solution to adjacent.	<input type="checkbox"/> Visual Comments: adjacent	Pass	MT/DB
3	Check the system to be sure that there is no condensation fog on the glass surface.	<input type="checkbox"/> Visual Comments:	Pass	MT/DB
4	Repeat the step and check that any fog starts to appear on the glass surface.	<input type="checkbox"/> Visual Comments: Fog appeared after about 10 minutes of testing the system.	Pass	MT/DB
5	Take approximately 10 minutes for 1 year (including water in and stages of time) to evaluate the effect of condensation on the system over time.	<input type="checkbox"/> Visual Comments:	Pass	MT/DB
6	Repeat steps 1-4 three times in order to ensure three cycles of tests are completed and compare to whether the condensed fogging solution started for the 1 year time.	<input type="checkbox"/> Visual Comments: The condensed fogging solution did not start for the full 1 year time period.	Pass	MT/DB

[Download](#)

Anti_Fog_Application_Test_Protocol_Trial_2.pdf (57.9 kB)



11/02/2022 Anti Fog Testing Trial 3

MAYA TANNA - Nov 07, 2022, 5:41 PM CST

Title: Anti Fog Testing Trial 3

Date: 11/02/2022

Content by: Maya

Present: Maya

Goals: To document anti fog testing results.

Content:

Control 1

Control 2

0 min



10 min

20 min

30 min



40 min

50 min

60 min



Conclusions/action items: Use these results for future technical reports. Figure out a better way to quantify results.

Anti Fog Application Test Protocol

Introduction

Name of Tester: Maya Tanna/DA for Rotorhead
 Name of Spec/Requirement: Functional
 Title of Test Methodology: EICB Lab 3032

Objectives

The goal of this test is to verify that the anti-fog coating is applied to the system in order to prevent ice-formation on the lens. The goal is for the anti-fog coating to keep the systems available on various weather for 1 year, but this will be evaluated and tested through the protocol.

Steps	Procedure	Verification/Inspection	Pass/Fail	Tester Initials
1	Apply 4 grams of the anti-fog coating solution to the lens. Remove excess liquid with a lint-free cloth.	<input type="checkbox"/> Visual Inspection	Pass	M/T/22
2	Repeat the step and apply the coating to the other lens.	<input type="checkbox"/> Visual Inspection 5 Figure	Pass	M/T/22
3	Check the system to be sure that there is no condensation fog on the glass surface.	<input type="checkbox"/> Visual Inspection	Pass	M/T/22
4	Repeat the step and check that any fog starts to appear on the glass surface.	<input type="checkbox"/> Visual Inspection Comments: Fog appeared after about 10 minutes of testing the system.	Pass	M/T/22
5	Take approximately 10 minutes for 1 year (including water in and change of time) to evaluate the effectiveness of the coating on the system over time.	<input type="checkbox"/> Visual Inspection	Pass	M/T/22
6	Repeat steps 1-4 three times in order to ensure three cycles of tests are completed and ensure consistency of the anti-fog coating application method for the 1 year test.	<input type="checkbox"/> Visual Inspection Comments: The anticipated maintenance interval for the lens 1 year test period.	Pass	M/T/22

[Download](#)

Anti_Fog_Application_Test_Protocol_Trial_3.pdf (57.9 kB)



09/11/2022 Biosafety and Chemical Safety Training

MAYA TANNA - Sep 11, 2022, 10:07 AM CDT

Title: Biosafety and Chemical Safety Training

Date: 09/11/2022

Content by: Maya Tanna

Present: Maya Tanna

Goals: To document biosafety and chemical safety training

Content:

See attachment below as proof of training

Conclusions/action items: Do more training and get a Green Pass Certification from the TEAM Lab.

MAYA TANNA - Sep 12, 2021, 11:29 PM CDT

University of Wisconsin-Madison
This certifies that MAYA TANNA has completed training for the following course(s):

Course Name	Completion or Date Taken	Completion Date	Expiration Date
Biosafety and Chemical Safety Training	09/11/2022	09/11/2022	09/11/2023

[Download](#)

biosafety_training.pdf (608 kB)

MAYA TANNA - Sep 12, 2021, 11:29 PM CDT

University of Wisconsin-Madison
This certifies that MAYA TANNA has completed training for the following course(s):

Course Name	Completion or Date Taken	Completion Date	Expiration Date
Biosafety and Chemical Safety Training	09/11/2022	09/11/2022	09/11/2023

[Download](#)

Chemical_Safety_Training.jpg (287 kB)



09/15/2022 Maya's Progress Report 1

MAYA TANNA - Sep 11, 2022, 10:43 AM CDT

Title: Maya's Progress Report 1

Date: 09/15/2022

Content by: Maya

Present: Maya

Goals: To document accomplishments of the past week and goals for the next week

Content:

Accomplishments

- Updated website with team picture and team roles
- Helped brainstorm questions for client meeting with Dr. Puccinelli
- Researched a recently designed incubator on the market and looked into their design for adding CO2 to the system
- Updated testing protocols to reflect current information
- Uploaded team progress report to the website

Goals

- Make any necessary edits to the PDS based on client feedback
- Update the website and help wherever else it is needed
- Start cell viability testing with Bella to determine their viability before being placed in our incubator (use an incubator available in a lab)

Conclusions/action items: Action items are stated as goals in the content above.

Comments

Amit Nimunkar

Dec 10, 2022, 2:05 PM CST

These progress reports are helpful.



09/22/2022 Maya's Progress Report 2

MAYA TANNA - Sep 21, 2022, 5:48 PM CDT

Title: Maya's Progress Report 2

Date: 09/22/2022

Content by: Maya

Present: Maya

Goals: To document accomplishments of the past week and goals for the next week

Content:

Accomplishments

- Created new homogeneity test protocol
- Attended client meeting with team and helped take meeting notes
- Researched anti-fogging options for the glass screens on Grainger
- Updated testing protocols to reflect current information
- Emailed Dr. Puccinelli to obtain cells
- Helped finalize the PDS based on client feedback
- Coordinated purchasing with Drew for the anti-fog solution
- Uploaded team progress report to the website

Goals

- Update the website and help wherever else it is needed
- Obtain cells from Dr. Puccinelli to start conducting testing
- Write a testing protocol to determine how often anti-fog spray should be applied to the glass
- Start helping team with design matrices
- Start cell viability testing with Bella to determine their viability before being placed in our incubator (use an incubator available in a lab)

Conclusions/action items: Action items are stated as goals in the content above.



09/29/2022 Maya's Progress Report 3

MAYA TANNA - Sep 27, 2022, 9:04 PM CDT

Title: Maya's Progress Report 3

Date: 09/29/2022

Content by: Maya

Present: Maya

Goals: To document accomplishments of the past week and goals for the next week

Content:

Accomplishments

- Created new anti fog application test protocol
- Updated testing protocols to reflect current information
- Finalized purchasing with Drew re: anti fog solution
- Helped team with design matrices
- Uploaded team progress report to the website

Goals

- Update the website and help wherever else it is needed
- Continue with live-cell testing as the control so we can test cells on our incubator when the time comes
- Start preliminary presentation

Conclusions/action items: Action items are stated as goals in the content above.



10/06/2022 Maya's Progress Report 4

MAYA TANNA - Oct 03, 2022, 5:35 PM CDT

Title: Maya's Progress Report 4

Date: 10/06/2022

Content by: Maya

Present: Maya

Goals: To document accomplishments of the past week and goals for the next week

Content:

Accomplishments

- Conducted anti fog testing
- Helped with preliminary presentation and report
- Uploaded team progress report to the website

Goals

- Update the website and help wherever else it is needed
- Continue with live-cell testing as the control so we can test cells on our incubator when the time comes
- Perform any other testing as needed

Conclusions/action items: Action items are stated as goals in the content above.



10/13/2022 Maya's Progress Report 5

MAYA TANNA - Oct 09, 2022, 2:36 PM CDT

Title: Maya's Progress Report 5

Date: 10/13/2022

Content by: Maya

Present: Maya

Goals: To document accomplishments of the past week and goals for the next week

Content:

Accomplishments

- Helped with preliminary presentation and report
- Uploaded team progress report to the website

Goals

- Update the website and help wherever else it is needed
- Continue with live-cell testing as the control so we can test cells on our incubator when the time comes
- Perform any other testing as needed

Conclusions/action items: Action items are stated as goals in the content above.



10/20/2022 Maya's Progress Report 6

MAYA TANNA - Oct 22, 2022, 9:44 AM CDT

Title: Maya's Progress Report 6

Date: 10/20/2022

Content by: Maya

Present: Maya

Goals: To document accomplishments of the past week and goals for the next week

Content:

Accomplishments

- Updated PDS and preliminary report to reflect cell viability requirements
- Completed peer evaluation reflection
- Brainstormed ideas for outreach activity
- Conducted anti fog testing on the system
- Uploaded team progress report to the website

Goals

- Finish data analysis from anti fog imaging testing
- Finalize outreach plan
- Complete other testing wherever possible
- Upload the website when necessary

Conclusions/action items: Action items are stated as goals in the content above.



10/27/2022 Maya's Progress Report 7

MAYA TANNA - Oct 22, 2022, 10:31 AM CDT

Title: Maya's Progress Report 7

Date: 10/22/2022

Content by: Maya

Present: Maya

Goals: To document accomplishments of the past week and goals for the next week

Content:

Accomplishments

- Finalized outreach plan with the team
- Conducted optical testing on the system
- Started anti fog testing on the system
- Uploaded team progress report to the website

Goals

- Finish data analysis from anti fog imaging testing
- Start making outreach arrangements
- Complete other testing wherever possible
- Upload the website when necessary

Conclusions/action items: Action items are stated as goals in the content above.



11/03/2022 Maya's Progress Report 8

MAYA TANNA - Nov 07, 2022, 5:42 PM CST

Title: Maya's Progress Report 8

Date: 11/03/2022

Content by: Maya

Present: Maya

Goals: To document accomplishments of the past week and goals for the next week

Content:

Accomplishments

- Prepared show and tell pitch
- Analyzed data from optical testing
- Conducted 3 trials of testing for anti fog to evaluate how much of the solution would maintain adequate focus quality
- Researched ImageJ intensity quantification methods
- Uploaded team progress report to the website

Goals

- Finish data analysis from anti fog imaging testing
- Start making outreach arrangements
- Complete other testing wherever possible
- Upload the website when necessary

Conclusions/action items: Action items are stated as goals in the content above.



11/10/2022 Maya's Progress Report 9

MAYA TANNA - Nov 09, 2022, 3:05 PM CST

Title: Maya's Progress Report 9

Date: 11/10/2022

Content by: Maya

Present: Maya

Goals: To document accomplishments of the past week and goals for the next week

Content:

Accomplishments

- Documented peer feedback and ideas from Show and Tell
- Researched anti fog coating mechanisms and application methods
- Researched incubator sterilization using hydrogen peroxide
- Researched image analysis in MATLAB and found some resources that may help with our anti fog images
- Uploaded team progress report to the website

Goals

- Finish data analysis from anti fog imaging testing
- Start making outreach arrangements
- Complete other testing wherever possible
- Update the website when necessary

Conclusions/action items: Action items are stated as goals in the content above.



11/17/2022 Maya's Progress Report 10

MAYA TANNA - Nov 16, 2022, 5:18 PM CST

Title: Maya's Progress Report 10

Date: 11/17/2022

Content by: Maya

Present: Maya

Goals: To document accomplishments of the past week and goals for the next week

Content:

Accomplishments

- Attended Tong Lecture and took notes
- Tried to troubleshoot MATLAB and anti fog data analysis - did not work
- Emailed Jeremy Rogers from BME 325 for help
- Uploaded team progress report to the website

Goals

- Continue troubleshooting data analysis from anti fog imaging testing
- Start making outreach arrangements
- Complete other testing wherever possible
- Update the website when necessary

Conclusions/action items: Action items are stated as goals in the content above.



11/24/2022 Maya's Progress Report 11

MAYA TANNA - Dec 01, 2022, 9:50 PM CST

Title: Maya's Progress Report 11

Date: 11/24/2022

Content by: Maya

Present: Maya

Goals: To document accomplishments of the past week and goals for the next week

Content:

Accomplishments

- Met with Dr. Nimunkar to troubleshoot anti-fog image analysis in MATLAB
- Tried a Laplacian filter and tested different code options as well
- Uploaded team progress report to website

Goals

- Figure out which functions work best on MATLAB
- Do testing wherever possible (maybe recovery or whole system testing)
- Start final deliverables

Conclusions/action items: Action items are stated as goals in the content above.



12/01/2022 Maya's Progress Report 12

MAYA TANNA - Dec 01, 2022, 9:52 PM CST

Title: Maya's Progress Report 11

Date: 12/1/2022

Content by: Maya

Present: Maya

Goals: To document accomplishments of the past week and goals for the next week

Content:

Accomplishments

- Continued troubleshooting anti-fog data analysis strategies on MATLAB
- Helped team with outreach project report
- Started focusing efforts towards final deliverables
- Uploaded necessary files to the website

Goals

- Set up a meeting with Dr. Nimunkar to review anti-fog data analysis strategies on MATLAB, and select the most effective and appropriate one
- Continue working on final deliverables
- Finalize outreach proposal
- Help team with live-cell testing

Conclusions/action items: Action items are stated as goals in the content above.



12/08/2022 Maya's Progress Report 13

MAYA TANNA - Dec 05, 2022, 10:16 PM CST

Title: Maya's Progress Report 13

Date: 12/8/2022

Content by: Maya

Present: Maya

Goals: To document accomplishments of the past week and goals for the next week

Content:

Accomplishments

- Met with Dr. Hai regarding anti-fog data analysis troubleshooting on ImageJ and resolved issues, will complete data analysis and compare with Bella's data from MATLAB
- Helped with final poster and final report
- Helped team with live-cell testing
- Uploaded necessary files to the website

Goals

- Finalize deliverables for the semester

Conclusions/action items: Action items are stated as goals in the content above.



12/15/2022 Maya's Progress Report 14

MAYA TANNA - Dec 09, 2022, 6:46 PM CST

Title: Maya's Progress Report 14

Date: 12/15/2022

Content by: Maya

Present: Maya

Goals: To document accomplishments of the past week and goals for the next week

Content:

Accomplishments

- Completed final deliverables
- Uploaded necessary files to the website

Goals

- Study for finals

Conclusions/action items: Action items are stated as goals in the content above.



Metal Thermal Properties Research - 2/8/22

Drew Hardwick - Feb 09, 2022, 2:25 PM CST

Title: Thermal Properties of Copper Wire

Date: 2/8/22

Content by: Drew Hardwick

Present: N/A

Goals: Learn more about how well Copper can hold/transfer heat

Content:

- The heat transfer characteristics of a solid material are measured by a property called the thermal conductivity, k (or λ), measured in $W/m\cdot K$. It is a measure of a substance's ability to transfer heat through a material by conduction. Note that Fourier's law applies for all matter, regardless of its state (solid, liquid, or gas), therefore, it is also defined for liquids and gases.
- Thermal conductivity of Copper is $401 W/(m\cdot K)$.
- Thermal conductivity of Silver is $419 W/(m\cdot K)$.
- Both Copper and Silver have high thermal conductivities (copper slightly less so) but copper is much cheaper than silver, which is why it is used in refrigerants.
- Copper seems like the best logical choice for our incubator, especially if we can use flexible copper wire and wrap it around within our well to try and evenly heat the water well as best as possible.
- Linear thermal expansion coefficient of Copper is $16.5 \mu m/(m\cdot K)$
- Thermal expansion is generally the tendency of matter to change its dimensions in response to a change in temperature. It is usually expressed as a fractional change in length or volume per unit temperature change.
- This expansion is something to look into, but since the units are $\mu m/(m\cdot K)$ I assume that the expansion due to heating will be negligible within the well. The only place we might have to worry about it is where the tubing enters the well. We do not want to make this opening too large and have leakage issues, but we also do not want to make it too small and have the tube expand slightly and potentially damage the copper tubing or acrylic well

References:

- "Copper - Thermal Properties - Melting Point - Thermal Conductivity - Expansion," *Material Properties*, Nov. 01, 2020. <https://material-properties.org/copper-thermal-properties-melting-point-thermal-conductivity-expansion/> (accessed Feb. 08, 2022).

Conclusions/action items:

- Look into expansion of copper wire, and what it will do at $37^{\circ}C$



CO2 Input Research - 2/20/22

Drew Hardwick - Mar 02, 2022, 8:28 AM CST

Title: CO2 Input Research

Date: 2/20/22

Content by: Drew Hardwick

Present: N/A

Goals: Research how difficult diluting CO2 is

Content:

- The team is deciding whether CO2 input would be best as 100% CO2 input controlled by a valve and allowed to diffuse throughout the well, or a previously diluted 5% input pumped in to fill the tank
- I personally think that pumping in the 5% CO2 could lead to issues, as we would have to completely fill the atmosphere within the well to accomplish the intended 5% CO2 atmosphere, and this could cause other issues by increasing the pressure to much
 - If we want to pursue the diluted idea, I think we should select a higher %, maybe roughly 15-25% so that we don't have to worry about pressure complications
 - Calculations needed to determine max pressure withstandable, and what % CO2 will be needed to keep the pressure below this threshold
- For the 100% input and diffusion, we will need to calculate the well area, and determine how long it will take the CO2 to diffuse
 - Gases like molecular oxygen and carbon dioxide have excellent permeability coefficients, and diffuse across a lipid bilayer membrane at a rate of **2-3 mm/sec**, approximately one hundred times as quickly as water.
 - Do math of area (with water in well) that gas will need to travel/diffuse over
- Tank Price must also be considered:
- Both Tanks can be rented instead of purchased to reduce total price
- Will renting a lesser percent cost more or be more difficult to procure?

References:

[]P. D. Wagner, "Vascular transit times in the lung," *Journal of Applied Physiology*, vol. 79, no. 2, pp. 380–381, Aug. 1995, doi: [10.1152/jappl.1995.79.2.380](https://doi.org/10.1152/jappl.1995.79.2.380).

[]N. C. Staub, J. M. Bishop, and R. E. Forster, "Importance of diffusion and chemical reaction rates in O₂ uptake in the lung," *Journal of Applied Physiology*, vol. 17, no. 1, pp. 21–27, Jan. 1962, doi: [10.1152/jappl.1962.17.1.21](https://doi.org/10.1152/jappl.1962.17.1.21).

Conclusions/action items:

- Look into developing diffusion and pressure equations, determine prices, and select easier idea



Reflection on Last Semester's Progress - 2/9/22

Drew Hardwick - Mar 02, 2022, 7:10 AM CST

Title: Reflection on Last Semester's Progress

Date: 2/9/22

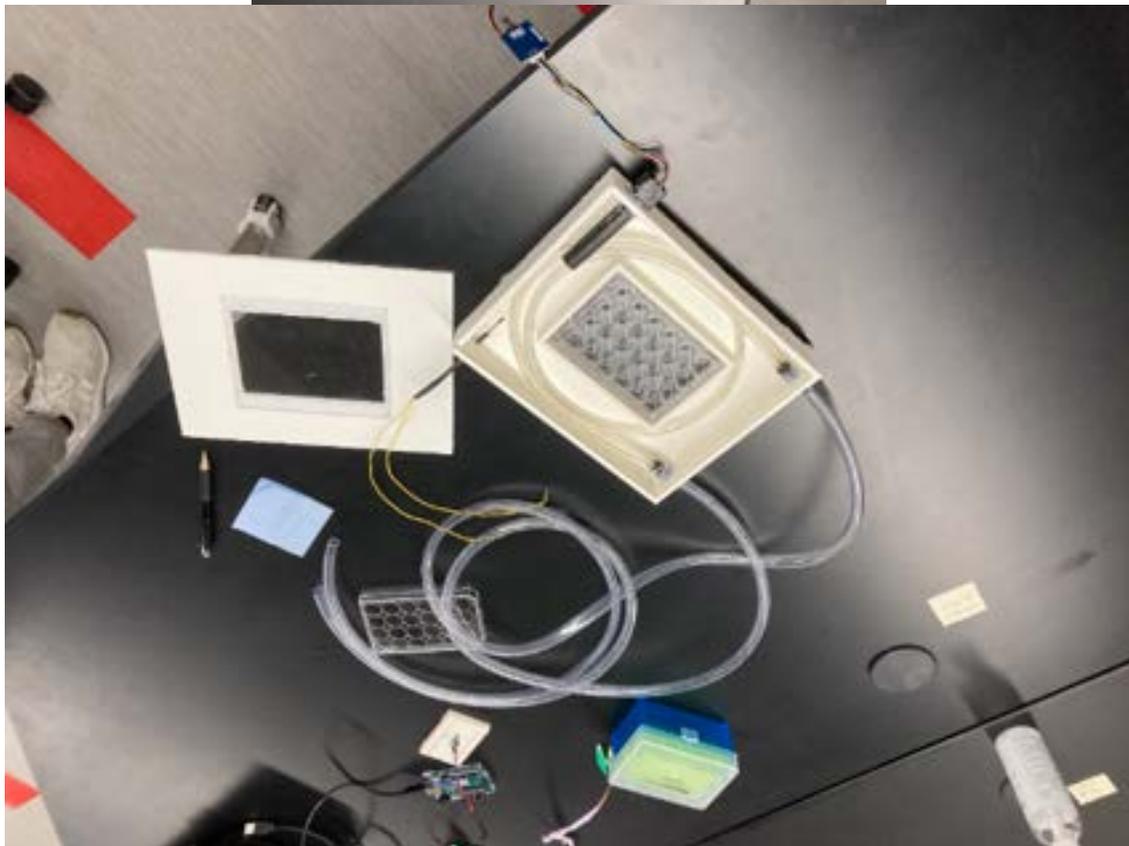
Content by: Drew Hardwick

Present: Sam Bardwell

Goals: See the teams previous work from last semester

Content:

SETUP:



Figures 1/2: Experimental Setup from Last Semester

REFLECTION:

- Sam showed me all parts of the experiment, including the extra pieces from previous teams they didn't use and the heated water pump
- He showed me how the current prototype functions and how the testing was conducted
- He also showed me the target microscope this product is intended for

- Overall I thought the team made significant progress last semester, and the design can definitely be improved upon this semester
- The material was clearly an issue - not air/watertight at all!!
- Reaching the target number of 37 degrees C, 5% CO2 and 95-100% humidity should be the primary goal of the semester
 - To reach this a CO2 input system must be developed - I will attempt to take this on as my primary contribution to the team
 - Insulation and heating must also be improved
- I have some worried about reusing parts from last semester
 - While it would be nice to reuse sensors like thermistor and CO2 sensor from the project last semester will we be able to remove them from the current project without damaging them??

Conclusions/action items:

- I now have firm understanding of last semester's and previous year's work, and should be ready to take on this challenge.



Metal Tubing Research - 2/5/22

Drew Hardwick - Feb 09, 2022, 2:25 PM CST

Title: Metal Tubing Research

Date: 2/5/22

Content by: Drew Hardwick

Present: N/A

Goals: Find Potential Metal Tubing and evaluate properties that make it a potential selection

Content:

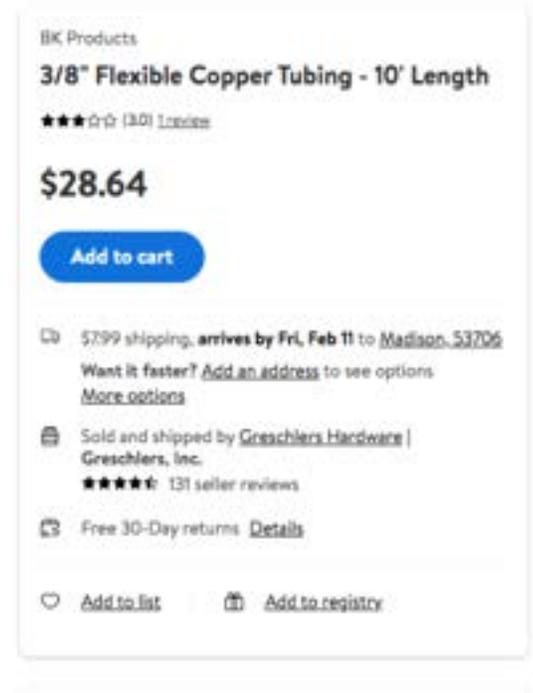


Figure (1): Flexible Copper Wire Available for Purchase at Walmart

This flexible copper wire is available in bulk for relatively cheap, for \$28.64, and it is 3/8" diameter, and 10' long

It is intended for use in HVAC or refrigeration, so it should do well maintaining and dealing with high temperatures.

1/4" diameter is also available for purchase.

The thermal properties of copper need to be further researched. Water's high specific heat means that the water will take a lot of constant heat to maintain its temperature at the desired value

The copper pipes will have to be as evenly distributed throughout the well as possible also to ensure that the water in the well is being as evenly heated as possible.

References:

[] "3/8" Flexible Copper Tubing - 10' Length," *Walmart.com*. <https://www.walmart.com/ip/3-8-Flexible-Copper-Tubing-10-Length/141597672> (accessed Feb. 05, 2022).

Conclusions/action items:

Continue research on possible materials, but this product is a possibility - better than other metal products I could find on internet.

Research potential issues with rusting in copper pipes. Will they be ok transporting water, would the copper have to be protected? would rust even occur?



Title: Acrylic Material Research

Date: 2/7/22

Content by: Drew Hardwick

Present: N/A

Goals: Learn more about Acrylic material

Content:

- Acrylic material was recommended for use by the client, Dr. Puccinelli.
- Both regular Acrylic and mirrored Acrylic are available for purchase in the UW makerspace:

Material Name	Category	Safe for Raster?	Safe for Vector Engraving?	Safe for Vector Cut?	Notes
100% Cotton	Fabrics	Yes	Yes	Yes	
100% Silk	Fabrics	Yes	Yes	Yes	
100% Wool	Fabrics	Yes	Yes	Yes	Wool felt is safe to cut but has a bad odor. Please bag all scraps and cut pieces immediately after cutting.
3form Chroma	No settings currently	Yes	Yes	Yes	
Acrylic	Plastics	Yes	Yes	Yes	For sale in Makerspace
Mirrored Acrylic	Plastics	Yes	Yes	Yes	Mirrored acrylic must be masked off with mirrored side face down

Table 1: Acrylics available at the UW-Madison Makerspace

- Mirrored acrylic is reflective like a glass mirror, but much lighter and stronger. There is no point in mirroring our incubator, so regular acrylic will be fine for our purposes

• General Laser Processing Tips for Acrylic

- 1) Never leave your machine unattended when working with acrylic. Many materials are susceptible to igniting, but acrylic - in all its different forms - has been shown to be especially flammable when cut with the laser. As a general rule, you should never run your laser - using any material - if you are not present.
- 2) Make sure to choose the right type of acrylic for your application. Remember, cast acrylic is better for engraving, while extruded acrylic is better suited for laser cutting.
- 3) Elevate the acrylic - using Epilog's Pin Table or other supports - to eliminate backside reflection.

• What types of acrylic projects can you make?

Acrylic is a durable and practical material for laser processing. The variety of colors and textures make this material ideal for all kinds of things:

- Point of purchase signage
- Directional signage
- Earrings/pendants/buttons
- **Containers/boxes**
- Cake/cupcake toppers
- Custom awards
- Holiday ornaments
- And much more!

References:

- "Acrylic Cutting and Engraving with a Laser Machine - Epilog Laser." <https://www.epiloglaser.com/how-it-works/applications/laser-cutting-acrylic/> (accessed Feb. 09, 2022).
- "Laser Cutter," *UW Makerspace*. <https://making.engr.wisc.edu/laser-cutters-2/> (accessed Feb. 09, 2022).

Conclusions/action items:

- Speak to Makerspace staff about laser print process/certification



CO2 Valve Research 2/25/22

Drew Hardwick - Mar 02, 2022, 8:21 AM CST

Title: CO2 Potential Valves

Date: 2/25/22

Content by: Drew Hardwick

Present: N/A

Goals: Look at CO2 system Valve options

Content:

Previous Semester's:



Figure 1: Previous Team's Valve

- This Valve from *US Solid* was in our locker as a part from a previous team's work
- I could not find this product on the *US Solid* website, so I believe it might not be in production anymore
 - Since I could not find it online, I am currently still unsure of what exactly its function/capabilities are
- Need to ask a makerspace staff member to analyze it

Potential Solenoid Valve Controlled Through Arduino:

- The Solenoid Valve described below is for the input of water, but could it be repurposed or modified with a different attachment/slightly different schematic for CO2?
- Parts:
 - DN15 Solenoid Valve or 12V Solenoid Valve
 - Arduino UNO
 - Solderless Breadboard
 - TIP120 Darlington Transistor
 - 1k Ohm Resistor
 - 1N4001 Diode

- Hookup wires (male/male)
- Schematic:

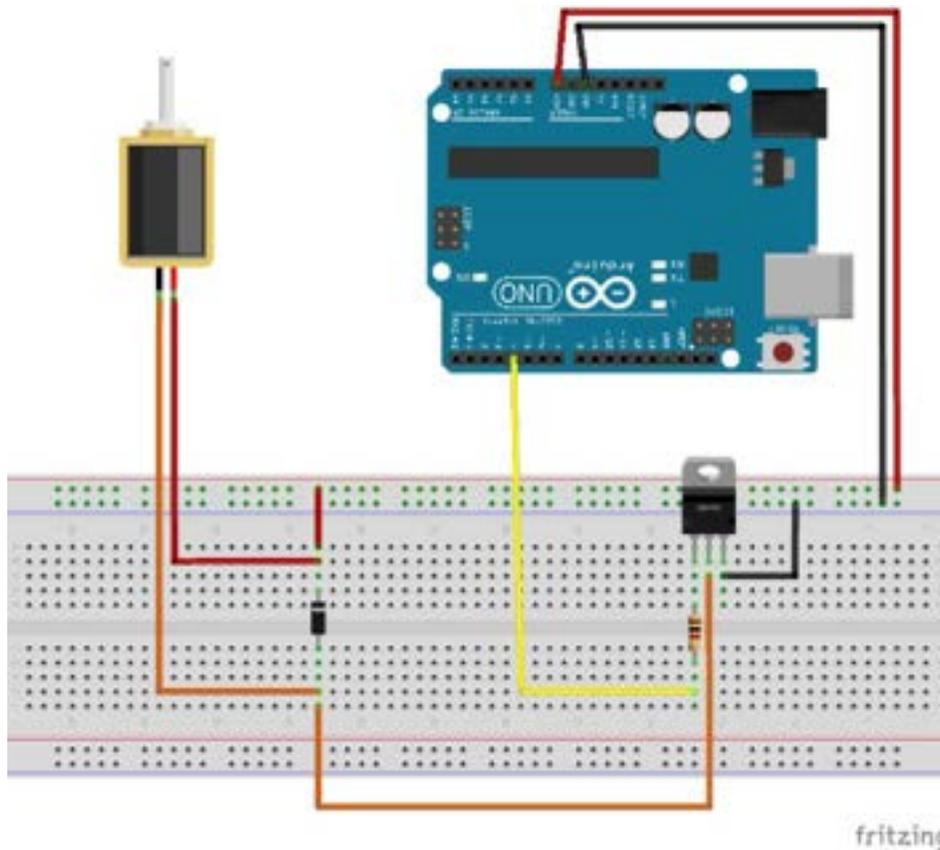


Figure 2: Solenoid Valve Schematic Diagram

- The solenoid works with anywhere between 6-12V which is too high to use with the standard Arduino 5V
- To get around this problem we will be using a 9V power supply – the solenoid will operate at 9V while the Arduino's built in voltage regulator will turn that 9V into the 5V that it needs to operate
- To gain access to the raw voltage going into the DC barrel jack on the Arduino Uno we will use the "Vin" pin located next to the ground pin on the Arduino.
 - Connect one of the jumper wires to the "Vin" pin on the Arduino and running it over to the positive rail on the side of the solderless breadboard
 - Next, run a wire from the Ground pin on the Arduino over to the negative rail on the solderless breadboard.
- Do not plug ANY other pins from the Arduino into the positive rail on the breadboard.
- Connections to solenoid do not matter, does not care +/-
- Snubber diodes help eliminate transient voltages caused when a magnetic coil (such as those found in a motor, relay, or solenoid) suddenly loses power. Without this diode in place the transient voltage spikes can damage other elements of the circuit.
- The snubber is placed from the negative side of the coil to the positive side. Since diodes only allow current to flow in one direction we need to make sure we get this right, otherwise it will be a dead short between power and ground.
- Ensure the side with the White stripe is connected to power/positive side of the solenoid

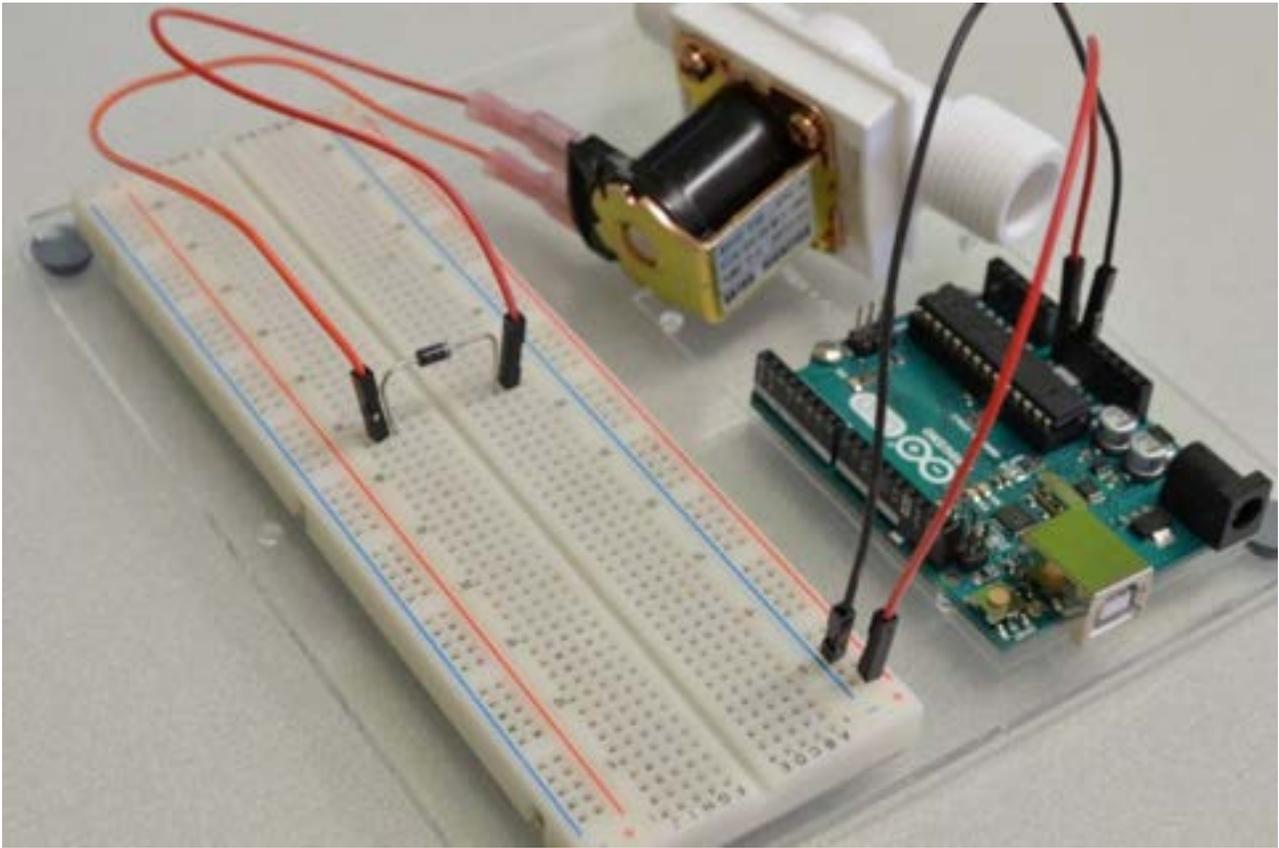


Figure 3: Setup thus far

- Place the transistor and the base resistor as shown in figure 4
- Connect the Arduino, connect the solenoid, and plug into ground - final setup shown below:

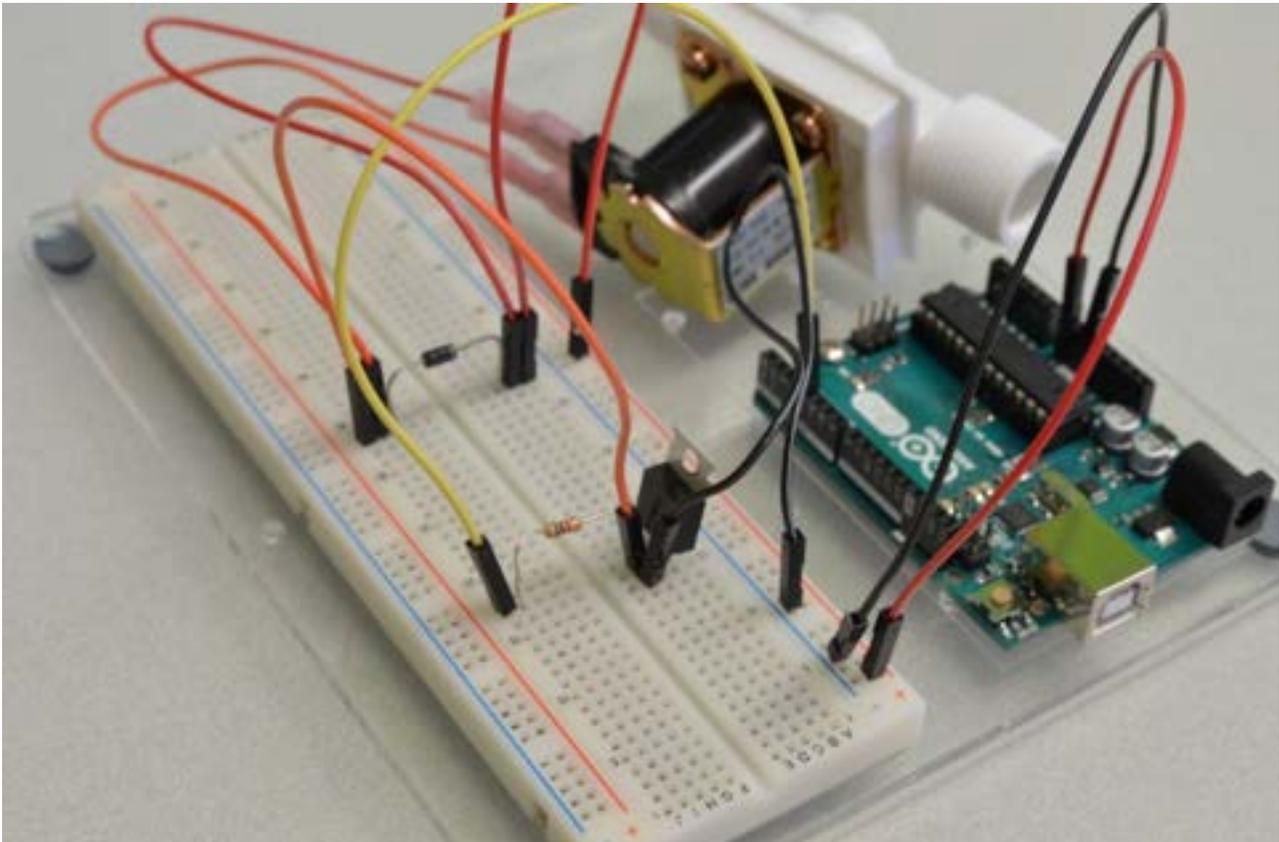


Figure 4: Final Solenoid Valve Arduino Setup

- Start writing/testing the code, which can be found at <https://bc-robotics.com/tutorials/controlling-a-solenoid-valve-with-arduino/>

Reflection:

- I am not an Arduino expert or a Robotics master, so I do not really know how feasible this design is, or how much work it would be to tweak it to fit our needs
- I thought it seemed like a doable setup, with mostly parts we have from our sparkplug electronics kits, and it seemed simple enough that it could be modified if need be
- Speak to the makerspace to get an expert's thoughts/opinions on how to tackle this issue

References:

- "Controlling A Solenoid Valve With Arduino," *BC Robotics*. <https://bc-robotics.com/tutorials/controlling-a-solenoid-valve-with-arduino/> (accessed Mar. 02, 2022).

Conclusions/action items:

- Speak to makerspace staff member about current valve
- Speak to makerspace about adjusting solenoid for CO2 input
- Talk to team about possible solenoid



Preliminary Purchasing Order 3/9/22

Drew Hardwick - May 03, 2022, 6:34 PM CDT

Title: Preliminary Purchasing Order

Date: 3/9/22

Content by: Drew Hardwick

Present: Everyone

Goals: Get preliminary purchasing order submitted and ordered before spring break

Content:

- The team wanted to get a jump start on fabrication and not be limited by not having the parts we require so we decided to order the parts before spring break so that they will (hopefully) be delivered during the break and that way the team can get fabricating when we return
- As BPAG I recorded and approved all purchasing requests, and created document to summarize and send to client (attached)
- Below is the Copper tubing (selected for its high thermal conductivity) that the team plans to run heated water through to heat up the water bath and internal environment:

2. [Copper tubing](#) (\$13.07)



FIGURE 1: Copper tubing purchased

- UPDATE: The team originally sought to purchase copper tubing, but this cost was eliminated as the client had extra copper tubing of the desired diameter handy
- Below are the transparent insulation sheets which will be used on the top and bottom of the incubator to allow the microscope optics and lighting to be used properly while also maintaining a 37°C temperature.

3. [Polycarbonate Transparent Thermal Insulation Sheets \(x4\)](#)



FIGURE 3: Glass Viewing Sheets

- UPDATE: According to the client, these sheets did come in the preliminary order, but the team never received them with the rest of the order, or were able to locate them, so the glass plates from last semester's prototype were used in the final prototype
 - These glass sheets were removed with a heat gun from the TEAM lab to melt the hot glue that had previously kept them in place
- Below is the Acrylic Contact Cement ordered to glue together the acrylic pieces of the final prototype

4. [Acrylic Contact Cement, Clear \(x2\)](#)



FIGURE 3: Acrylic Contact Cement ordered

- This acrylic cement was deemed necessary to purchase over ordinary glue due to its acrylic specific properties so that the prototype will be as sturdy and well built as possible
- Below is the Rubber lining purchased to keep the box lid stationary, and to prevent leakage between the lid and the well:

5. [Buna-N Square Cord: Std, Black, 0.133 in - 1/8 in, 5 ft Overall Lg, 70A, 0°F to 210°F](#)




FIGURE 4: Rubber Lining

- UPDATE: This lining was originally supposed to provide a seal and a soft surface for the lid to clamp down upon, but after initial acrylic fabrication, the client expressed his opinion that the lid did not need clamps to keep a tight seal with its weight and the rubber lining
 - This rubber was also repurposed and glued to the bottom of the box as "legs" so that the bottom glass would not scratch on the table it was resting on and would be elevated by these rubber "legs"

Conclusions/action items:

1. Getting these Items ordered the week prior to spring break will allow fabrication to begin after spring break
2. The acrylic will be printed at the Makerspace its cost added to the total along with any other prints and other future expenses

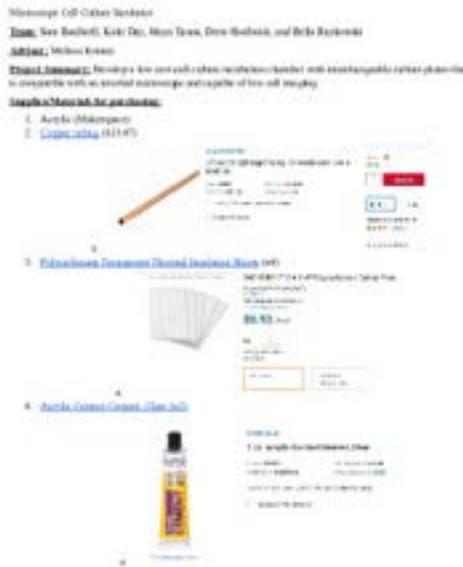Drew Hardwick - May 03, 2022, 6:34 PM CDT



[Download](#)

Materials_Purchasing_Request_-_Microscope_Cell_Culture_Incubator.pdf (610 kB)



Waterproofing Acrylic Research 4/4/22

Drew Hardwick - May 03, 2022, 8:15 PM CDT

Title: Waterproof Caulk Research

Date: 4/4/22

Content by: Drew Hardwick

Present: N/A

Goals: Determine which kind of Caulk to use to seal interior of box

Content:

- An issue the team has been tackling recently is how to properly seal the interior of the box where the water bath will rest
- Last semester, there was no lining because the box was 3D printed from PLA Plastic in one piece, but there was leakage due to suspected micropores in the PLA plastic
- This semester, acrylic is being used to minimize these micropores, and better insulate the internal environment, but because this material must be laser cut in 2D pieces and then glued together into a 3D object, there could be leakage at these connection points so the team wants to line the box interior with some sealant.
- Caulk was suggested by a classmate at the Show and Tell session and, having worked with caulk before I believe that this is the best material option
- I do also know there are multiple types of caulk so I want to research and see what type would be best for our situation

- Acrylic Latex Caulk
 - Also called painter's caulk, this is probably what most people think of when they think of caulk.
 - the cheapest type of caulk in most stores - meant to cover small holes and cracks and then be painted over
 - Adheres very well to wood, drywall, and masonry - meant for interior use only, and it usually cannot create a water-tight seal.
 - Most common/cheap caulk, but NOT USABLE for our design because of waterproofing aspect

- Acrylic Tile Sealant
 - This caulk comes in tiny tubes and is meant for patching holes and gaps between tiles in areas that are prone to mold and mildew
 - It is essentially a way to keep the tile well-sealed in between applications of a more durable sealant, and it should not be used as a primary sealant.
 - NOT VIABLE, we need a primary sealant

- Siliconized Acrylic Sealant
 - Siliconized acrylic combines the easy application of acrylic with the added durability of silicon
 - It is slightly more difficult to clean up than pure acrylic, but it is more durable and it provides a water-tight seal
 - It is even suitable for outdoor use, although it is not necessarily the best choice for outdoor applications
 - This could be a potential option for us

- Pure Silicone
 - This is one of the **most durable and water-tight** caulks that is made
 - It is ideal for bathrooms, especially sinks and toilets, because it adheres very well to **non-porous surfaces**
 - Once applied, it will **last for decades**, too.
 - This is the IDEAL caulk for our use

- TEAM lab does have silicone caulk for rental along with a caulk gun, so I believe that this should be the route taken by the team at this point
- I watched a youtube video (below) on how to use a caulk gun and properly seal with caulk so that I am prepared to rent the caulk/caulk gun from the TEAM lab and waterproof the interior of the box ASAP, as the caulk takes a long time (over 24 hours) to fully dry, so we want to get it applied ASAP so we can begin testing.
- <https://www.youtube.com/watch?v=FnZmYW-P8wU&t=21s>

References:

- [1 "Types Of Caulk For Buildings," *Waterproof Caulking & Restoration*, Dec. 16, 2019. <https://waterproofcaulking.com/types-of-caulk-to-use-on-commercial-buildings/> (accessed April 04, 2022).
- [2 Ace Hardware, *How To Use a Caulk Gun - Ace Hardware*, (Dec. 24, 2012). Accessed: April 04, 2022. [Online Video]. Available: <https://www.youtube.com/watch?v=FnZmYW-P8wU>

**Final Purchasing List 5/3/21**

Drew Hardwick - May 03, 2022, 7:37 PM CDT

Title: Final Purchasing List**Date:** 5/3/21**Content by:** Drew Hardwick**Present:** N/A**Goals:** As BPAG, Review Final Purchasing List**Content:****Final Materials and Expenses:**

m	Description	Manufacturer	Part Number	Date	QTY	Cost Each	Total	Link
Component 1								
Polycarbonate Thermal Insulation Sheets	2"x4.25" clear Polycarbonate safety plate for covering cells while viewing	Airgas	RAD64005012	3/9/22	4	\$0.53	\$2.12	Link
Component 2								
Acrylic Contact Cement	1 oz Clear Contact Cement to mount clasps and assemble acrylic box	Grainger	3EHR7	3/9/22	2	\$2.73	\$5.46	Link
Component 3								
Buna-N Square Rubber Cord	5ft, 1/8" x 1/8", 70A, 0°C - 210°C square rubber cord to prevent leakage with clasp lid	Grainger	784U15	3/9/22	1	\$4.86	\$4.86	Link
Component 4								
Hard Wood	36x24x 1/8 Hard wood that was used to fabricate the prototype	UW Makerspace	1	3/21/2022	1	\$2.50	\$2.50	Link
Component 5								
Hard Wood	18x24x 1/8 Hard wood that was used to fabricate the prototype	UW Makerspace	1	3/21/2022	1	\$1.25	\$1.25	Link
Component 6								
Barbed Adapter	Barbed x MNPT Adapter, Polyethylene, 3/8 in barb size, natural used to connect copper tubing to heated water tank	Grainger	1	3/29/2022	10	\$1.26	\$12.63	Link
Component 7								
Black Acrylic	Black Acrylic used to fabricate the incubation chamber 18x24 sheet with 1/2 inch thickness	UW Makerspace	1	4/11/2022	1	\$21.50	\$21.50	Link
Component 8								
3D print DC motor attachment	PVA plastic used to fabricate the DC motor attachment for the regulation of CO ₂ input into the incubation chamber	UW Makerspace	1	4/11/2022	1	\$2.72	\$2.72	Link
Component 9								
DC Motor	Actual motor used for CO ₂ regulation	UW Makerspace	1	4/11/2022	1	\$2.00	\$2.00	Link
TOTAL:	\$53.54							

- The First 3 items remain unchanged from their purchase in the preliminary order
- The Wood was purchased as a proof of design expense to confirm that our CAD laser cutting images would fit together nicely. The Wood Prototype is shown below:

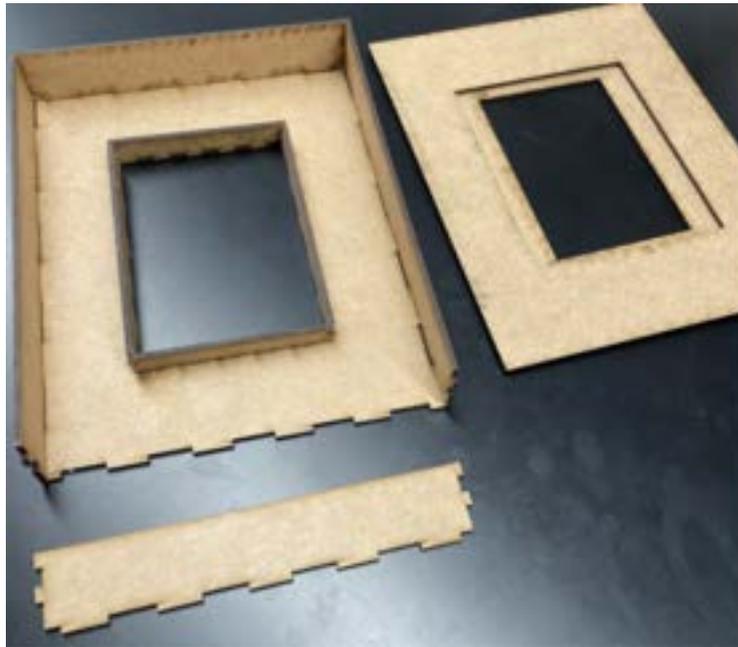


FIGURE 1: Wood Prototype

- The barbed adaptor was purchased to connect the plastic heated water pump tubing to the copper tubing on the interior of the incubator with no leakage, but this barbed attachment was abandoned due to poor fit, and a hose adaptor provided by the client was used instead. The purchased barbed adaptor is shown below

ELSON JAMES
Barbed x MNPT Adapter, Polyethylene, 3/8 in Barb Size, Natural
 Item # 1ZJX1 Mfr. Model # AB-4HDPE
 UNSPSC # 40142613 Catalog Page # N/A

Country of Origin: USA. Country of Origin is subject to change.

Precision-molded plastic barbed adapters are designed to help provide outstanding leak prevention. The anti-rotation devices help prevent tube stress and wear. Polyethylene adapters are highly chemical resistant and ideal for chemical plant, food plant, and water applications.

Compare this product

Web Price: **\$12.63** / pkg. of 10
 Qty: **Add to Cart**

Ship Pickup
 Expected to arrive Thu, May 05
 Ship to 53701 | [Change](#)

Shipping Weight 0.11 lbs
[Ship Availability Terms](#)

Add to List

FIGURE 2: Barbed Adaptor Purchased

- Below are the Hose Adaptors provided by the client (on the final prototype):



FIGURE 3: Hose-like Adaptors provided by client

- Both the Black Acrylic and PLA plastic for the actual incubator exterior and the CO2 motor attachment respectively were purchased from the Makerspace on the client's purchasing account and the prototypes are shown below:

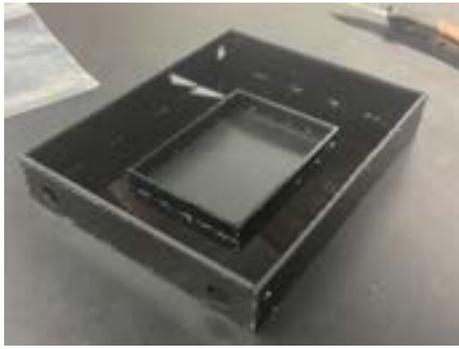


FIGURE 4: Final Acrylic Laser Cut Incubator Housing



FIGURE 5: Final 3D Printed PLA Plastic Valve holder:

- The DC motor was also purchased from the Makerspace window on the client's purchasing account and is shown below



FIGURE 6: Makerspace bought DC motor

- TOTAL BUDGET: \$53.54
- This is well under our budget and gives the team some money to spend to improve the product in future semesters (\$46.46)
- This total price tag is not taking into account the items given to us from the client (like the copper piping and the hose adaptors), and from last semester (like the sensors)
 - We estimate the total, all in price after purchasing these to be around \$150



Laser Cutting Research - 2/10/22

Drew Hardwick - Feb 10, 2022, 11:50 AM CST

Title: Laser Cutting Research

Date: 2/10/22

Content by: Drew Hardwick

Present: N/A

Goals: Learn More about Laser Cutting

Content:

- Laser cutting is mainly a thermal process in which a focused laser beam is used to melt material in a localised area. A co-axial gas jet is used to eject the molten material and create a kerf. A continuous cut is produced by moving the laser beam or workpiece under CNC control.
- A laser cutter is a prototyping and manufacturing tool used primarily by engineers, designers, and artists to cut and etch into flat material. Laser cutters use a thin, focused laser beam to pierce and cut through materials to cut out patterns and geometries specified by designers.
 - Apart from cutting, laser cutters can also raster or etch designs onto work pieces by heating up the surface of the workpiece, thus burning off the top layer of the material to change its appearance where the raster operation was performed.
- The laser originates from a laser resonator, which sends out a beam of intense light through reflects through a system of mirrors to the cutting head.
- Within the cutting head, the laser is focused through a lens and narrowed down to an extremely thin, concentrated beam. This beam is projected down at the material and can cut or raster the raw stock, which I'll cover in more detail later.
 - The cutting head is usually mounted on what is called an XY gantry, which is a mechanical system driven usually by belt or chain that allows for the precise movement of cutting head within a given rectangular area, which is the size of the work bed.
- The gantry allows the laser head to move back and forth and forward and back over the work piece so that it can make precise cuts anywhere on the bed. In order for the laser to actually cut, the focal point of the lens, where the laser would be at its finest, needs to be on the surface of the material it is cutting through.
 - All laser cutters require a focusing procedure before making their cuts to ensure that the laser cuts well.
- During a cutting operation, the cutting head fires a continuous laser at the material to slice through it. In order to know where to cut, the laser cutter driver reads all of the vector paths in the designed piece. Once you send your file to a laser cutter, only lines that register as only hairline or vector graphics with the smallest possible line thickness will be cut by the laser.
- Rastering is a lot different than vector cutting; instead of cutting all the way through the workpiece, the laser will burn off the top layer of the material you are cutting to create two color (and sometimes grayscale) images using the raster effect.
 - In order to raster materials, the laser will usually be set to a lower power than it would when vector cutting material, and instead of shooting down a pulsing beam, it creates fine dots at a selected DPI (dots per inch) so that the laser doesn't really cut all the way through.
- laser cutters have defined material ranges and limitations.
 - While some of this is due to the power it takes to cut through certain materials, some of the material limitations come from the gases that certain materials make when burned or cut with a laser.
 - Other materials can be cut, but respond poorly to heat and may shrivel or melt.
 - Like any other machining technology, there are definitely things that you can and can't do on a laser cutter.

MAKERSPACE SPECS:

Make	Model	Qty	Features	Permit Required		
Universal	ILS9150D-150	1	150W (2x75W) lasers. 36" x 24" x 12" bed	Lab Orientation + Laser Cutter 1 Upgrade	Manufacturer's Manual	Specs

Click [here](#) for a complete list of equipment.

- Laser Processing Area = 36" x 24"
- Maximum material cut depth = .5"

Software

You will need a 2D vector file, which can have the following file types: .dxf, .ai, .pdf

These files can be generated from multiple software packages including:

- 3D (CAD): Solidworks, [Onshape](#), Fusion 360
- 2D: Illustrator, [Gravit](#), Inkscape

The Makerspace has a computer available for file prep – just look for the file prep station near the laser cutter. CAE login not required.

Figure (1): Laser Cutter Specifications from UW Makerspace Website

References:

- [] "Laser Cutter," *UW Makerspace*. <https://making.engr.wisc.edu/laser-cutters-2/> (accessed Feb. 09, 2022).
- [] printeraction, "Laser Cutting Basics," *Instructables*. <https://www.instructables.com/Laser-Cutting-Basics/> (accessed Feb. 10, 2022).
- [] "Laser Cutting - Cutting Processes." <https://www.twi-global.com/technical-knowledge/job-knowledge/cutting-processes-laser-cutting-052.aspx> (accessed Feb. 10, 2022).

Conclusions/action items:

- Look into getting Laser 1 Upgrade

Motor Purchasing and Circuitry Meeting - 3/23/22

Drew Hardwick - May 03, 2022, 8:02 PM CD

Title: Motor Purchasing and Circuitry Meeting

Date: 3/23/22

Content by: Drew

Present: Drew and Katie

Goals: Meet with Dr. Amit Nimunkar to discuss the CO2 circuitry, and see about motor purchasing at UW Makerspace

Content:

- Katie and I spoke with Dr. Nimunkar after his Instrumentation class, and he confirmed that our arduino DC motor circuit schematic diagram should work properly
- Then Katie and I spoke with the UW Makerspace checkout window and confirmed that they do sell DC motors
 - However, the DC motors that they sell are very small and cheap (\$2.00)
 - There is concern that a motor this size will not supply enough torque to properly open and close the CO2 valve
 - Also limited by 5v output of arduino uno
- Other, more powerful DC motors I researched on Grainger are extremely expensive:
- The smallest Stepper Motor (internal gearbox, only can turn when power is supplied to it) on Grainger is still upwards of \$2



AUTONICS Stepper Motor: NEMA 23 / 56mm Frame, 1.54nm / 218.03 oz-in Max. Holding Torque, Two Phase

Item 5PFF3
Mfr. Model A16K-G268
[View Product Details](#)

Web Price [?]
\$270.23

⚠ Expected to arrive by end of Jul, 2022.

Ship to 53701 ✓

Qty: 1 **Add to Cart**

FIGURE 1: Stepper Motor for Purchase on Grainger

- This is very far out of our budget, and while we could find much cheaper, larger DC motors out there, we had trouble finding any reasonably priced motors on any approved purchasing site
- Because of this, we decided that for budgeting purposes, it was best to purchase the small DC motor from the Makerspace and see if it could work first, and then if not, reevaluate and take a new course of action
- Below is the motor we purchased:



FIGURE 2: DC motor (\$2.00) from UW Makerspace

Conclusions/action items:

- Motor is purchased, begin fabricating motor attachment and circuit



Copper Bending Research 3/25/22

Drew Hardwick - May 03, 2022, 8:13 PM CDT

Title: Metal work research

Date: 3/25/22

Content by: Drew

Present: N/A

Goals: Determine best way to bend Copper tube

Content:

- The current copper pipe that our client gave us is 1/2" diameter and about 4ft long
- It needs to be bent to a right angle at 2 places to fit inside our water bath
- Need to research how can this be done:

• Tips For Bending Copper Pipe

- Pipe Support: Supporting the copper pipe along the entire length of its bend is key to a consistent shape - support can either be inside/outside the pipe.
- Bend Slowly: Bending the copper pipe quickly might crimp it, even if properly supported - ripples may develop on the inside of the curve - always bend slowly.

• Use a Spring to Bend the Pipe

- Tube-bending springs fit in the copper pipe and act as support to better distribute the force
- Bends as extreme as 180 degrees are possible with tube springs
- Tube springs come in kits of various sizes that fit copper pipes ranging from 1/4-inch to 5/8-inch diameter.

• Use Sand or Salt to Bend the Pipe

- Dense materials packed inside the copper pipe produce an effect much like pipe bending springs
- This prevent any single area from receiving all of the bending force - the force is distributed along the entire length of the curve
- Not helpful for our purposes

• Use Ice to Bend the Pipe

- Like sand and salt, water is another dense material that can be used to fill a copper pipe for bending
 - water is denser in its fluid state than as ice, freezing the water helps to better contain it in the copper pipe
- Once again, not particularly useful for our purposes

• Use a Pipe Bending Tool to Bend the Pipe

- A pipe bender is a small, inexpensive, dedicated tool that bends various sizes of copper and other soft metal pipes to a set radius
- Shaped like a set of pliers, a pipe bender allows for the insertion of pipes down the middle. A marked gauge indicates the angle of the bend, from 0 up to 90 degrees

- The secret of pipe benders is that the top part of the tool—the shoe—travels along with the bend, ensuring a smooth curve.
- The TEAM lab website indicates they have Pipe benders available for free use (with a paid materials fee)
 - This is definitely the easiest and most precise way to bend our metal pipe, and we should pursue this plan of action first

References:

[1 "How to Bend Copper Pipe 4 Ways," *The Spruce*. <https://www.thespruce.com/how-to-bend-copper-pipe-5081971> (accessed March 25, 2022).
]

[2 "Tool Checkout," *TEAM Lab*. <https://teamlab.engr.wisc.edu/services/tool-checkout> (accessed March 25, 2022).
]



Copper Bending Session - 3/28/21

Drew Hardwick - May 03, 2022, 8:30 PM CDT

Title: Copper Bending in TEAM Lab

Date: 3/28/22

Content by: Drew

Present: Drew and Sam

Goals: Fabricate the Copper piping interior

Content:

- We began by checking out the pipe benders at the TEAM lab
 - Sam had his materials fee paid for this semester, so the rental cost nothing towards our project budget
- Our first attempt went poorly, as we initially chose the wrong size pipe bender
 - We thought that the copper pipe was 1/2" diameter, but upon bending our copper pipe we found that it did not fit properly in the 1/2" pipe benders and the pipe was pinched
 - This caused our first attempt to fracture the pipe
 - We remeasured with digital calipers and found that the INNER diameter was the assumed 1/2", but the OUTER diameter was 5/8"
 - We swapped out for the correct OUTER diameter pipe bender and tried again
- The second try went much better and we were able to bend the pipe to the desired 90 degrees
- HOWEVER: the rounding of the pipe was too long
 - we calculated that when doubled with another 90 degree bend on the other side, the width of the copper pipe would be too wide and it would not fit with in the incubator water well
- Sam and I were able to find copper L joints in the lab for no additional cost, and we decided to cut the copper pipe and solder it to the copper L joints instead of bending it
- The Final result is shown below



FIGURE 1: Cut copper pipe and L joints inside cardboard prototype to showcase fit (Yet to be soldered together)

Conclusions/action items:

- Solder the Copper piping parts together to prevent leakage



SOLIDWORKS CO2 Valve Holder Design 4/6/22

Drew Hardwick - May 03, 2022, 9:32 PM CDT

Title: CO2 Valve Attachment Initial SOLIDWORKS Design

Date: 4/6/22

Content by: Drew

Present: N/A

Goals: Get a preliminary 3D model prepared for the Valve Attachment

Content:

- My idea for this design was to modify a part I had printed for my design course last semester:
 - I designed and drafted a "tuning-fork"-esque part in SOLIDWORKS last semester
 - This design was also meant to attach to a DC motor via a long shaft and rotate to wrap a nylon seatbelt around the end
- My initial SOLIDWORKS template (from last semester) is shown below:

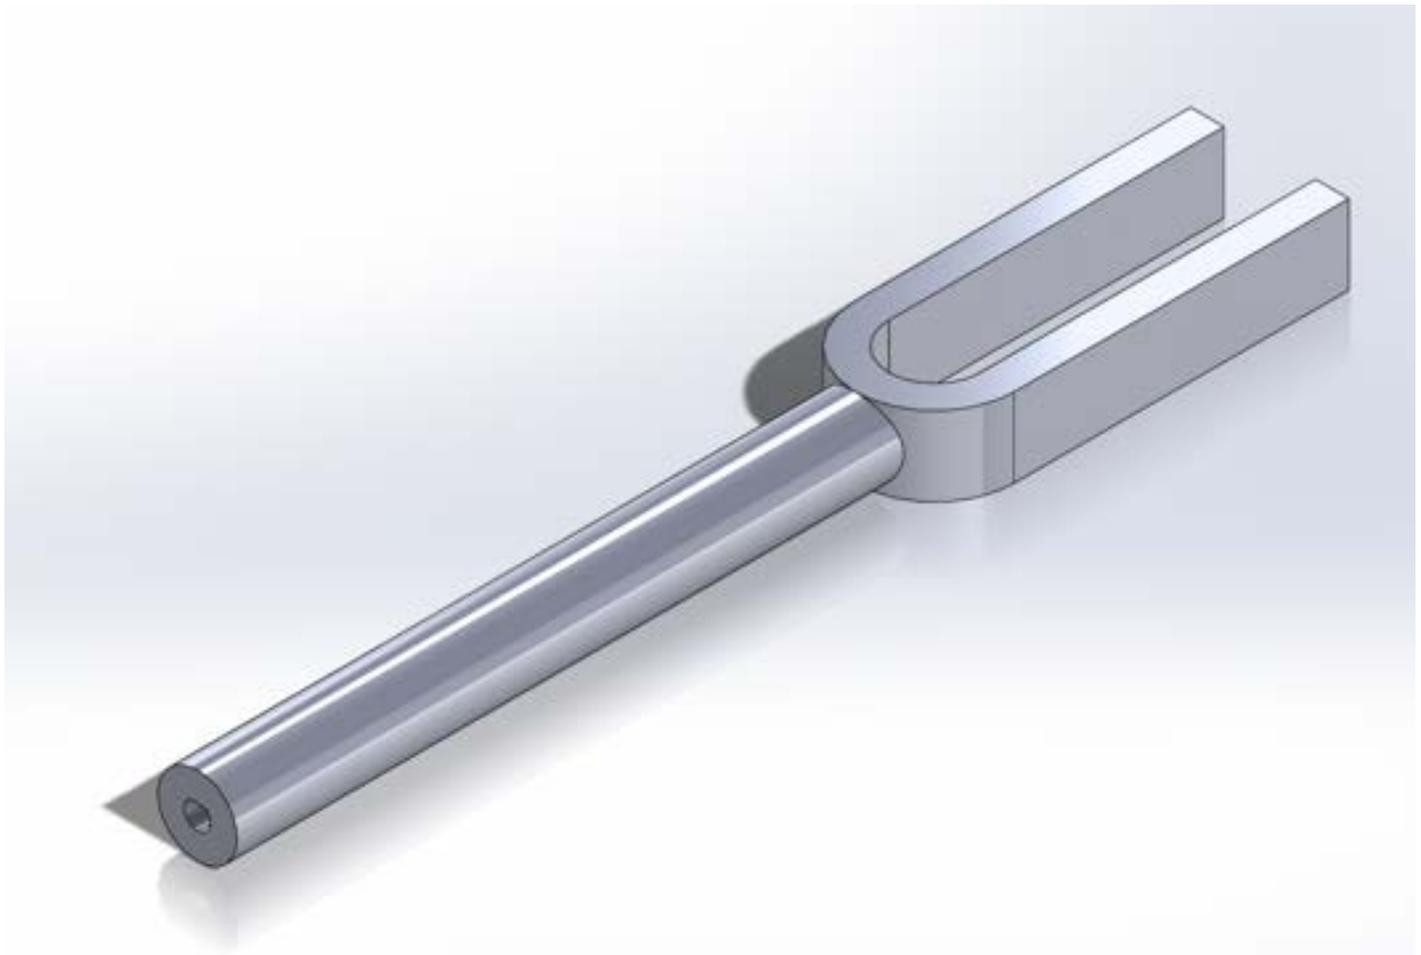


FIGURE 1: Tuning fork from BME 300 on SOLIDWORKS

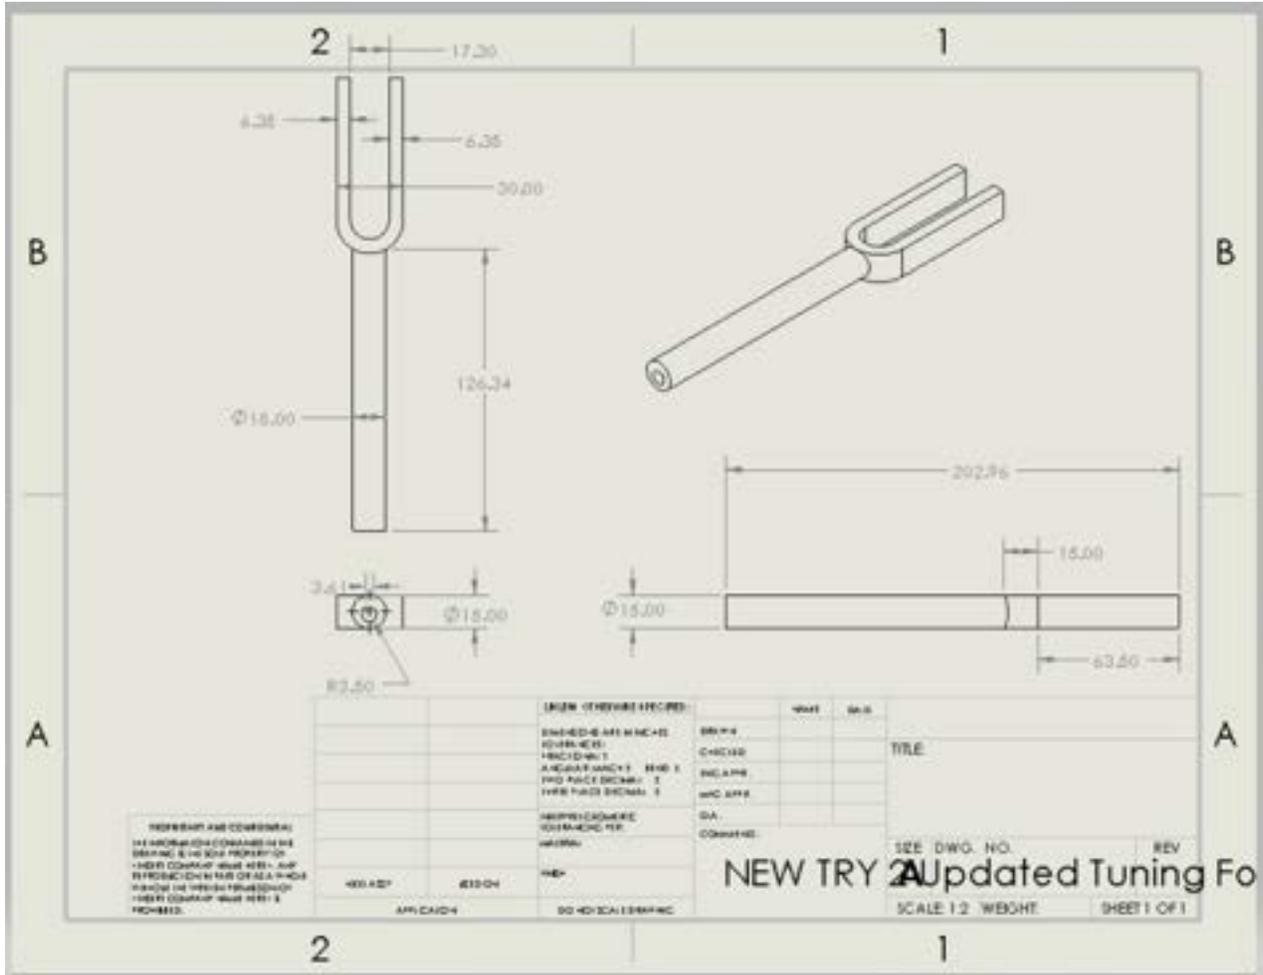


FIGURE 2: Tuning Fork Drawing

- Then I was able to edit this template to add 2 more arms, get rid of the hole for the motor in the base (with our small motor it will be easier to just drill the right diameter hole ourselves)
- The arms had to be spaced at the proper diameter of the valve (32.64mm)

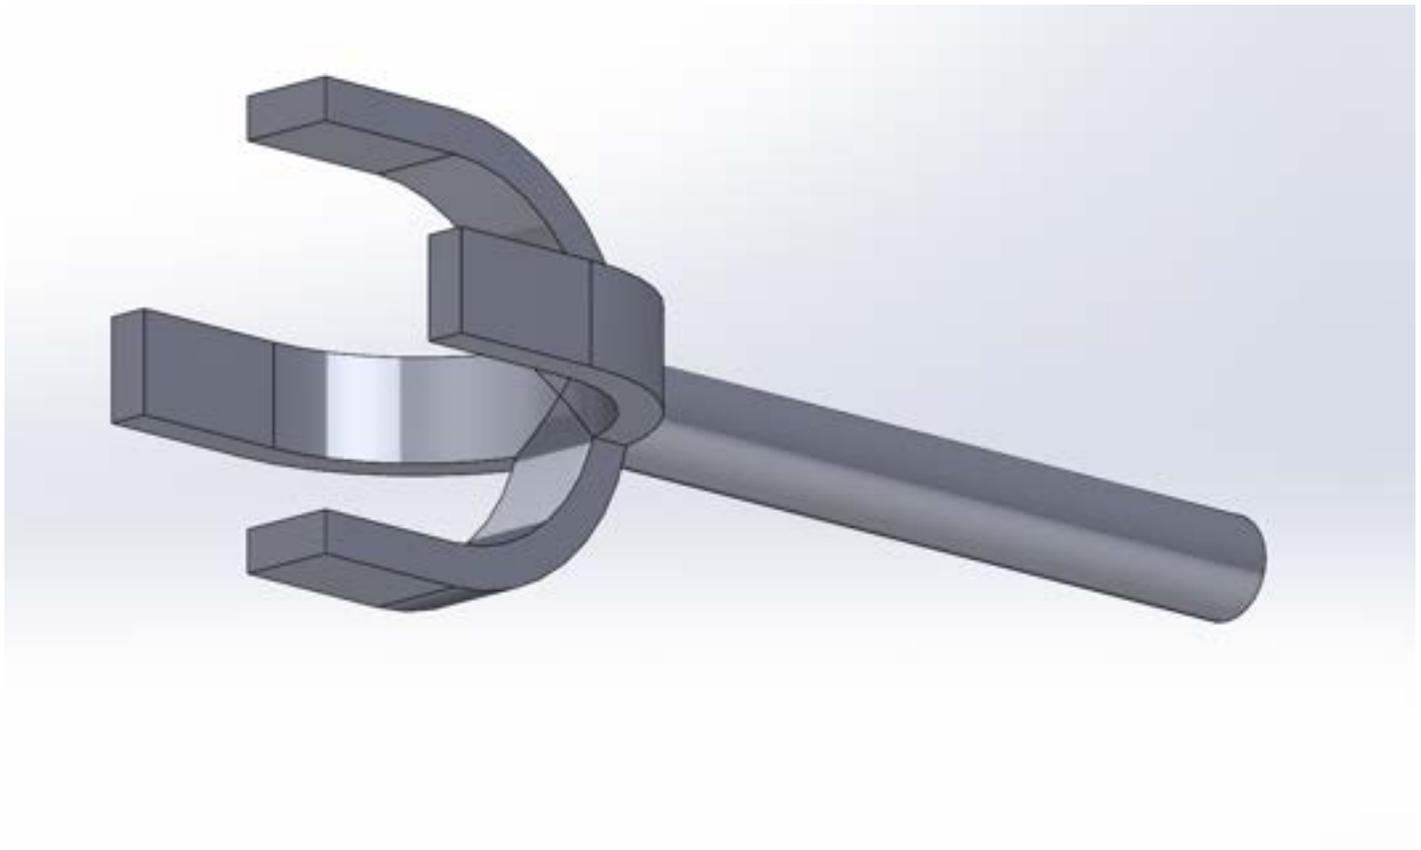


FIGURE 3: Initial Valve Connector SOLIDWORKS Design

Conclusions/action items:

- Begin Printing this piece for testing



SOLIDWORKS CO2 Valve Holder Editing Session 4/8/22

Drew Hardwick - May 03, 2022, 10:09 PM CDT

Title: SOLIDWORKS CO2 Valve Holder Editing Session

Date: 4/8/22

Content by: Drew

Present: N/A

Goals: Edit current SOLIDWORKS Draft

Content:

- As I thought more and more about the application of the valve, and how it would be used on a constant basis, I came to the realization that it needed to be beefed up
- The arms are far too thin in my original design and they are susceptible to stress fractures due to the constant torque and shear stress placed upon them
- The fix to this is to make them much thicker
- I also decided to make the base thicker to just beef up the entire design and prevent any possible fractures.
- The New SOLIDWORKS file (with dimensions in mm) is shown below:

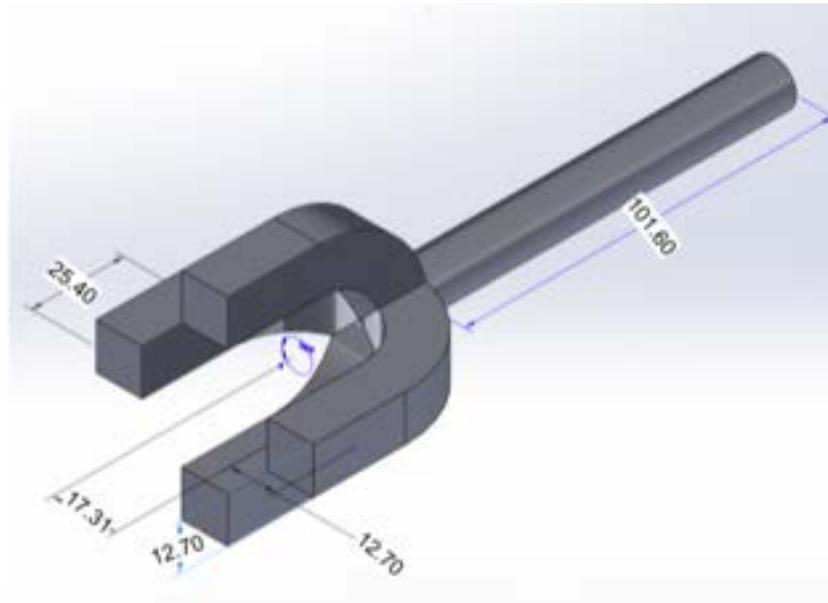


FIGURE 1: SOLIDWORKS image of edited Valve holder with dimensions in mm

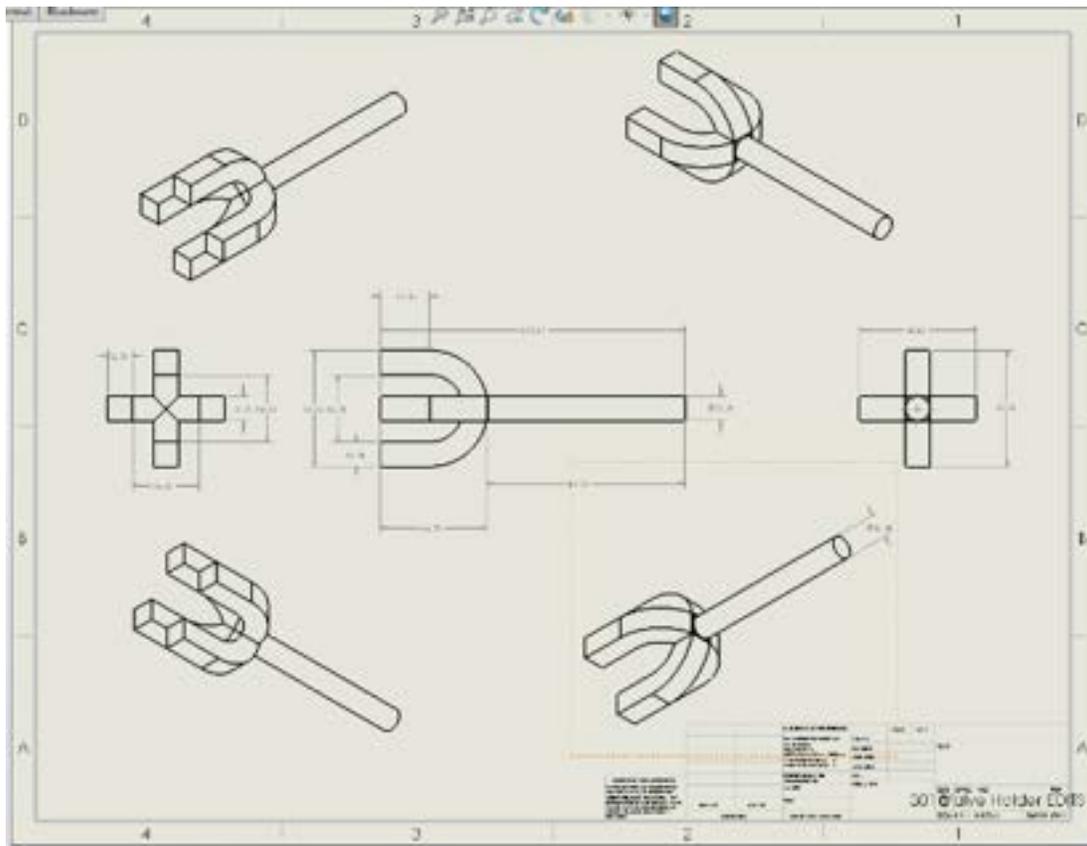


FIGURE 2: Edited Part Drawing with dimensions (in mm)

- This change caused a few kinks that took me a while to fix on solidworks
 - when the arm cross sectional area increased, it decreased the distance between them, so that the valve diameter would not be able to fit within the grasp of the holder
 - Because of this I basically had to redesign the piece from scratch

Conclusions/action items:

- Piece should be ready for printing
- 3D print ASAP



CO2 Valve Holder Printing 4/12/22

Drew Hardwick - May 03, 2022, 10:36 PM CDT

Title: CO2 Attachment Printing

Date: 4/12/22

Content by: Drew

Present: N/A

Goals: Print the Attachment Piece

Content:

- The 3D printing process at the UW Makerspace was relatively straightforward and occurred with no complications
- I chose to print in PLA Plastic due to its relative strength, cheapness and accessibility
- I chose to print in Black PLA Plastic to match the black acrylic of the box
- The print took roughly 4 hours, cost \$2.72, and was super easy to clean up after it was completed
- Below is an image of the final print, and the print job receipt



FIGURE 1: Final 3D printed Valve Attachment

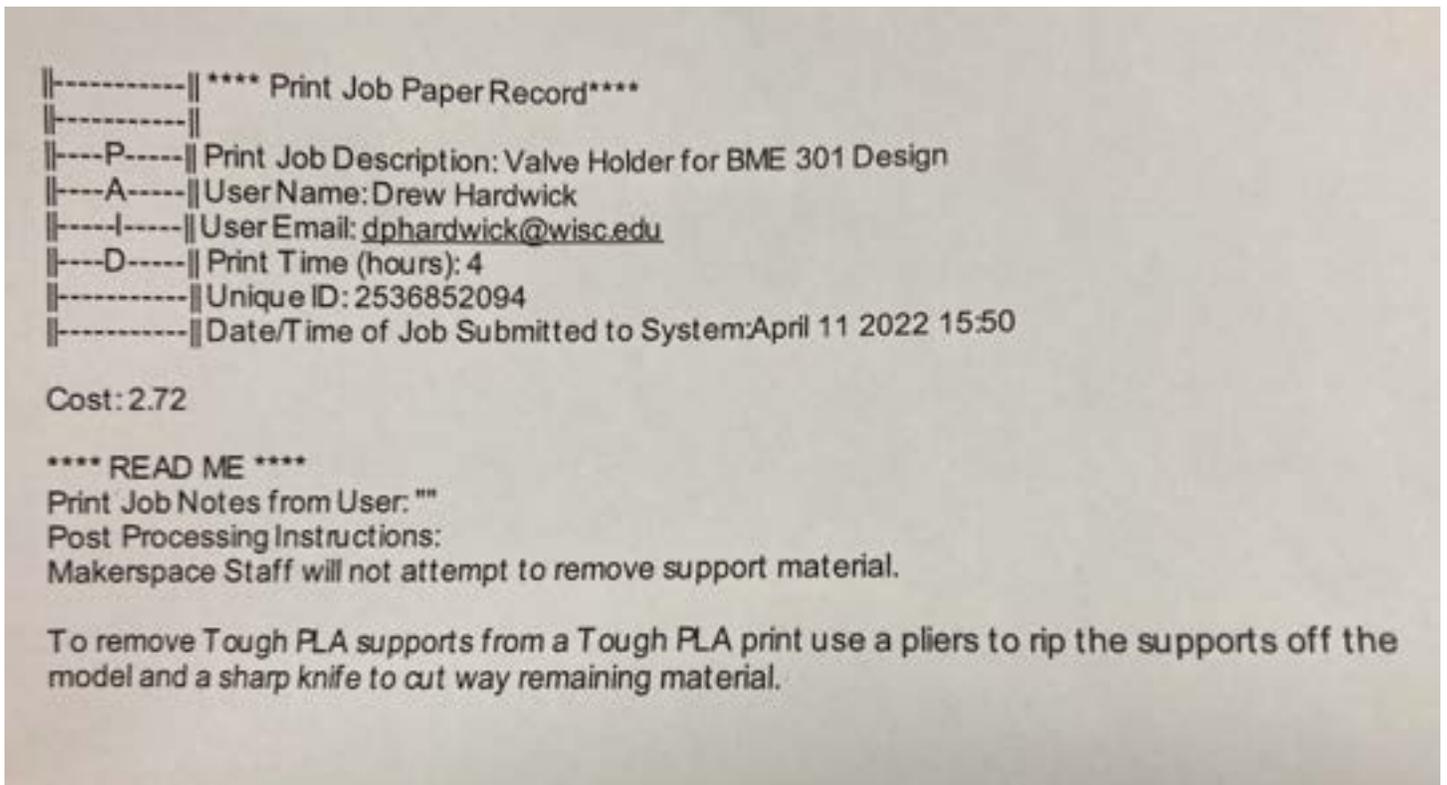


FIGURE 2: Receipt

Conclusions/action items:

- Test apparatus



Caulking Final Prototype - 4/12/22

Drew Hardwick - May 03, 2022, 10:43 PM CDT

Title: Waterproofing Final Prototype

Date: 4/12/22

Content by: Drew

Present: Everyone

Goals: Waterproof the acrylic box

Content:

- With the box finally fabricated, the team meeting this week focused on getting the prototype assembled
- Katie and Sam worked on soldering the copper tubes together, while I worked on Caulking the interior of the acrylic frame
- based on my previous research, I was able to rent a caulk gun and silicone caulk from the TEAM lab
- After rewatching a youtube video to refresh myself on how to use the caulk gun, I started lining the box
- Both the outer edge, and the inner edge where the culture well sits had to be waterproofed to prevent leakage
- After applying a constant stream of caulk to all edges, I used q-tips to spread the caulk and make sure all parts of the crease are evenly coated.
- A sample of the caulk lining can be seen below:



FIGURE 1: Caulk Lining (DRIED)

- This Caulk lining takes over 24 hours to dry, so the team will wait for it to dry, and then conduct leakage testing to see if the well is truly water proofed

Conclusions/action items:

- Test seal when caulk is dried



CO2 Past Teams' Progress 2/15/22

Drew Hardwick - Feb 22, 2022, 11:07 AM CST

Title: Past Teams' Progress on CO2

Date: 2/15/22

Content by: Drew Hardwick

Present: N/A

Goals: Figure what went wrong with 2017 design (and other years), and how we can adapt/improve

Content:

2020:

- Never appeared to actually fabricate or test CO2

2017:

- A feedback control loop was used to adjust the CO2 injection rate and temperature appropriately, depending on the input from sensors.
 - Code was designed to cause larger additions and thus larger increases in CO2 or temperature following openings of the chamber.
 - This system also allowed for much smaller adjustments to be made during regular operation.
- To test environmental control in the preliminary prototype, temperature, humidity, and CO2 measurements were taken over the course of about 6 hours.
- The primary difficulty encountered during culture was stability of CO2 concentration.
 - While the MHZ-16 was specified to measure with a 200 ppm accuracy and the data in Figure 1 (below) shows relatively steady state CO2 measurement of 50,000 ppm (5%), during cell culture media was observed to yellow.
 - This indicates a rise above the set pH of 7.4 and was the likely factor behind decreases wound healing observed in the test sample.
 - The results of this testing suggest that the MHZ-16 were not stable in measurement. As a result, the feedback loop controlled by its output allowed for fluctuations in concentration.

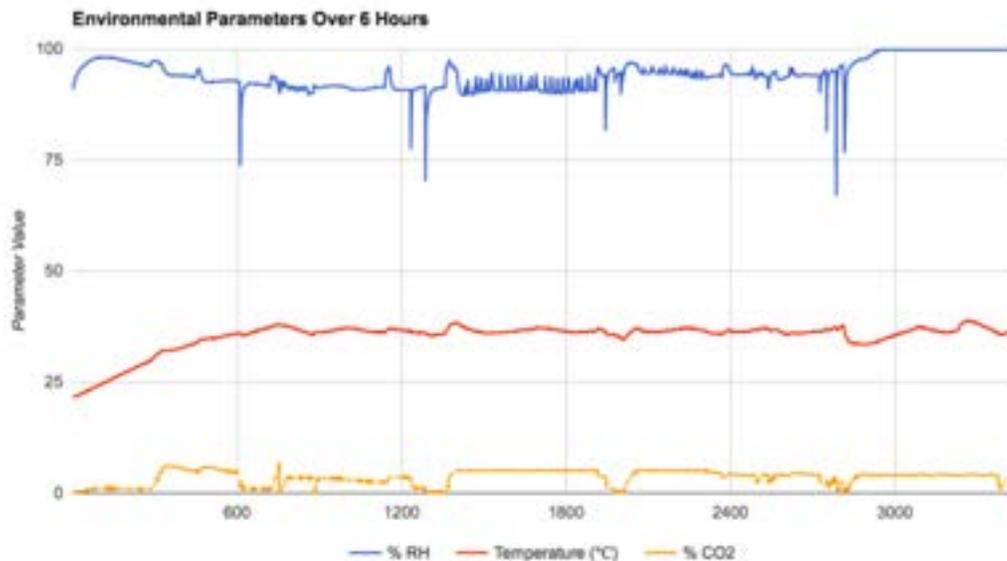


Figure 1: 2017 team environmental testing results

- A second difficulty encountered in CO2 control was the lack of control over pressure behind the CO2 valve.
 - The pressure gauge was manually controlled and as a result, made it difficult to achieve consistent feedback control when opening the solenoid valve to increase CO2 concentration.

- The design that has been created is able to sense and alter chamber temperature, humidity, and CO2 to relevant physiological conditions based on environmental changes
- However, longer-term environmental tests and adjustments to the CO2 buffering must be performed prior to application in research

2016:

- While testing proved the control system accuracy and stability over time, the CO2 set point, 0.65%, was significantly below the desired specification of 5%.
- Could have injected enough CO2 to reach this concentration in the chamber, the sensor that was purchased was unable to detect any amount of CO2 greater than 1%
- Increasing this set point will be a trivial test once a new sensor with a higher concentration limit has been obtained.

Conclusions/action items:

- The team is using the same CO2 sensor as purchased by the 2017 team, so potentially tweaking their design to allow for more easy buffering is a possibility



Arduino CO2 Incubator Possible Design - 2/18/22

Drew Hardwick - Feb 22, 2022, 12:00 PM CST

Title: Arduino CO2 DIY Incubator

Date: 2/18/22

Content by: Drew Hardwick

Present: N/A

Goals: Learn more about possible arduino setups

Content:

DIY CO2 Incubator - Arduino and Circuits:

- The electronics and code are primitive
 - An Arduino UNO simply monitors temperature and CO2 content and turns on/off the heaters or open/closes the solenoid valve as necessary to maintain the various setpoints
 - It works and mammalian cells can be grown and differentiated
- The Arduino is essentially operating four simple circuits:
 - Control of a 12V DC fan
 - Reading temperature sensors
 - Reading the CO2 sensor
 - Relay control to supply 12V to the heaters (on/off) or to the solenoid (open/closed).
- NOTE: images below do not show 12V power supply - Using a DC barrel adaptor, connect a 12V supply to one set of rails and the Arduino 5V to the other (with common ground) - images indicate which set of rails the 12V supply should be connected to.

ARDUINO CODE CAN ALL BE DOWNLOADED!!! GOOD STARTING POINT AT LEAST!!

Fan:

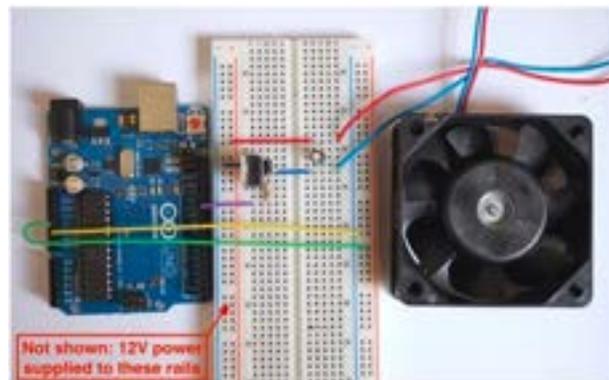


Figure 1: Circuit for Fan Control

- Fan helped to keep the atmosphere well mixed and the temperature fairly stable.

CO2 Sensor:

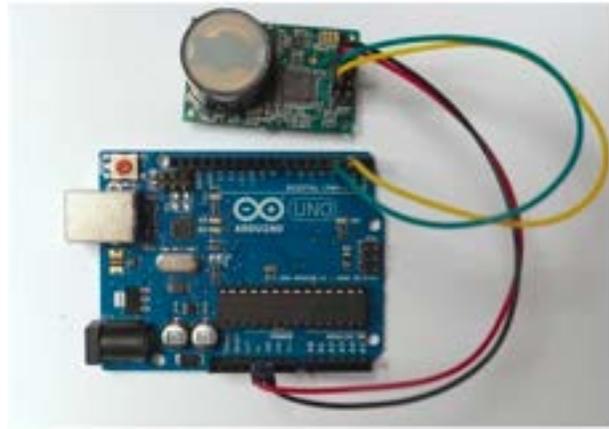


Figure (2): CO2 Sensor and Arduino Control

- For CO2 sensing, used NDIR based sensor from co2meter.com (GC-0017, 0-20%)
 - There are only 4-pins to care about on the sensor (GND, 3.3-5.5VDC, Rx, Tx) and its very easy to hook up
- An Arduino library was developed for this CO2 sensor so not much work to get it up and running
- Checked the calibration by exposing the sensor to a commercial premix of 5%/95% CO2/Air gas from BOC
 - Upon exposure to the 5% CO2 premixed gas, obtained CO2 readings from 3 different sensors by placing each sensor inside of an airtight container with a gas inlet and a syringe acting as a small outlet
 - Under pressure, flooded the premixed gas into the box and started recording
 - For each sensor, made three 180sec recordings and then averaged all 9 measurements together to produce the plot below

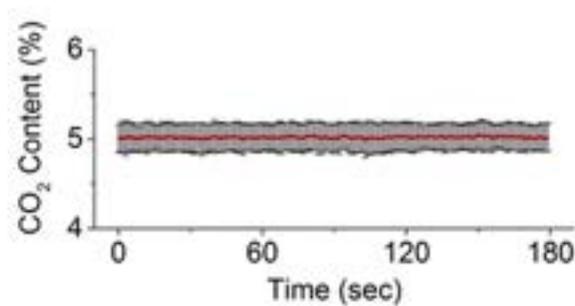


Figure (3): CO2 sensor testing

- On average, exposure to a commercial premixed gas of 5%/95% CO2/Air, resulted in a stable CO2 reading of $5.01 \pm 0.15\%$. This is well within the noise characteristics of the sensor.

Control over Solenoid (CO2 input):

- employed two identical relay switches to supply 12V power to the heaters or the solenoid
- pictures and code here are for a single relay, so will have to double up
- using a pretty standard SPDT relay from sparkfun which is very easy to setup. This one is the 5-pin variety so note that the wiring will change very slightly for 6-pin SPDT relays. There are also lots of pre-built relay modules out there that are simple to implement.
- Controlling relay is very easy
 - Setting an Arduino digital pin HIGH allows one to employ a transistor to trigger the relay switch with 5V from the Arduino
 - Once the switch has been triggered, 12V power can supply your load
 - Setting the digital pin LOW closes the switch - Therefore, the relays can be used to selectively supply power to a heater or to a solenoid

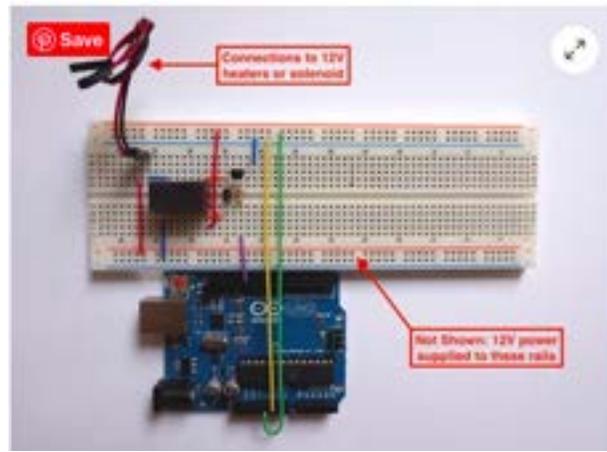


Figure (4): Solenoid arduino setup


Perfboard Setup:

Figure (5): Perfboard setup

- Can eliminate all temperature elements (have own heating method)

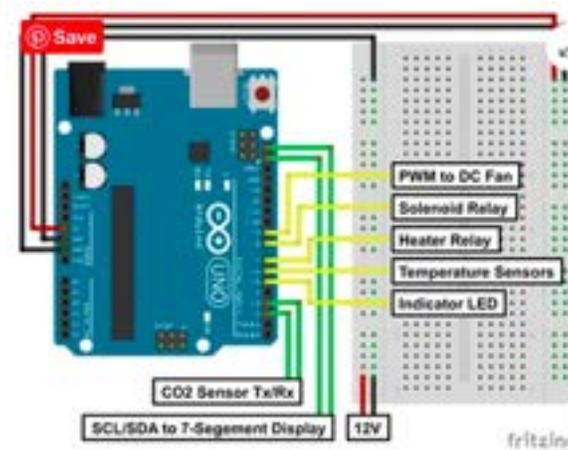CO2 Control Results:

- When the CO2 content of the incubator drops below 80% of setpoint (for example 3.5% with a setpoint of 5%), the solenoid opens allowing CO2 to rapidly fill the incubator
- If the CO2 level is above 80% of the setpoint (for example 4.5% with a setpoint of 5%), the solenoid only opens for 0.2 sec, closes and another reading is taken
 - This cycle continues until the setpoint is reached. This approach allows the CO2 content to step up to the setpoint and minimizes over-shooting.
- All the parameters (setpoint, thresholds, relay on times) modulating the control of the system are defined by the user
 - The default values in the Arduino control code work well for the incubator being described here
 - Values for the Temperature and CO2 setpoints (36.9 and 4.8, respectively), thresholds (0.98 and 0.8, respectively) and on times (1000 and 200, respectively) were chosen to achieve a stable reading of 37°C and 5% CO2

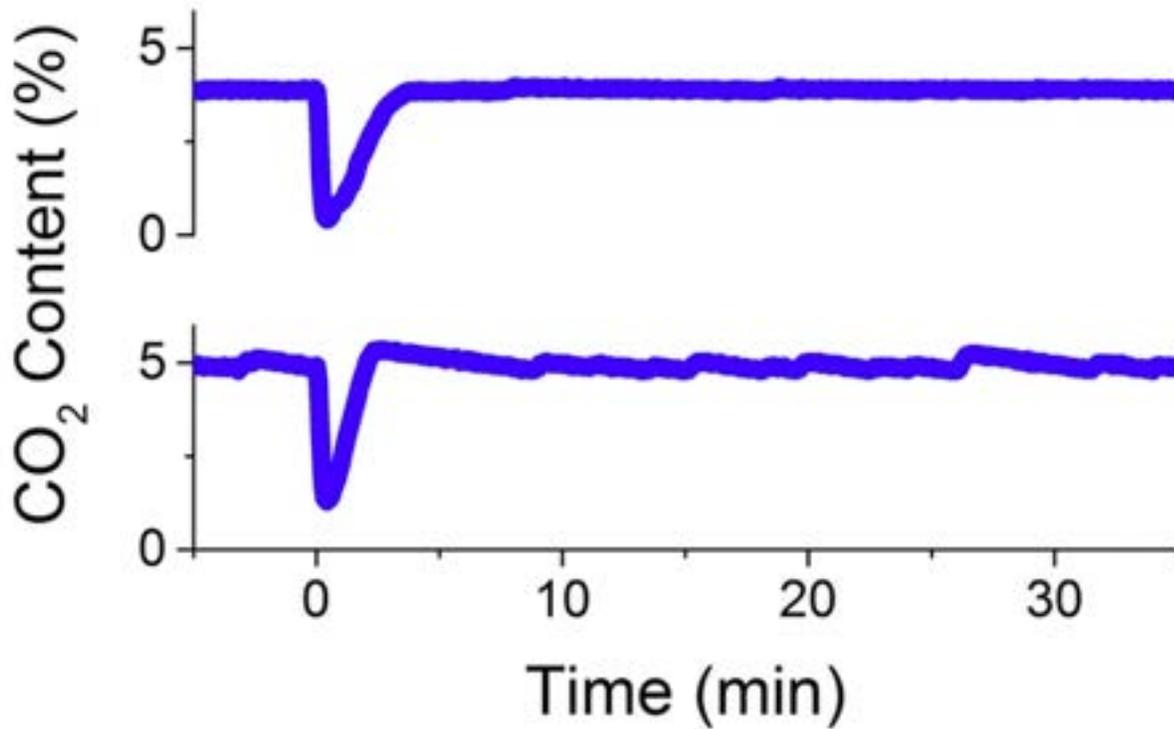


Figure (6): CO2 Testing Results

- Opening the door of either incubator results in a rapid decrease in CO₂, approaching regular atmospheric levels
- Surprisingly, the recovery time of both incubators was observed to be quite similar, however the DIY incubator did tend to display a small overshoot
 - What is clear from the data, is that the commercial incubator was able to maintain a more stable CO₂ content over time
 - The DIY incubator displays fluctuations of about $\pm 0.2\%$ (in other words, $\sim 4\%$ of the target value of 5%)
 - In this case, the average stabilized CO₂ level in the middle of the incubator was $\sim 4.9\%$
- mammalian cells (mouse cell lines and primary human cells) did not appear to be affected by the small CO₂ fluctuations that were observed in the DIY system.

Conclusions/action items:

- This is very good starting reference point for CO₂ sensing
- Speak with Katie and see what she thinks and if temperature/humidity unit could be integrated with this

References:

- A. Pelling, "DIY CO₂ Incubator - Arduino and Circuits," *PELLINGLAB*, Dec. 14, 2014. <https://www.pellinglab.net/post/diy-diy-co2-incubator-arduino-and-circuits> (accessed Feb. 18, 2022).



CO2 Valve Holder Brainstorm Session 4/5/22

Drew Hardwick - May 03, 2022, 9:01 PM CDT

Title: CO2 Valve Holder Brainstorm Session

Date: 4/5/22

Content by: Drew H

Present: N/A

Goals: Brainstorm possible solutions/attachments to regulate CO2

Content:

- After Seeing the CO2 tank, which was finally delivered to the lab, during our team meeting, we had to figure out the easiest way to regulate CO2
- Although after speaking to the client, I realized a solenoid Valve would be most likely the most effective way to regulate CO2, we would also have to purchase new parts and develop a new circuit, so as a team we decided to try and continue with the DC motor idea
- This means controlling a DC motor from the Makerspace with a micro-controller, and 3D printing a valve piece that will attach to the motor and valve on each end and turn the master CO2 valve to open/close CO2 flow into the incubator when the motor spins
- I am tackling 3D modeling and printing this piece, and shown below are a couple preliminary sketches:

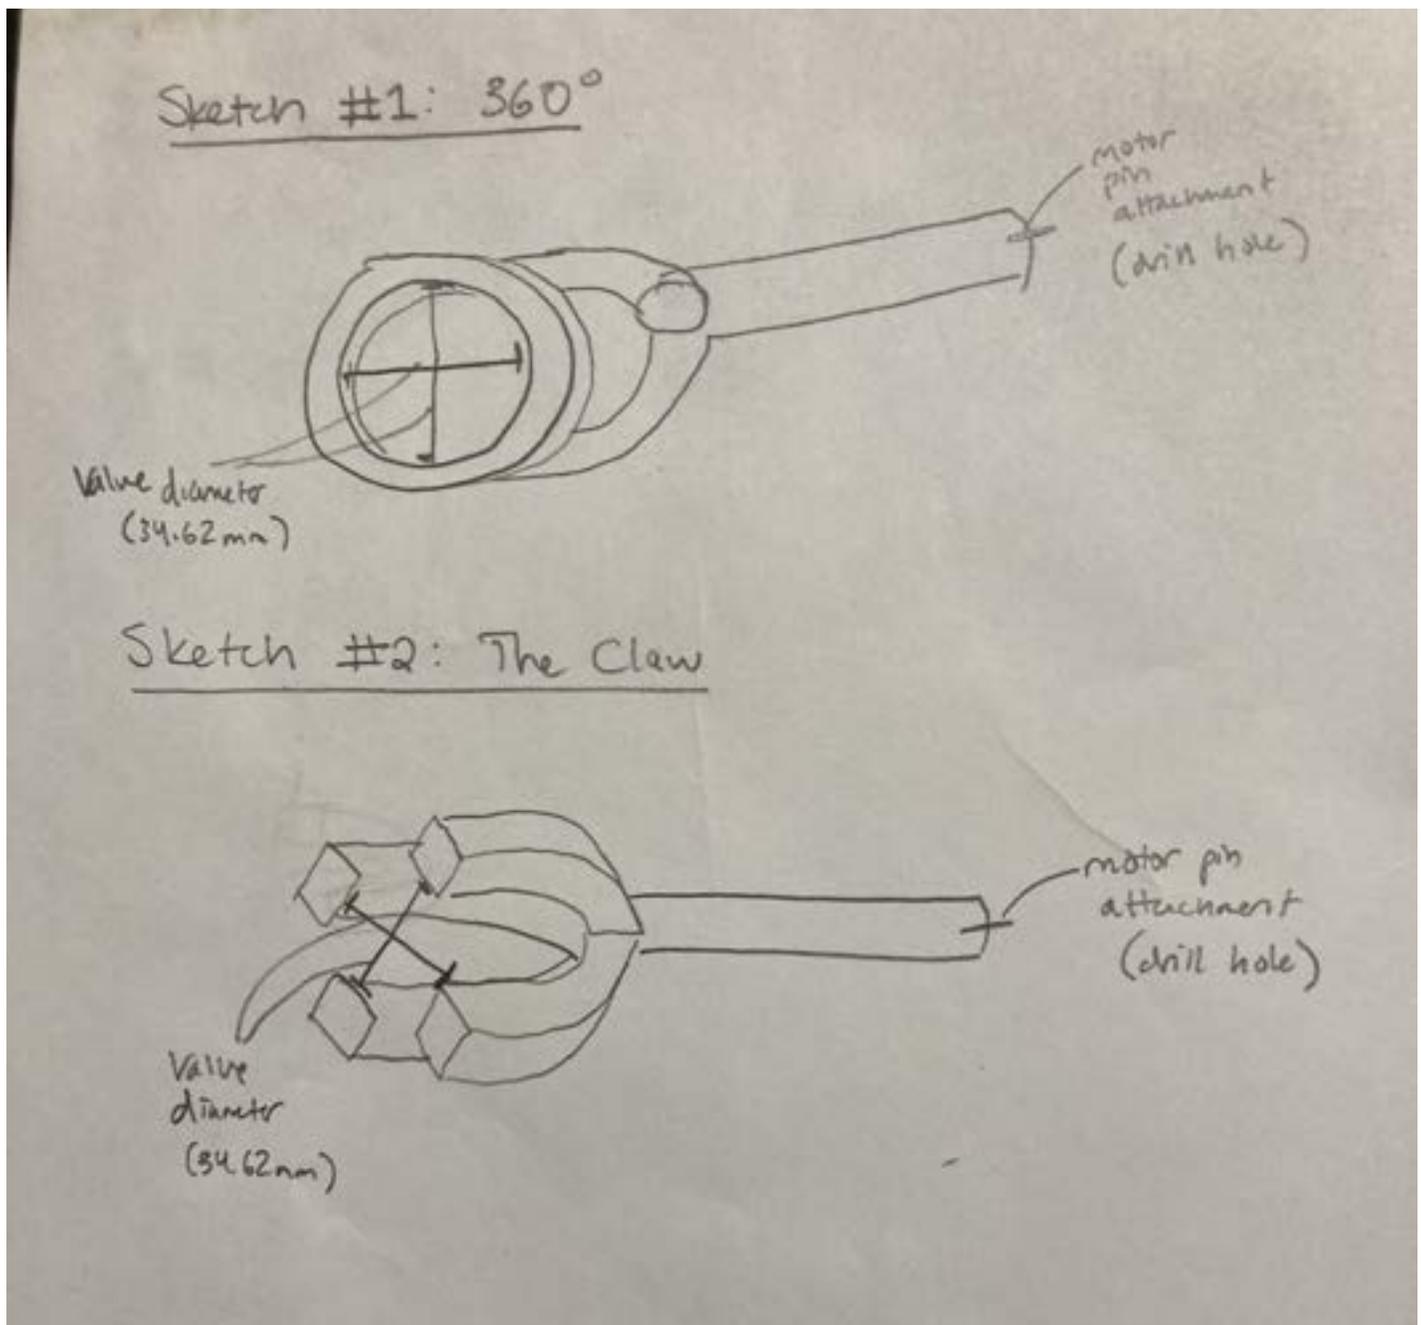


FIGURE 1: Design Sketches for CO2 Valve Adaptor

- The first Design I thought would be best for actually gripping the Valve due to it gripping the valve like a sleeve at all 360 degrees
 - It would have greater surface area contact and frictional contact with the valve than the second design, as well as being less brittle since the torque will be more evenly distributed
- The 2nd Design would be easier to draft in SOLIDWORKS and would be easier to modify if the fit to the valve is not absolutely perfect
 - If the first design doesn't fit perfectly to the valve or it slips at all, it will be hard to tighten without creating a completely new piece
 - The second design will hopefully have a little more give and flexibility/room for error despite being more likely to fracture because the arms can be pinched in to grip the valve by an elastic outer force (like a rubber band)
- After attempting to model on SOLIDWORKS I selected the second design due to it being much easier to model and due to it being more easily modified

Conclusions/action items:

- Finish SOLIDWORKS images and print part



Temperature, Humidity and Leakage Testing - 4/19/22

Drew Hardwick - May 03, 2022, 11:24 PM CDT

Title: Temperature, Humidity and Leakage Testing

Date: 4/19/22

Content by: Drew

Present: Everyone

Goals: Test Temperature reading, Humidity reading, and Leakage in the well at our weekly team meeting

Content:

Temperature/Humidity:

- The incubator was initially warmed up using a heated water pump, which pumped water at 55°C, for approximately 5 minutes, until it was lowered to about 34°C.
- The results from testing the incubator's temperature over approximately ten minutes showed an average temperature of 37.6°C.

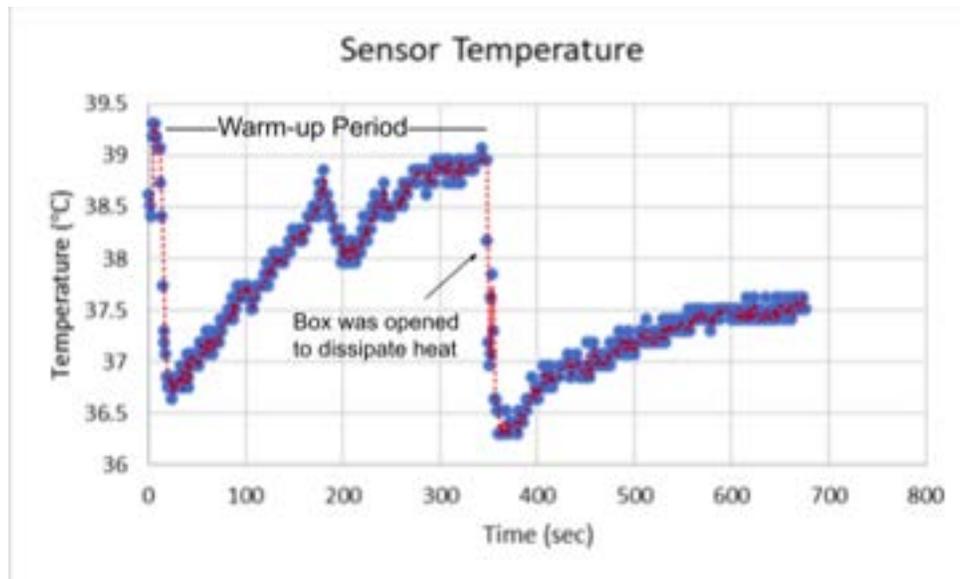


FIGURE 1: Full Incubator Temperature Testing results

- Humidity testing was set up under the same conditions (initially it was recorded with the temperature testing but the humidity formula had to be revised so it was conducted separately)
- An average humidity of 97.1% was found to be maintained over the 10 min testing interval

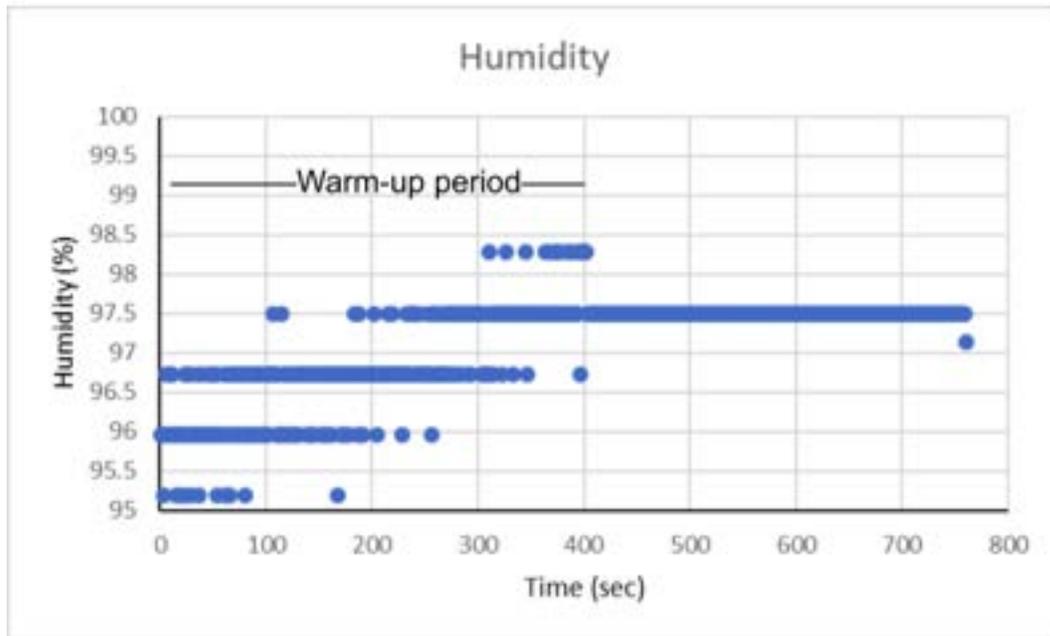


FIGURE 2: Full Incubator Humidity Testing results

- Leakage testing was also conducted (prior to temperature and humidity testing) by simply filling the incubator with the water bath and seeing if any leakage occurred
- We found no leakage at any point during all tests!!!
- This means the Silicone Caulk sealant worked!



FIGURE 3: Leakage testing Setup

Conclusions/action items:

- Work on deliverables and conduct CO2 and recovery testing next week
- Temperature and humidity are working properly!!! (better than expected)
- No leakage as well !!!



CO2 and Recovery Testing - 4/26/21

Drew Hardwick - May 04, 2022, 12:04 AM CDT

Title: CO2 and Recovery Testing

Date: 4/26/21

Content by: Drew

Present: Everyone

Goals: Test recovery and CO2 at weekly team meeting

Content:

CO2 Testing

- The 3D printed DC motor attachment was glued to the DC motor which was plugged into the micro controller
- The micro controller was able to spin the printed attachments easily, and at high speeds, but when tested with the application of slight resistance (ones finger) the system stopped spinning
 - This lead us to think that the torque from this cheap, small motor will not be sufficient
- We decided to test this anyways, and the 3D printed attachment was fixed on the CO2 valve
- When we executed the code from the micro controller, we confirmed our suspicions
 - The motor did not have the power to turn the valve at all
 - Furthermore, the motor was not attached to the breadboard by anything other than the studs, and when power was supplied to the motor, the torque was enough to break off the studs powering the motor, but not to turn valve

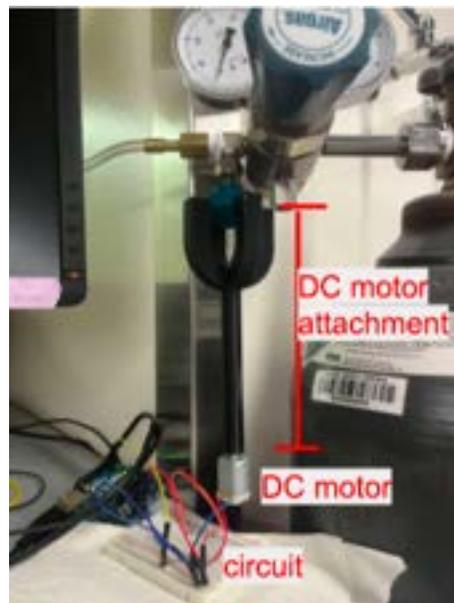


FIGURE 1: CO2 Testing Setup



FIGURE 2: Broken DC Motor

- Because of the motor breaking, the team was unfortunately unable to collect any meaningful CO₂ data (other than testing the CO₂ sensors)

Recovery Testing:

- Recovery testing was completed in order to assess how well the incubator responds to a disturbance in the environment (like opening the lid for example)
- The first recovery test showed that after 30 seconds of disruption in the incubation chamber the temperature was able to reach optimal conditions within approximately 3 min
- The second recovery test showed that after 30 seconds of disruption in the incubation chamber the humidity was able to reach optimal conditions after 3 min 23 sec
- Humidity values during testing went over 100% however, which is not theoretically possible
 - Supersaturation caused this we concluded
 - We also concluded that although the values are over 100%, the recovery testing was still accurate and showed optimal recovery time.

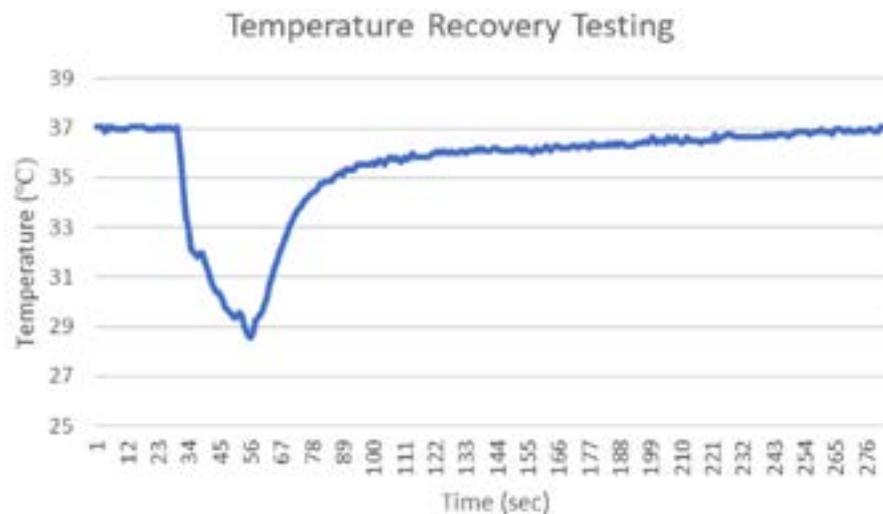


FIGURE 3: Temperature Recovery Testing results



FIGURE 4: Humidity Recovery Testing results

Conclusions/action items:

- Recovery Testing Worked well
- CO2 testing needs entire redesign



WARF Lecture Notes - 3/11/22

Drew Hardwick - Mar 20, 2022, 9:47 PM CDT

Title: WARF Lecture Notes and Conclusions

Date: 3/11/22

Content by: Drew Hardwick

Present: N/A

Goals: Learn about what WARF is and what they do

Content:

- WARF is non profit not affiliated with university, except for chancellor seat on board
- aim to support scientific research and thought within the university with funds and exposure
- UW 6th overall in university research funding, 300-400 invention disclosures each year and close to 3000 patents throughout the history of WARF (1 billion \$ of sales each year)
- WARF has given over 3 Billion \$ back to UW and over 200 Million \$ back to inventors as royalties
- Patents
 - machines, devices, compounds, methods, improvements
- Trademarks
 - words, phrases, colors, pictures, logos, sound
- Copyrights
 - literally works, webpages, software
- Prior Art = anything ever done before your invention concerning your invention/ideas
- US patent = time expensive and 30000\$
- License = contract with company allowing company to use patent
 - WARF Accelerator program - milestone based validation funding to speed promising technologies to a commercial license

Conclusions/action items:

I think that our design can definitely qualify for intellectual property in the future when we get it up and running since there really is no cheap, portable incubator alternative on the market now. If we could market our final product as a kit for use in labs like the teaching lab, where everything needed to get the portable, reliable, cheap cell culture incubator running is within the kit, that would be a product like no other out there now, and we could definitely pursue a patent.



Bioentrepreneurship Lecture Notes - 1/1/22

Drew Hardwick - Apr 01, 2022, 12:25 PM CDT

Title: Bioentrepreneurship Lecture Notes

Date: 1/1/22

Content by: Drew Hardwick

Present: N/A

Goals: Learn as much as possible

Content:

- entrepreneur = person who organizes/operates business, taking on greater financial risks to do so
 - innovator or developer who recognizes/seizes opportunities and capitalizes on those opportunities adding time, value or funds
- StrataGraft skin substitute takes 20 years to reach approval
 - Tissue engineering a slow process!
-

Conclusions/action items:

 **Background**

Drew Hardwick - Dec 13, 2022, 8:13 AM CST

Title: Background**Date:****Content by:** Drew Hardwick**Present:** N/A**Goals:** Describe Project Background**Content:****NOTE: SEE PREVIOUS SEMESTERS WORK FOR MORE BACKGROUND RESEARCH**

- Cell cultures - used in the study of cell biology to easily manipulate genes, molecular pathways, and culture systems to remove interfering genetic and environmental variables f
- follow BioSafety Level 2 guidelines
 - describe the safety procedures for working in a lab that can be associated with human diseases
 - incubators being used in conjunction with cell cultures must follow ISO Class 5 air quality standards
- Cell cultures have the ability to work with three different cell types: primary, transformed, and self-renewing cells
 - Primary - directly isolated from human tissue
 - Transformed - can be generated naturally with changes to the genetic code, or genetically manipulated
 - Self-renewing - carry the ability to differentiate into a variety of other cell types with long-term maintenance in vitro
 - Ex = embryonic stem cell
- Incubators used in cell cultures have to maintain a stable microenvironment and can achieve this via regulated temperature, humidity, CO₂, O₂, and pH levels
 - Critical for the viability and growth of the cultured cells
- Aiming to replicate conditions in the body (37 °C with a pH of 7.2-7.4)
- CO₂ is needed as a buffer to help with the pH along with a culture medium
 - Basal medium most commonly used - controls the physicochemical properties of the cell cultures' pH and cellular osmotic pressure

Conclusions/action items:

- See PDS and Previous semester research for more background research



9/20/22 - Conductive Glass

Drew Hardwick - Sep 23, 2022, 8:58 AM CDT

Title: Conductive Glass Research

Date: 9/20/22

Content by: Drew Hardwick

Present: N/A

Goals: Learn more about how conductive Glass works and its applications

Content:

- commercial method involves sputtering indium-tin oxide, which means a high vacuum and some high voltages
 - Expensive and difficult - not worth purchase or time for us
- DIY:
 - stannous (tin) chloride and ammonium bifluoride in solution
 - sprayed uniformly onto the heated glass (350-400° C), and after it's evaporated there is a thin, strong, and transparent layer of fluorine-doped tin oxide
 - Results in resistances down in the single-digit Ohms per square
 - https://www.youtube.com/watch?v=R9_5HOSZO_k&t=124s
- This would be a lot of work and require the purchase of a Cl/Ammonium Bifluoride solution
 - Maybe could be found in TEAM Lab/ECB??

Conclusions/action items:

- I am unsure how effective conductive glass will be - it will be lots of work and cost a significant chunk of the budget, plus, with our current design we will only be able to heat the top glass plate because otherwise, we will be heating the cells, which are resting on top of the plate
- Seems like it is more trouble than it is worth

References:

- "DIY Conductive Glass You Could Actually Make | Hackaday." <https://hackaday.com/2017/03/20/diy-conductive-glass-you-could-actually-make/> (accessed Sep. 23, 2022).



9/20/22 - How a solenoid Valve works

Drew Hardwick - Dec 10, 2022, 6:50 PM CST

Title: How a Solenoid Valve Works

Date: 9/20/21

Content by: Drew Hardwick

Present: N/A

Goals: Learn exactly how a Solenoid Valve Works

Content:

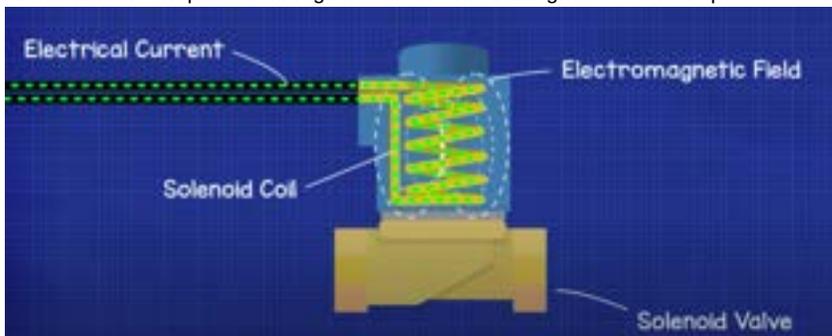
CONTEXT: looking into using a solenoid valve to autonomously control the flow of CO₂ gas into the incubator. We need something that can be controlled via arduino, and can quickly and accurately adjust to allow the incubator's internal environment to stay at 5% CO₂.

https://www.youtube.com/watch?v=-MLGr1_Fw0c


- Converts electrical energy to mechanical energy
- Valve body (valve) Connected to electronics box (solenoid)




-
- Shape of valve depends on capacity, pressure, and different internal mechanisms
- these valves Allow engineers to autonomously and remotely control flow (liquid or gas) within a system - no need to physically open valves
 - more efficient and safer
- Solenoid Coil has current passed through it to create electromagnetic field and operate valve



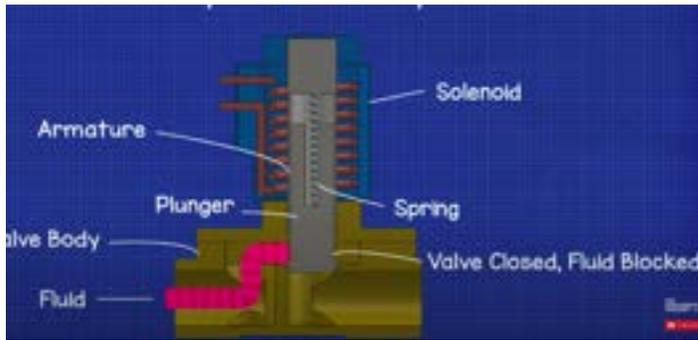-
- Solenoid valves EVERYWHERE:
 - Washing Machines, HVAC, Space Rockets, and everything in between
- Can purchase NO (normally open) or NC (normally closed) valves depending on needs
- Solenoid Placed OVER armature



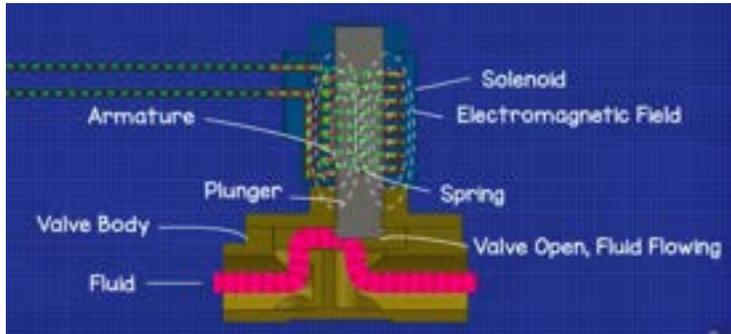- o
- o Inside Armature is plunger and spring - spring pushes plunger down in NC valve, indefinitely blocking flow
- o If coil receives electric signal, generates electromagnetic field, passes through spring/plunger and causes it to move up and the fluid/gas flows through valve



- o
- o @ center of coil, magnetic field lines are most compact and therefore the strongest - why plunger is in center
- o When current stops, electromagnetic field disappears, and spring forces plunger down to close valve indefinitely again
- NO valve is the same, but spring keeps plunger up, not down - everything reversed
- Direction of current into coil is what determines whether it is a NO or NC valve

Conclusions/action items:

- We should use a solenoid valve
- FIND A CHEAP ONE!
- This is the best option for us to control the input of CO2 into the incubator system.

References:

- The Engineering Mindset, *How Solenoid Valves Work - Basics actuator control valve working principle*, (Mar. 03, 2019). Accessed: Sep. 23, 2022. [Online Video]. Available: https://www.youtube.com/watch?v=-MLGr1_Fw0c

Comments

Amit Nimunkar

Dec 10, 2022, 2:09 PM CST

Please make some comments on what aspect of the project this could be tie into.



Previous Competing Designs

Drew Hardwick - Dec 13, 2022, 8:06 AM CST

Title: Competing Designs

Date:

Content by: Drew Hardwick

Present: N/A

Goals: Keep Up to date on current incubators on market

Content:

- **SEE PDS FOR MORE COMPETING DESIGNS INFO**
- Two types of commonly used methods to maintain temperature in industry cell incubators
 - Direct heat method - tends to give off heat using electric metal coils surrounding body of incubator
 - programmed to desired temp
- The other method is the water-jacketed incubators
 - Use a controlled circulating water bath cabinet around the body of the incubator for even heating throughout the entirety of the chamber.
- Humidity control achieved by placing a tray of water at the bottom of the incubator
 - Used in both water-jacketed and direct heat incubators
- CO₂ control achieved through a CO₂ tank
 - automatically pumps the desired amount of gas into the incubator
 - Using tubes and a valve connector, the CO₂ tank is able to deliver gas to the inside of both water-jacketed and direct heat incubators
 - Many incubators allow CO₂ reg to adjust when internal conditions are disturbed
 - Ex: opening the incubator door to deliver more cell plates, so that the environment is always stable.
- Direct heat method ex: In-Vitro Cell NU5700
-



- "The NU-5700 CO₂ incubator offers touch panel control and monitoring of temperature and CO₂ levels to meet the demands of a broad range of cell culture applications. Beyond using an infrared sensor for precise control of CO₂ and

separately adjustable door and perimeter heaters to balance internal temperature. The air pump outside the 160L growth chamber also constantly draws air through a HEPA filter and cycles it back to create ISO Class 5 quality air at positive pressure and minimize contamination. A touch screen makes it easy to enter set points and view or download historical performance. In addition, this moderately sized incubator can be stacked and still allow the user easy access to the top chamber."

- Price not listed, need to get a quote... --> very very expensive
 - Online estimates ~ \$10,000
- Indirect Heat Method Ex: Ibidi Stage Top Incubator Multiwell plate



- "A stage top incubator for high-throughput live cell imaging on inverted microscopes, with precise temperature regulation, active humidity control, and CO2 regulation
- Easy installation on inverted microscopes that have a K-frame fitting (160 mm x 110 mm)
- Ideal for long-term physiologic assays on the microscope: no evaporation due to precise, feedback-controlled humidity regulation
- Optimal heat distribution and no condensation in the Incubation Chamber
- Ideal for high-throughput live cell imaging in multiwell plates using motorized stages"
- Price not listed, need to get a quote... --> very very expensive
 - Online estimates ~ \$18,000
- THIS IS VERY SIMILAR TO OUR PROJECT

Conclusions/action items:

- Our design is needed
- Current incubators on market far too expensive



10/18/2022 Voltage Relay

Drew Hardwick - Oct 19, 2022, 1:17 PM CDT

Title: Voltage Relay Research

Date: 10/18/22

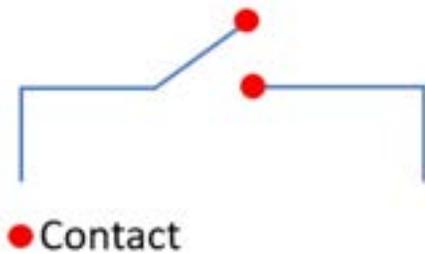
Content by: Drew Hardwick

Present: N/A


Goals: Understand how we could potentially use a relay if power supply for Solenoid does not work

Content:

- The relay module is an electrically operated switch that can be turned on or off deciding to let current flow through or not. They are designed to be controlled with low voltages like 3.3V or 5V like your Arduino.
- The relay is an electrically operated switch where the relay opens when the two contacts are disconnected, while the relay is closed when the two contacts touch. When set to high, the relay will close allowing current to flow.



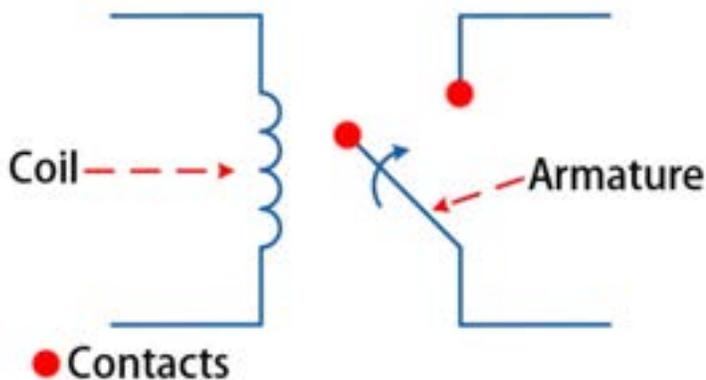- Even though there are many types of relays, electromechanical relays are the most commonly used. They consist of coils, armatures, and contacts:



- When the coil is energized, the induced magnetic field moves the armature, which opens or closes the contact.
- Each contact connects to an input or output terminal. The input terminal is called **Pole**, and the output terminal is called **Throw**.
- The SPST is the simplest relay, you can consider it as a button. They have 2 terminals that can be connected or disconnected. Including 2 for the coil, an SPST relay has 4 terminals in total
 - This switch is normally open and when the trigger signal comes, the pole contact will connect to the throw contact which causes the switch to be closed.
 - Use Grove Relay for this:
 - This is a simple electromechanical relay that can work low voltages like 3.3V like the ESP32, ESP8266 etc or the 5V like your Arduino with a max switching voltage 250VAC / 30VDC and current of 5A.
 - There is an indicator LED on the board, which will light up when the controlled terminals get closed.
 - This is an SPST relay which is great for applications that need only an on or off state.



- HOW TO SETUP:

- Firstly connect Grove-Relay to port D4 of Grove-Base Shield.
- Connect Grove-Button#1 to port **D2** of Grove-Base Shield and connect Grove-Button#2 to port **D3** of Grove-Base Shield.
- Plug Grove – Base Shield into Seeeduino.
- Connect Seeeduino to PC via a Micro-USB cable.
- Your connection should look something like this:



- If you do not have the base shield, you can directly connect the relay and button to the Arduino board by following the below connection:

Grove – Relay	Arduino	Grove Cable
GND	GND	Black
VCC	5V	Red
SIG	D4	Yellow

- CODE:

- // Relay Control

```
void setup()
{
  pinMode(2, INPUT);
  pinMode(3, INPUT);
  pinMode(4, OUTPUT);
}

void loop()
{
  if (digitalRead(2)==HIGH)
  {
    digitalWrite(4, HIGH);
    delay(100);
  }
}
```

```
    if (digitalRead(3)==HIGH)
    {
        digitalWrite(4, LOW);
    }
}
```

Conclusions/action items:

- This is a good option if power cord does not work

References:

- "Arduino Relay Tutorial: Control High Voltage Devices with Relay Modules," *Latest Open Tech From Seeed*, Jan. 03, 2020.
<https://www.seeedstudio.com/blog/2020/01/03/arduino-tutorial-control-high-voltage-devices-with-relay-modules/> (accessed Oct. 18, 2022).

Comments**Amit Nimunkar**

Dec 10, 2022, 2:12 PM CST

Please make sure to add an entry on current relay you are using in the project.



9/15/22 - Solenoid Valve Purchasing

Drew Hardwick - Sep 15, 2022, 8:32 PM CDT

Title: Grainger Solenoid Valve Options

Date: 9/15/22

Content by: Drew Hardwick

Present: N/A

Goals: Find affordable purchasing options

2-Way/2-Position, Normally Closed Remote Piloted Dust Collector Valves



These remote, piloted dust collector valves feature a normally closed valve configuration. They are ideal for use with air and inert gases. Rated for indoor and outdoor environments. Aluminum body construction.

Aluminum Body Material

↑ Pipe Size - Valves	Min. Operating Pressure Differential	Max. Operating Pressure Differential Air/Inert Gas	Environmental Rating - Valves	Media - Valves	Price
3/4 in	5 psi	125 psi	Indoor Outdoor	Air, Inert Gases	\$111.01

Content:

- This looks like a good potential Item to purchase - I will need to further research use and how compatible this item is
- 3/4 inch might be very big for the amount of CO2 we will be using - see below, smaller options

2-Way/2-Position, Normally Open Solenoid Valves



These solenoid valves feature a normally open valve configuration, and are ideal for use with air, inert gases, and water. Use in indoor or outdoor work environments. Normally open valves operate at low pressures with no minimum required. They are well suited for venting systems.

Brass Body Material

Pipe Size - Valves	Voltage	Min. Operating Pressure Differential	Max. Operating Pressure Differential Air/Inert Gas	Max. Operating Pressure Differential Water	Environmental Rating - Valves	Media - Valves	Price
1/8 in	120V AC	0 psi	160 psi	145 psi	Indoor Outdoor	Air, Inert Gases; Light Oil; Water	\$131.88
1/4 in	120V AC	0 psi	30 psi	30 psi	Indoor Outdoor	Air, Inert Gases; Light Oil; Water	\$136.62
1/4 in	120V AC	0 psi	90 psi	90 psi	Indoor Outdoor	Air, Inert Gases; Light Oil; Water	\$136.62
1/4 in	120V AC	0 psi	160 psi	145 psi	Indoor Outdoor	Air, Inert Gases; Light Oil; Water	\$139.46
1/4 in	120V AC	0 psi	275 psi	230 psi	Indoor Outdoor	Air, Inert Gases; Light Oil; Water	\$130.18

- These options are a little more expensive, but have smaller diameters and deal with higher pressures

1/8 in	120V AC	0 psi	145 psi	145 psi	Indoor Outdoor	Air, Inert Gases; Light Oil; Water	\$78.99
--------	---------	-------	---------	---------	-------------------	------------------------------------	---------



Solenoid Valve: 1/8 in Pipe Size - Valves, 120V AC, 0 psi Min. Op Pressure Differential, Brass, F

Item **44U335**

Mfr. Model **SC8356A002V**

[View Product Details](#)

Web Price ⓘ

\$78.99 / each

Expected to arrive **Mon, Sep 19.**

Ship to 53701 ▾

Qty

1

Add to Cart

- Cheapest option

1/4 in	120V AC	0 psi	36 psi	36 psi	Indoor Outdoor	Air; Inert Gases; Light Oil; Water	\$91.14
--------	---------	-------	--------	--------	-------------------	------------------------------------	---------



Solenoid Valve: 1/4 in Pipe Size - Valves, 120V AC, 0 psi Min. Op Pressure Differential, Brass, F
Item: **6WTV2**
Mfr. Model: **8262H090**
[View Product Details](#)

Web Price ⓘ
\$91.14 / each

Expected to arrive Mon. Sep 19.

Ship to 53701 ▼

Qty
1

Add to Cart

- Similar to above, but 1/4in diameter

Conclusions/action items:

- Need to further research how each valve attaches and works this week, but it appears possible to find decently cheap option on Grainger

References:

□ "Air, Oil and Water Solenoid Valves - Grainger Industrial Supply." https://www.grainger.com/search/plumbing/plumbing-valves/solenoid-valves-and-coils/air-oil-and-water-solenoid-valves?tv_optin=true&searchQuery=solenoid+valve&searchBar=true&tier=Not+Applicable (accessed Sep. 15, 2022).



9/21/22 - Makerspace Meeting

Title: Makerspace Meeting

Date: 9/21/22

Content by: Drew Hardwick

Present: N/A

Goals: Speak to UW Makerspace Staff Members to learn about Valve Options

Content:

- Spoke with Makerspace experts about any Valve Guidance they could possibly help with.
- I was hoping they would have cheap valves available for purchase at the Makerspace like the DC motor we purchased there for a couple of bucks last year
 - I figured that we did not need a large or expensive valve, just need it to open/close reliably enough to allow small incubator to fill to 5% +/- 0.5% CO2 at 14psi - very small amount
- Makerspace does NOT sell valves
- Still offered Guidance on project:
 - Recommended Solenoid Valve over ball valve or pin valve because solenoid valve can just have electrical signal applied and it opens/closes.
 - Ball valve or pin valve will need to hook up a servo or actuator to the valve to power the opening/closing and that just adds an extra step to the process
 - Just an extra step and extra complication involved with these valves that could be minimized if solenoid valve is used
 - Make sure to purchase a valve graded for gas, not just liquid, as the gas grade will have a better seal
 - The pressure should not be an issue for us, as the CO2 comes out at 14psi, and atmospheric pressure is very close at about 14.6psi
- Makerspace staff recommended speaking with someone at ACE hardware for more info on solenoid valves and potential cheap purchasing options
- They also recommended looking at McMaster Carr instead of Grainger for prices:

Compact Solenoid On/Off Valves

For technical drawings and 3-D models, click on a part number.

Brass Body with DIN Connection—Buna-N Rubber Seal



• For Use With: Water, Air, Argon, Helium, Neon, Xenon, Krypton

Pipe Size	Gender	Thread	Flow Coefficient (Cv)	Max. Pressure	Pressure Drop	Temp. Range, °F	Valve Lg.	O'ail Ht.	Each	
Normally Closed—24V AC										
1/4	Female	NPT	0.17	290 psi @ 140° F	Zero Pressure Drop	15° to 190°	1 5/8"	3"	8077K216	\$114.98
1/4	Female	NPT	0.29	100 psi @ 140° F	Zero Pressure Drop	15° to 190°	1 11/16"	2 9/16"	8077K226	83.82
1/4	Female	NPT	0.35	48 psi @ 140° F	Zero Pressure Drop	15° to 190°	1 9/16"	3 3/16"	8077K246	86.47
1/4	Female	NPT	0.58	110 psi @ 140° F	Zero Pressure Drop	15° to 190°	1 9/16"	3 3/16"	8077K236	86.47
Normally Closed—24V DC										
1/4	Female	NPT	0.17	230 psi @ 140° F	Zero Pressure Drop	15° to 190°	1 5/8"	3"	8077K217	114.98
1/4	Female	NPT	0.29	50 psi @ 140° F	Zero Pressure Drop	15° to 190°	1 11/16"	2 9/16"	8077K227	83.82
1/4	Female	NPT	0.35	20 psi @ 140° F	Zero Pressure Drop	15° to 190°	1 9/16"	3 3/16"	8077K247	86.47
1/4	Female	NPT	0.58	55 psi @ 140° F	Zero Pressure Drop	15° to 190°	1 9/16"	3 3/16"	8077K237	86.47
Normally Closed—120V AC										
1/4	Female	NPT	0.17	290 psi @ 140° F	Zero Pressure Drop	15° to 190°	1 5/8"	3"	8077K215	114.98
1/4	Female	NPT	0.29	100 psi @ 140° F	Zero Pressure Drop	15° to 190°	1 11/16"	2 9/16"	8077K225	83.82
1/4	Female	NPT	0.35	48 psi @ 140° F	Zero Pressure Drop	15° to 190°	1 9/16"	3 3/16"	8077K245	86.47
1/4	Female	NPT	0.58	110 psi @ 140° F	Zero Pressure Drop	15° to 190°	1 9/16"	3 3/16"	8077K235	86.47

Solenoid On/Off Valves



These solenoid valves operate on electricity to automatically start and stop flow. The actuator is directly mounted to the valve body to minimize movement and reduce wear.

Normally closed valves are closed unless actuated. Normally open valves are open unless actuated.

316 and 316L stainless steel valves are more corrosion resistant than brass and bronze valves.

Zero pressure drop valves don't require a minimum pressure drop between the inlet and outlet for operation. Pressure drop assisted valves require a minimum pressure drop between the inlet and the outlet for operation; the upstream pressure must be greater than the downstream pressure.

All IP- or NEMA-rated valves stand up to dust and washdowns. IP68 valves resist high-temperature, high-pressure washdowns. NEMA 4X valves withstand corrosive liquid.

Flow coefficient (Cv) is the amount of water (in gallons per minute) at 60° F that will flow through a fully open valve with a difference of 1 psi between the inlet and the outlet.

For technical drawings and 3-D models, click on a part number.

Normally Closed—24V AC

• For Use With: Water, Oil, Air, Argon, Helium, Neon, Xenon, Krypton
• Specifications Met: See table

Pipe Size	Flow Coefficient (Cv)	Max. Pressure	Pressure Drop	Temp. Range, °F	Valve Lg.	O'ail Ht.	Environmental Rating	Specifications Met	Valves		Replacement Solenoid Coils	Repair Kits for Flow-Control Valves		
									Each	Each	Each	Each		
Brass Body with DIN Connection—Buna-N Rubber Seal														
1/4	1.4	200 psi @ 70° F	Zero Pressure Drop	15° to 195°	2 1/4"	3 1/2"	IP65, NEMA 4	CE Marked	4711K013	\$123.78	2881N13	\$32.57	2875N15	\$7.43
1/2	1.4	300 psi @ 70° F	Pressure Drop Assisted	15° to 195°	2"	3 1/4"	IP65, NEMA 4	CE Marked	4735K137	86.22	2881N13	32.57	2875N15	40.23
3/8	1.4	200 psi @ 70° F	Zero Pressure Drop	15° to 195°	2 1/8"	3 1/2"	IP65, NEMA 4	CE Marked	4711K020	123.78	2881N13	32.57	2875N15	7.43

- Prices are about the same, maybe a little cheaper on McMaster Carr

- Sam found \$9 solenoid valve on Amazon here:

- https://www.amazon.com/4inch-Normally-Closed-Electric-Solenoid/dp/B074Z5SDG3/ref=asc_df_B074Z5SDG3/?tag=hyprod-20&linkCode=df0&hvadid=198072472254&hvpos=&hvnetw=g&hvrand=12924945941706346746&hvpone=&hvptwo=&hvqmt=&hvdev=c&hvdvcmdl=&hvlocint=&hvlocphy:360267761983&psc=1

Conclusions/action items:

- Grainger and McMaster Carr prices for the valve will eat up our budget
- I think that we should see if Pucc will allow us to purchase the amazon solenoid valve for budgeting purposes
- If not, we should check with experts and prices at ACE/Home Depot and consider purchasing externally as a team before we eat up our budget on Grainger or McMaster Carr

References:

[] "McMaster-Carr." <https://www.mcmaster.com/> (accessed Sep. 21, 2022).



9/21/22 - First Materials Purchasing Order

Drew Hardwick - Sep 23, 2022, 8:45 AM CDT

Title: First Materials Purchasing Request

Date: 9/21/22

Content by: Drew Hardwick

Present: All

Goals: Send our first Materials Purchasing Request to Puccinelli

Content:

Hi Dr. Puccinelli,

Attached to this email is the first Materials Purchasing Request of the year for our team! The team is picking up where we left off this semester by replacing the glass plates on the incubator with fresh, clear plates, and purchasing antifog spray to prevent the buildup of condensation due to humidity on the inside of these plates. We are also purchasing a solenoid valve to regulate the CO2 input and start work with the circuitry and fabrication associated with that. Please let me know if you have any questions.

Thank you!

-Drew Hardwick

University of Wisconsin - Madison, Class of 2023

Biomedical Engineering

dphardwick@wisc.edu

314-305-4739

Conclusions/action items:

Microscope Cell Culture Incubator**Title:** Mike Tomic, Sam Bennett, Kyle Day, Steve Popkewitz, Drew Hardwick**Date:** 10/1/22**Lab:** 1010 ECR**Address:** Aesthesis**Project Summary:** Develop a low cost cell culture incubator chamber with microfluidic culture platform is compatible with an inverted microscope and capable of live cell imaging.**Reagents/Materials for purchase:**

1. [Polycarbonate Transwell Inserts \(Corning/Costar\)](#) - 24 each, \$4.00 each
2. [New Polycarbonate Inserts - 24 for Imaging of cells](#)
3. [New Polycarbonate Inserts - 24 for Imaging of cells](#)
4. [New Polycarbonate Inserts - 24 for Imaging of cells](#)
4. [New Polycarbonate Inserts - 24 for Imaging of cells](#)

[Download](#)**Materials_Purchasing_Request_Fall_2022- Microscope_Cell_Culture_Incubator.pdf (49.2 kB)**



12/12/22 - BPAG Final Expenses

Drew Hardwick - Dec 12, 2022, 5:11 PM CST

Title: Final Expenses

Date: 12/12/22

Content by: Drew Hardwick

Present: N/A

Goals: Finalize Budget

Content:

Expenses

Item	Description	Manufacturer	Part Number	Date	QTY	Cost Each	Total	Link
Component 1								
Glass	Polycarbonate Transparent Thermal Insulation Sheets	RADNOR	64005034	9/21/22	4	\$1.21	\$4.84	Link
Component 2								
Solenoid Valve	¼ inch DC 12V 2 Way NC Electric Solenoid Air Valve	PL- Plum Garden	220101	9/21/22	1	\$9.35	\$9.35	Link
Component 3								
Anti-Fog Solution	Lens Cleaning Solution: Anti-fog/Anti-Static Silicone	Grainger	4T932	9/21/22	1	\$6.58	\$6.58	Link
Component 4								
G1/4" Soft Tubing Barbed Adaptor	Barbed Adaptors that screw into Solenoid Valve and attach plastic tubing connected to CO2 tank to valve, to incubator	outstanding	N/A	9/29/22	4	\$2.40	\$9.59	Link
Component 5								
TIP120 Transistor	Transistor needed to power the solenoid valve using an Arduino Circuit.	NTE Electronics, Inc	2368- TIP120- ND	10/3/22	1	\$1.00	\$1.00	Link
Component 6								
Black Acrylic	Black Acrylic needed to create the homogeneity testing lid. (½ x 18 x 24)	UW- Makerspace	N/A	10/17/22	1	\$10.75	\$10.75	Link
TOTAL:	\$42.11							

Conclusions/action items:



9/13/22 - CO2 Valve Types Research

Drew Hardwick - Sep 15, 2022, 8:21 PM CDT

Title: Potential CO2 Valves

Date: 9/13/22

Content by: Drew Hardwick

Present: N/A

Goals: Research Potential Gas Regulation Valves

Content:

- **Gate Valve:**

- Gate system to open or close a pipeline entirely
- Excellent choice if the flow rate needs to be controlled and maintained
- When the actuator completely opens the valve, the channel is unobstructed, allowing even slurry fluids like crude oil to flow easier
- Not an ideal candidate if throttling is required in an application, there is not a noticeable pressure drop when this valve is used.



◦

- Only appropriately Priced Gate Valves on Grainger are manual, so we need another option

- **Ball Valve**

- A ball valve is a shut-off valve that allows, obstructs, and controls the flow of liquids, gases, and vapors in a piping system by rotating the ball having a bore inside the valve
- The ball is mounted against two seats and has a shaft that connects it to the operating and control mechanism that rotates the ball
- When the cross-section of the bore is perpendicular to the area of the flow, the fluid is not permitted to pass through the valve. The fluid flows through from the valve, and the fluid flow rate depends on the area of the bore exposed to the flow.
- Can be motorized like below GOOD POTENTIAL OPTION (\$89.95 @ www.electricsolenoidvalves.com)



◦

- **Solenoid Valve**

- A solenoid valve is an electrically controlled valve. The valve features a solenoid, an electric coil w/ movable ferromagnetic core (plunger like) at center
- In rest position, plunger closes off small orifice
- Electric current through coil creates magnetic field, exerting upwards force on plunger to open orifice
- Relatively Cheap, motorized



o

Conclusions:

- Ball and Solenoid Valves are good types to pursue

References:

- wsisme-norgascontrols, "7 Types of Gas Valves Used in the Oil & Gas Industry," *Norgas Controls*, Dec. 10, 2021. <https://norgascontrols.com/blog/valves/7-types-of-gas-valves-used-in-the-oil-gas-industry/> (accessed Sep. 13, 2022).
- "Gate Valves - Grainger Industrial Supply." https://www.grainger.com/search/plumbing/plumbing-valves/shut-off-valves/gate-valves?tv_optin=true&searchQuery=gate+valve&searchBar=true&tier=Not+Applicable (accessed Sep. 13, 2022).
- "1" Stainless Electric Ball Valve - 2 Wire Auto Return," *Electricsolenoidvalves.com*. <https://www.electricsolenoidvalves.com/1-inch-stainless-steel-motorized-electric-ball-valve-2-wire-auto-return/> (accessed Sep. 15, 2022).
- "Solenoid Valve - How They Work | Tameson.com," *Tameson*. <https://tameson.com/solenoid-valve-types.html> (accessed Sep. 15, 2022).



9/28/22 - Solenoid Control Code via Arduino

Drew Hardwick - Dec 13, 2022, 7:37 AM CST

Title: Solenoid Control Via Arduino

Date: 9/28/22

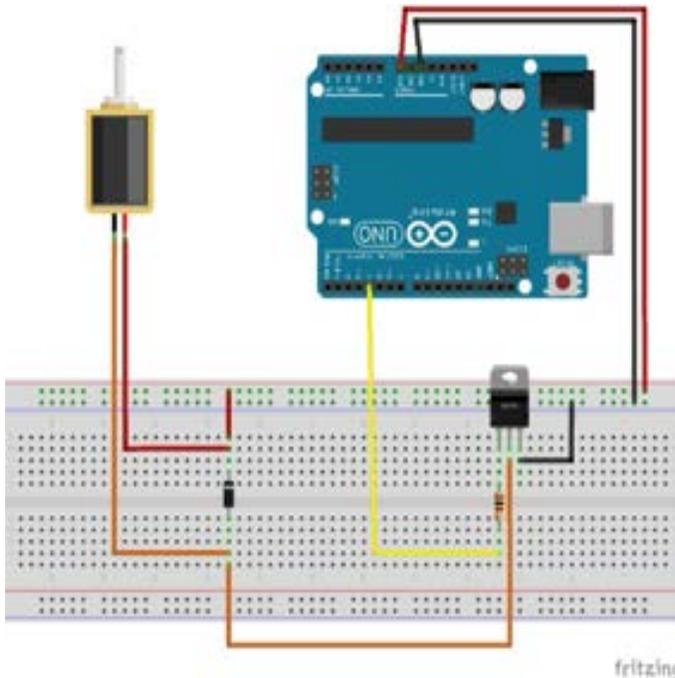
Content by: Drew Hardwick

Present: N/A

Goals: Research Possible circuits/code to control solenoid


Content:

- Method uses Arduino and Transistor, can be used on most solenoids/DC motors
 - Similar setup to last semester
- Parts:
 - 1 x Solenoid Valve
 - 1 x Arduino Uno or compatible microcontroller
 - 1 x Solderless Breadboard
 - 1 x TIP120 Darlington Transistor
 - 1 x 1K Ohm Resistor
 - 1 x 1N4001 Diode
 - Hookup Wires - We recommend Premium Male/Male Jumper Wire
- All Parts in Electronics kit, or available from Amit?




-
- The solenoid works with anywhere between 6-12V which is too high to use with the standard Arduino 5V. To get around this problem we will be using a 9V power supply – the solenoid will operate at 9V while the Arduino's built in voltage regulator will turn that 9V into the 5V that it needs to operate. To gain access to the raw voltage going into the DC barrel jack on the Arduino Uno we will use the “Vin” pin located next to the ground pin on the Arduino
- Connect the solenoid to the breadboard – we will need to add a diode between the two contacts so we will leave some space for that.
- Since a solenoid is an inductive load we need to include a snubber diode across the contacts.
 - Snubber diodes help eliminate transient voltages caused when a magnetic coil (such as those found in a motor, relay, or solenoid) suddenly loses power. Without this diode in place the transient voltage spikes can damage other elements of the circuit
 - The snubber is placed from the negative side of the coil to the positive side. Since diodes only allow current to flow in one direction we need to make sure we get this right, otherwise it will be a dead short between power and ground

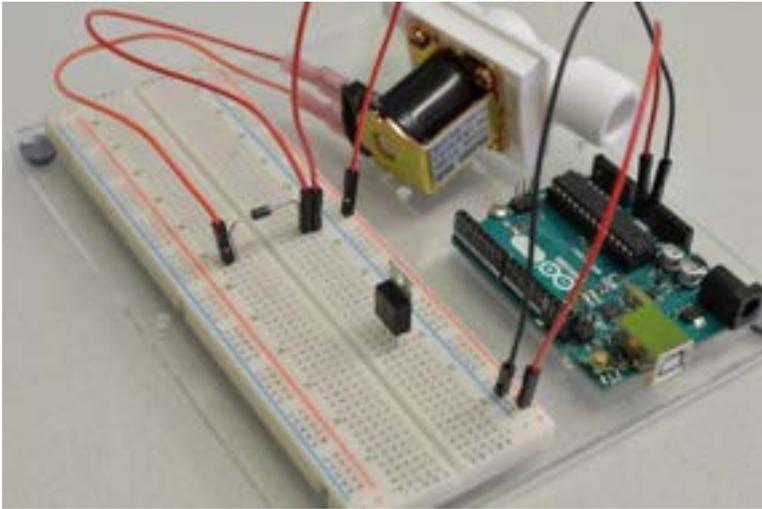- The solenoid gets constant power because we will be using low side switching to turn on and off this solenoid. Low side switching means we will be interrupting the circuit between the negative side of the solenoid and the ground rather than between the power and the solenoid
- The current draw of this solenoid is higher than a standard transistor can handle so we will be using a TIP120 Darlington Transistor. A Darlington transistor is actually a pair of transistors that act as a single transistor with a high current gain.
- Current setup:



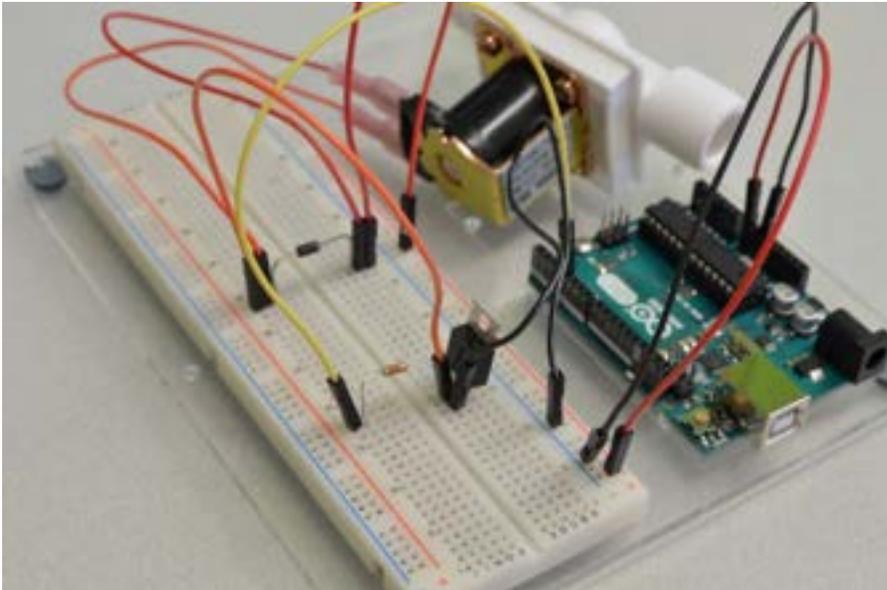- A base resistor is exactly what it sounds like – it is a resistor placed on the base pin of the transistor. This resistor limits the current going to the base (control line) of the transistor; no resistor would result in no current limit, and could result in a transistor blowing up! We will be using a 1K ohm resistor
- Connect to solenoid, arduino and ground
- Final setup:



- Arduino code shouldn't be very difficult/extensive
- Modify this to meet our demands:

```
1  int solenoidPin = 4; //This is the output pin on the Arduino we are using
2
3  void setup() {
4  // put your setup code here, to run once:
5  pinMode(solenoidPin, OUTPUT); //Sets the pin as an output
6  }
7
8  void loop() {
9  // put your main code here, to run repeatedly:
10 digitalWrite(solenoidPin, HIGH); //Switch Solenoid ON
11 delay(1000); //Wait 1 Second
12 digitalWrite(solenoidPin, LOW); //Switch Solenoid OFF
13 delay(1000); //Wait 1 Second
14 }
```

Conclusions/action items:

- Check what Katie was thinking and see if this setup would work. Speak with Amit for help.

References:

<https://learn.sparkfun.com/tutorials/transistors/applications-i-switches>

- "Controlling A Solenoid Valve With Arduino," *BC Robotics*. <https://bc-robotics.com/tutorials/controlling-a-solenoid-valve-with-arduino/> (accessed Sep. 28, 2022).



9/29/22 - Materials Check

Drew Hardwick - Sep 30, 2022, 8:24 AM CDT

Title: First Materials Check in

Date: 9/29/22

Content by: Drew Hardwick

Present: N/A

Goals: Check on our materials

Content:

- Pucc put our first materials order in our locker
- Anti-condensation bottle is HUGE - should last us all this and next semester
- Glass looks good, and solenoid is small and compact like we wanted
- He played with solenoid valve and tubing first:
 - He has 1/4" NPT fittings that adapt to the white tubing in the lab nicely (that would also connect to the regulator nicely), however, they did not fit.



After looking closer at the description, it says G1/4 which is a British standard pipe (metric) fitting standard that I do not have and the TEAMLab probably does not have either. Looking for G1/4 fittings like the one above that adapt to 1/4" tube is next step

- Sam found this adaptor on amazon for \$10:



-
- https://www.amazon.com/outstanding-Fitting-Connector-Barb-Fitting-Accessory/dp/B08LMMJG1S/ref=sr_1_3?keywords=g+1%2F4+to+1%2F4+barb&qid=1664467167&qu=eyJxc2MiOiwljg4liwicXNhjoiMC42NSIsInFzcCl6ljAuMDAifQ%3D%3D&sr=8-3
- Slide plastic tube on CO2 tank over barb and screw adaptor into valve
- Just need to make sure plastic will fit over
- Plastic in lab measurements:
 - 4.5mm inner diameter, 12.5mm outer diameter
- Thread Size: G1/4"; Barb OD Size: 6mm / 1/4"; Applicable Hose Diameter: 4.5-5mm/0.17-.0.20Inch; What you get: 4 x G1/4" Barb Fitting.
- This should fit, after looking at the tube, my only concern is that it will be difficult to pull the tube over the barbs since it is pretty thick and it is on the smaller side of the recommended hose diameter
- On the flip side, this will create a tight seal like we want if it works
- I reached out to Pucc and he ordered this adaptor, so we should test CO2 next week when it comes in

Conclusions/action items:

- Set up CO2 circuit and test regulation next week with Katie!!!!



11/3/22 - Linking 2 Arduinos to Communicate with one another

Drew Hardwick - Nov 03, 2022, 8:00 PM CDT

Title: Researching Ways to Link 2 Arduinos Together to Communicate

Date: 11/3/22

Content by: Drew Hardwick

Present: Katie

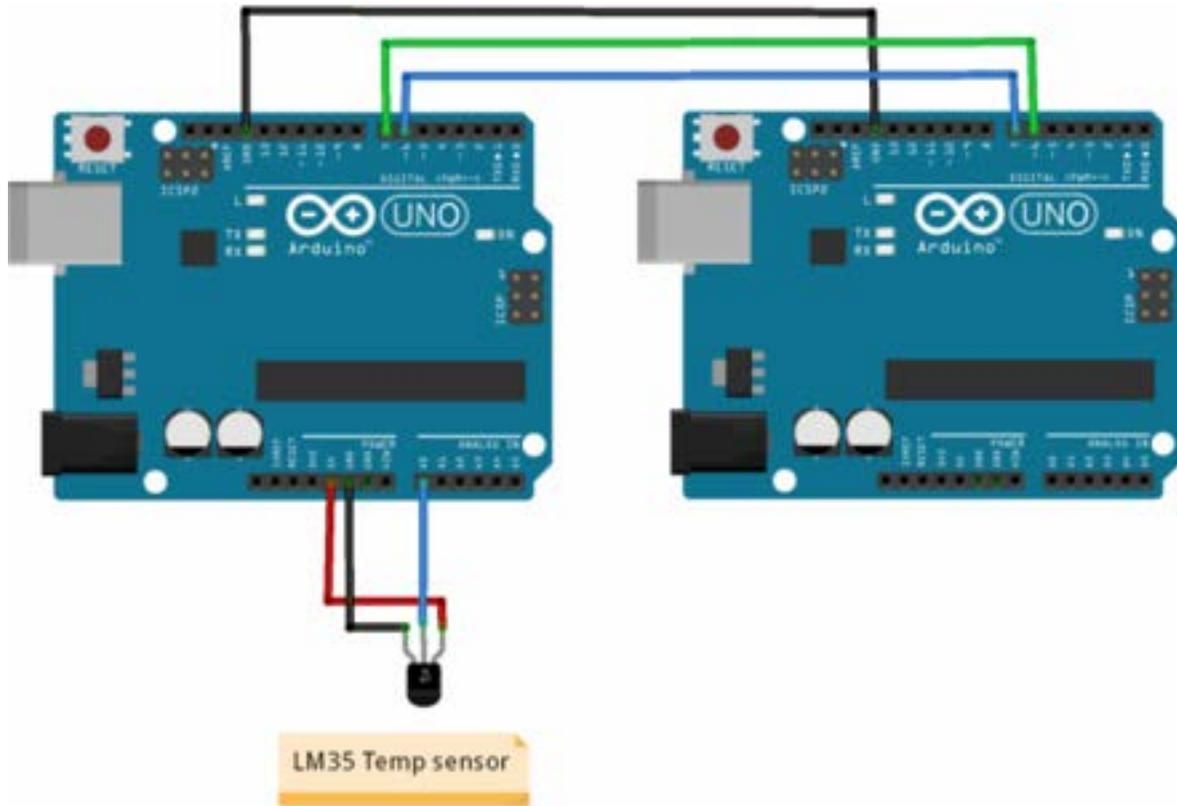
Goals: Research how we could possibly split our Solenoid/Relay and our NDIR onto different arduinos, but still communicate

Content:

- If you want use two Arduino, you can use a simple I/O port to communicate.
- The point of question is the Ground. When you connect two Arduino with each other, you have to connect their ground. In this tutorial when the Arduino UNO number 1 lights ON the onboard LED, the Arduino UNO number 2 connects to the computer, prints HIGH on the serial port and switches ON the onboard LED.

The result is two Arduino UNO that blink together.

- https://www.youtube.com/watch?v=E-9_5vwxGUk
- This youtube video seemed very promising but did not help us
- Katie and I tried exactly like they said, and inserted an "int val" from the sensor into our code like they did in the video, but we still could not get any communication between sensor and solenoid
- We were skeptical one wasn't working, but we unplugged and ran both devices on 2 arduinos and 2 computers, so that each of us ran 1 component
 - We then used this seperate setup to turn on the solenoid, blowing CO2, and held it up to our NDIR sensor
 - This sensor accurately read that CO2 was being blown into it, so we were able to debunk the thought that maybe our sensor was faulty
 - It is definitely something to do with our code and voltage supply/linking of our 2 board
- We tried to connect them like this(another article told us):



-
- This did not work either
- Dr. Nimunkar recommended looking into the Master/Slave approach, so we will look into that for next session, and hopefully get his help

Conclusions/action items:

- Keep fiddling/researching
- Try I2C Master/Slave



11/3/22 - I2C Arduino Communication

Drew Hardwick - Nov 03, 2022, 7:52 PM CDT

Title: I2C Arduino Communication

Date: 11/3/22

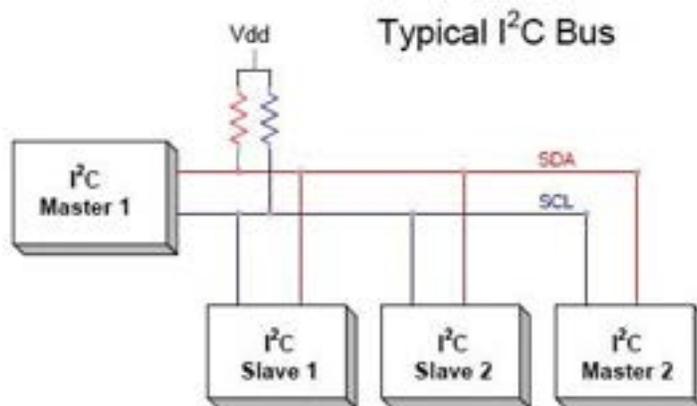
Content by: Drew Hardwick

Present: N/A


Goals: Figure out how to link 2 separate arduino boards to communicate

Content:

- I2C is a synchronous communication protocol meaning, both the devices that are sharing the information must share a common clock signal.
- It has only two wires to share information out of which one is used for the clock signal and the other is used for sending and receiving data.
- two wires will be connected across two devices.
- Here one device is called a **master** and the other device is called as **slave**.
- Communication should and will always occur between two a **Master and a Slave**.
- The advantage of I2C communication is that more than one slave can be connected to a Master.



- The complete communication takes place through these two wires namely, Serial Clock (SCL) and Serial Data (SDA).
 - **Serial Clock (SCL):** Shares the clock signal generated by the master with the slave
 - **Serial Data (SDA):** Sends the data to and from between the Master and slave.
- The **voltage levels of I2C are not predefined**. I2C communication is flexible, means the device which is powered by 5v volt, can use 5v for I2C and the 3.3v devices can use 3v for I2C communication. But what if two devices which are running on different voltages, need to communicate using I2C? A **5v I2C bus can't be connected with 3.3V device**. In this case voltage shifters are used to match the voltage levels between two I2C buses.
- I2C communication is used only for **short distance communication**.
 - It is certainly reliable to an extent since it has a synchronised clock pulse to make it smart.
 - This protocol is mainly used to communicate with sensor or other devices which has to send information to a master.
 - It is very handy when a microcontroller has to communicate with many other slave modules using a minimum of only wires.

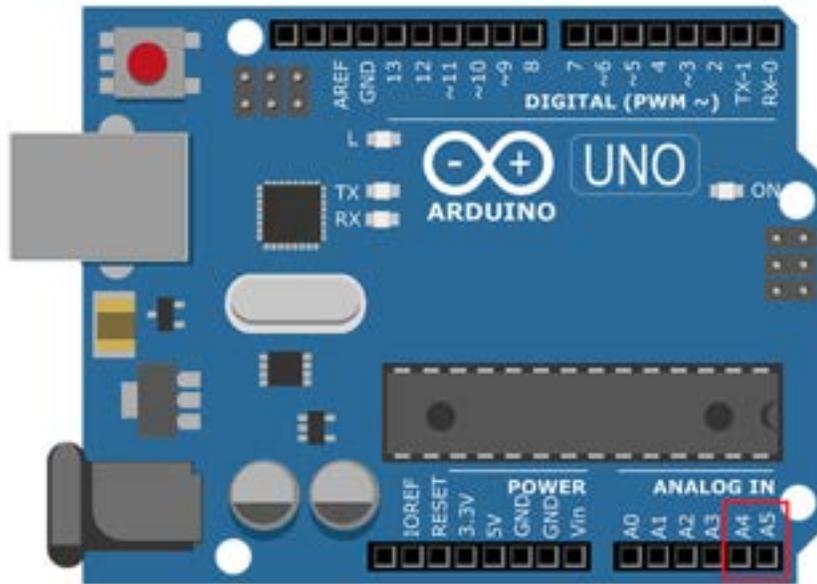

-
- **1. `Wire.begin(address)`:**

Use: This library is used for making communication with I2C devices. This Initiate the Wire library and join the I2C bus as a master or slave.

Address: The 7-bit slave address is optional and if the address is not specified, it joins the bus as a master like this [`Wire.begin()`].

- **2. `Wire.read()`:**

Use: This function is used to read a byte that was received from master or slave device, either that was transmitted from a slave device to a master device after a call to `requestFrom()` or was transmitted from a master to a slave.

- **3. `Wire.write()`:**

Use: This function is used to write data to a slave or master device.

Slave to Master: Slave writes data to a master when `Wire.RequestFrom()` is used in master.

Master to Slave: For transmission from a master to slave device `Wire.write()` is used in-between calls to `Wire.beginTransmission()` and `Wire.endTransmission()`.

`Wire.write()` can be written as:

- `Wire.write(value)`
- value: a value to send as a single byte.
- `Wire.write(string)` :
- string: a string to send as a series of bytes.
- `Wire.write(data, length)`:
- data: an array of data to send as bytes

length: the number of bytes to transmit.

- **4. `Wire.beginTransmission(address)`:**

Use: This function is used to begin a transmission to the I2C device with the given slave address. Subsequently, build queue of bytes for transmission with the `write()` function and then transmit them by calling `endTransmission()` function. 7-bit address of the device is transmitted.

- **5. `Wire.endTransmission()`:**

Use: This function is used to end a transmission to a slave device that was begun by `beginTransmission()` and transmits the bytes that were queued by `Wire.write()`.

6. Wire.onRequest();

Use: This function gets called when a master requests data using *Wire.requestFrom()* from the slave device. Here we can include *Wire.write()* function to send data to the master.

7. Wire.onReceive();

Use: This function gets called when a slave device receives a data from a master. Here we can include *Wire.read();* function to read the data sent from master.

8. Wire.requestFrom(address,quantity);

Use: This function is used in the master to request bytes from a slave device. The function *Wire.read()* is used to read the data sent from the slave device.

address: the 7-bit address of the device to request bytes from

quantity: the number of bytes to request

Conclusions/action items:

- I need to find Dr. Nimunkar for some help on how to populate this system with our own custom code, but this looks like exactly what we should be looking for

References:

- <https://circuitdigest.com/microcontroller-projects/arduino-i2c-tutorial-communication-between-two-arduino>
-



11/9/22 - Window Wiper Sketch Idea

Drew Hardwick - Nov 10, 2022, 3:20 PM CST

Title: Window Wiper Sketch Idea

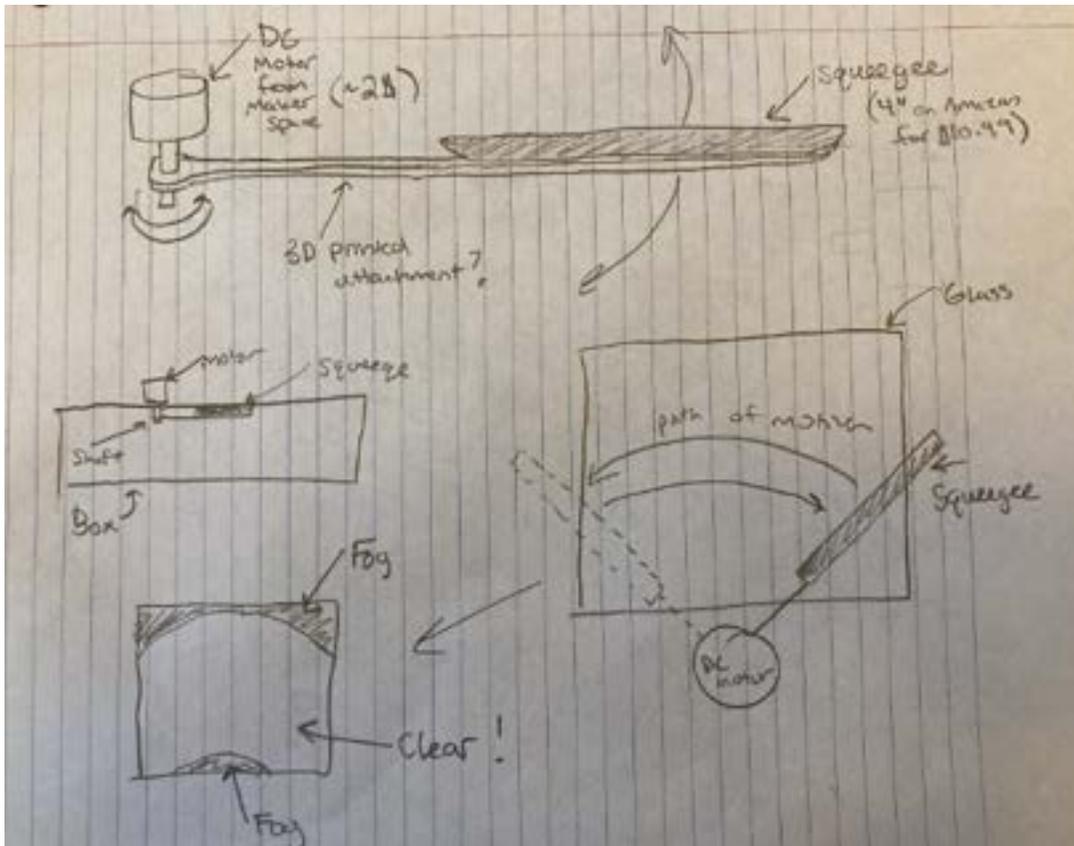
Date: 11/9/22

Content by: Drew Hardwick

Present: N/A

Goals: Sketch out idea for "Window Wiper" Condensation Prevention System

Content:



Conclusions/action items:

Speak to team about design and potentially order parts



10/3/22 - Circuit Design

Title: Solenoid Circuit/Code Design

Date: 10/3/22

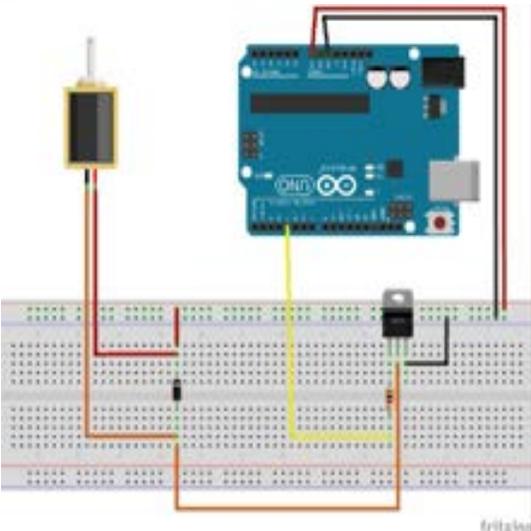
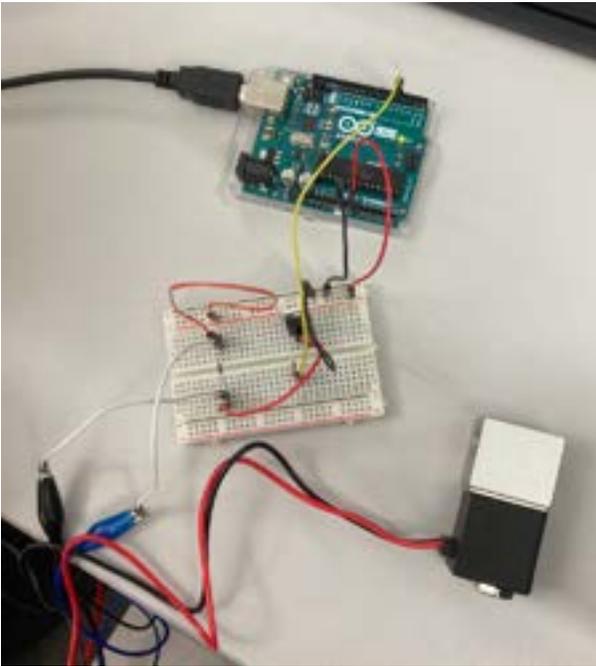
Content by: Drew Hardwick

Present: Katie Day

Goals: Set up and Test the Solenoid Circuit/Code

Content:

- Katie and I met to set up our circuitry and write our code using our BME 201/310 electronics kits, and the website that we both found detailing simple and easy solenoid control via Ardu
- We also were able to find Dr. Nimunkar and he gave us access to the 301 supply closet for the Transistor and Diode that we required to set up this circuit.
- The diode worked well (we think) but the Transistor needed a larger voltage capacity to handle the 9V necessary to operate this solenoid valve
- The team will have to purchase the TIP120 Transistor (link below) to combat this issue. It is cheap, and it is the recommended Transistor from the DIY instructions
 - https://www.digikey.com/en/products/detail/nte-electronics,-inc/TIP120/11655270?utm_adgroup=Discrete%20Semiconductor%20Products&utm_source=google&utm_medium=cpc&utm_campaign=Shopping_DK%2BSupplier_NTE%20Electronics&utm_term=&NoQMjD8RmT5YQKKf2Aplqqt44pZ_tBpg4XXP0z2lCM5caAhU6EALw_wcB
 - Already sent purchasing request to Puccinelli
- The Current setup is pictured below:



Conclusions/action items:

- Get Transistor from Puccinelli and Test ASAP.

Comments

Amit Nimunkar

Dec 10, 2022, 2:18 PM CST

Please provide a schematics for the circuit to be implemented.



10/20/22 - Relay Schematic

Drew Hardwick - Dec 13, 2022, 7:46 AM CST

Title: Relay Schematic

Date: 10/20/22

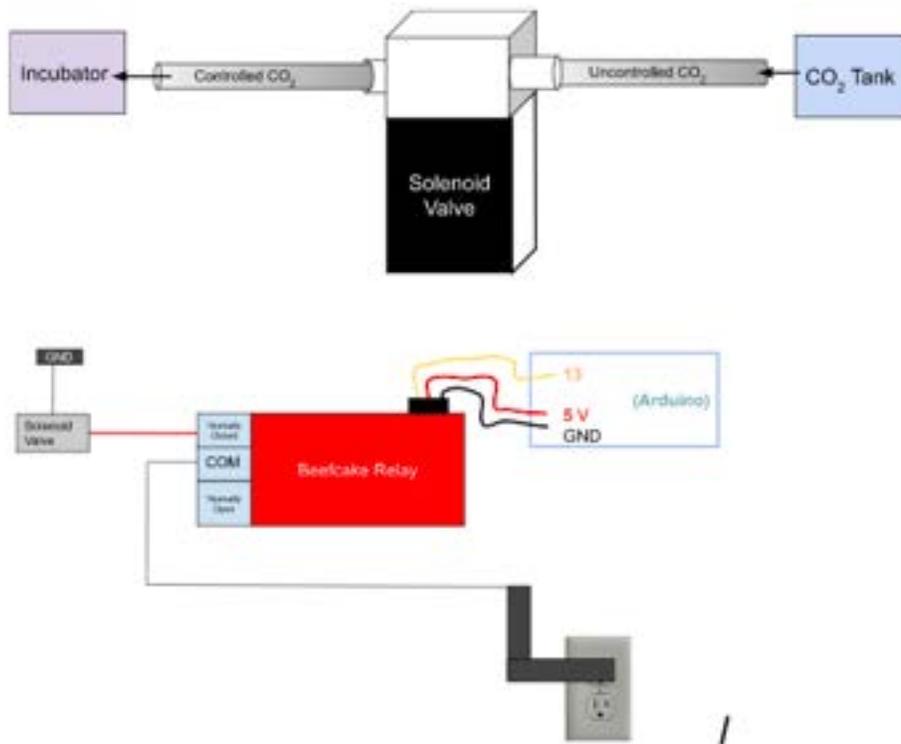
Content by: Drew Hardwick

Present: N/A

Goals: Show Relay Setup for Solenoid Control

Content:

- Below are the schematics/block diagrams used to control the Solenoid valve using outlet power and a Beefcake Relay





Conclusions/action items:

- Link to NDIR Sensing code to properly adapt incubator CO₂ internal environment
- Research I2C Code

References:

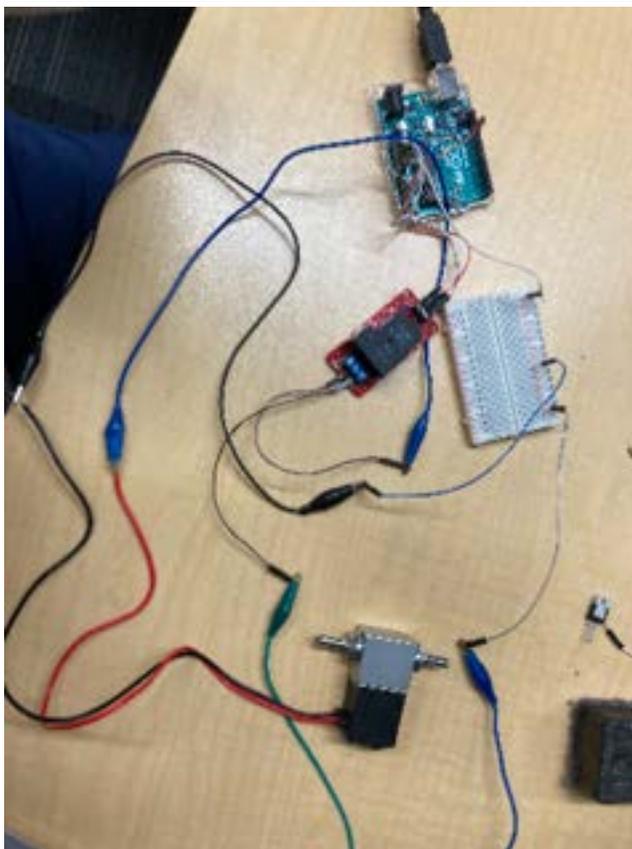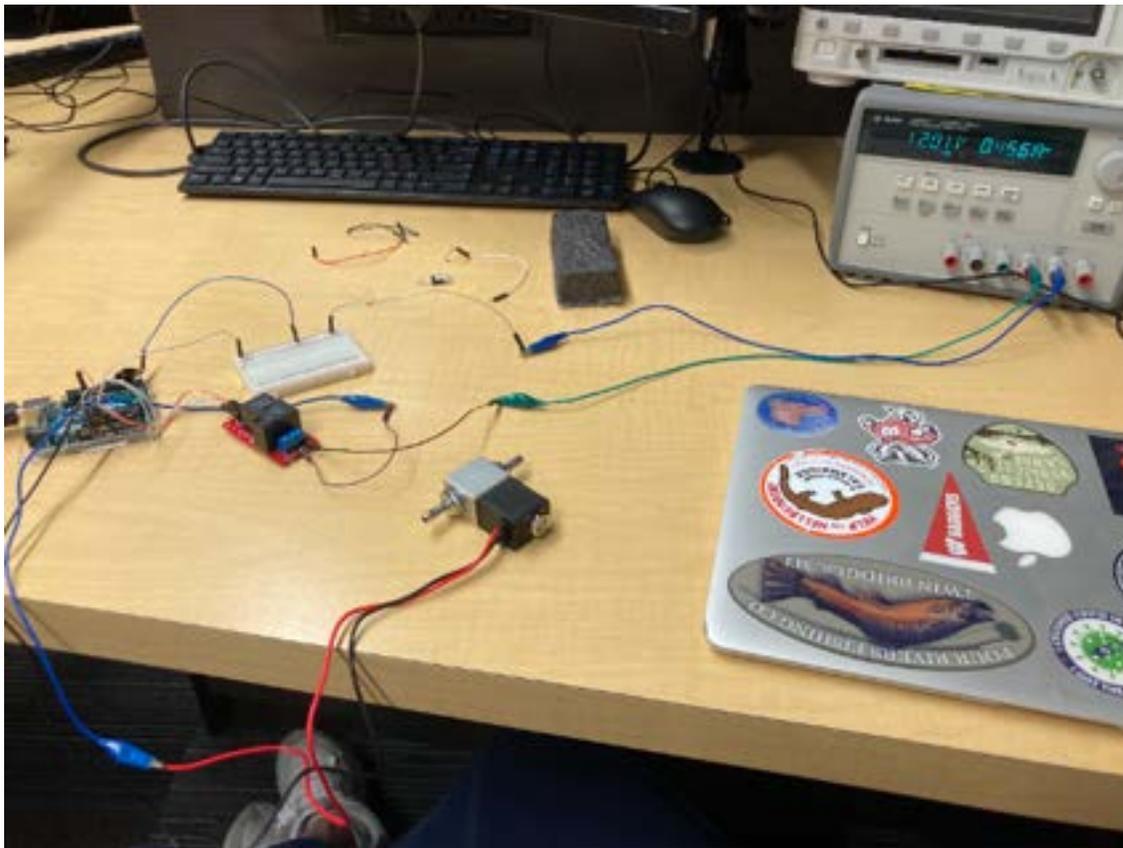- <https://www.sparkfun.com/products/13815>



-
- Then Katie and I turned our attention towards adapting our circuit to function with power from a wall outlet
 - It is not feasible to be near a DC voltage supply anytime we want to incubate
- We again spoke with Dr. Nimunkar, and he directed us towards the supply room where we sorted through buckets and tangles for a wall adaptor with proper voltage and current values.
- We finally found one, cut and stripped the wires and attached it to our circuit and it ALSO WORKED
- Our setup is below:



-
- We should be ready for full incubator CO2 testing now!

Conclusions/action items:

- Test CO2 in full incubator next week

References:

□ "Beefcake Relay Control Hookup Guide - SparkFun Learn." <https://learn.sparkfun.com/tutorials/beefcake-relay-control-hookup-guide/example-arduino-control> (accessed Oct. 20, 2022).



10/26/22 Solenoid CO2 Sensor Coding and Testing

Drew Hardwick - Nov 03, 2022, 7:43 PM CDT

Title: Solenoid CO2 Sensor Coding and Testing

Date: 10/26/22

Content by: Drew Hardwick

Present: Katie, Sam

Goals: See if Solenoid Can effectively regulate CO2 input and code a feedback mechanism

Content:

- Katie and I spent this session testing our solenoid code to link the NDIR sensor to our Solenoid valve
- Sam thought it best to write our code based on our flow-rate calculations that we tested, so that we use the flow-rate to keep the valve open for a specific amount of time depending on how much CO2 is needed in the system to always keep the environment right at 5%

- The flow rate we tested and got was: 335mL/sec

- Here is the code we wrote for that:

- `NDIR_SoftwareSerial mySensor(2, 3);`
`double percent = mySensor.ppm/10000;`
`int solenoidPin = 4; //output pin`
`int relayPin = 13;`
`double value = (50000-mySensor.ppm)/100; // difference in percent`
`double totVol = 1759.55;`
`double FR = 335.0;`
`double openTime;`

```
void setup() {
  Serial.begin(9600);

  if (mySensor.begin()) {
    Serial.println("Wait 10 seconds for sensor initialization...");
    delay(10000);
  } else {
    Serial.println("ERROR: Failed to connect to the sensor.");
    while(1);
  }
  pinMode(solenoidPin,OUTPUT); //sets valve as output
  pinMode(relayPin, OUTPUT);

}
```

```
void loop() {
  //Concentration
  if (mySensor.measure()) {
    Serial.println((mySensor.ppm/10000));
    delay(1000);
    //communicate with solenoid
    if (mySensor.ppm < 50001){
      openTime = totVol * value / FR;
      digitalWrite(relayPin, HIGH);
      digitalWrite(solenoidPin,HIGH); //switch Solenoid ON
      delay(openTime);
    }else{
      digitalWrite(relayPin, LOW); //switch relay off
      digitalWrite(solenoidPin, LOW); //switch solenoid off
    }
  }
}
```

```

    delay(5000);
  } else {
    Serial.println("Sensor communication error.");
  }
  delay(1000);
}

```

- However, after speaking to each other and to Dr. Nimunkar, Katie and I thought that this code seemed too complicated, and difficult since we would be dealing with the valve constantly opening and closing for milliseconds at a time
 - We calculated (using our flow-rate) that for the box to go from 0% CO2 to 5%, the valve only needs to be open .26 seconds.
 - This means that to go from 4.5% or 4% to 5%, the valve would only open for a tenth or less of a second, and we don't think it is realistic to keep opening and closing our valve constantly like that.
- Thus, Katie and I decided to write a second code that converted our ppm from the NDIR sensor into a percent. volume CO2
- When this value drops below 4.5%, the valve will open until it reaches 5.5%, and then close
- This always ensures we keep our CO2 input at 5% +/- 0.5%
- The Code we wrote is below:

```

◦ NDIR_SoftwareSerial mySensor(2, 3);
double percent = mySensor.ppm/10000;
int solenoidPin = 4; //output pin
int relayPin = 13;
double totVol = 1759.55;
double FR = 335.0;

```

```

void setup() {
  Serial.begin(9600);
  if (mySensor.begin()) {
    Serial.println("Wait 10 seconds for sensor initialization...");
    delay(10000);
  } else {
    Serial.println("ERROR: Failed to connect to the sensor.");
    while(1);
  }
  pinMode(solenoidPin,OUTPUT); //sets valve as output
  pinMode(relayPin, OUTPUT); //sets relay as output
}

```

```

void loop() {
  if (mySensor.measure()) {
    Serial.println((mySensor.ppm/10000));
  }else {
    Serial.println("Sensor communication error.");
  }
  if (percent < 5){
    digitalWrite(relayPin, HIGH);
    digitalWrite(solenoidPin, HIGH);
    delay(1000);
  }else{
    digitalWrite(relayPin, LOW);
    digitalWrite(solenoidPin, LOW);
    delay(1000);
  }
  delay(1000);
}

```

- We tested this code, and found that it works separately (so does the sensor code) but the two cannot communicate when we hook them up together on the same arduino board
- Do we need to link 2 arduinos together?? Ask Dr. Nimunkar at weekly meeting for help

Conclusions/action items:

- Ask Dr. Nimunkar why our system will not communicate



11/10/22 - CO2 Feedback Testing

Drew Hardwick - Nov 10, 2022, 3:04 PM CST

Title: CO2 Regulation Feedback Testing

Date: 11/10/22

Content by: Drew

Present: Drew and Katie

Goals: Figure out how to link our Solenoid and NDIR Sensor and get them to talk

Content:



- We have been running into issues getting our solenoid to communicate with our NDIR sensor
- We had previously separated them on to different arduinos but they still would not communicate and we got very confused trying I2C and making 1 controller a master and 1 controller a slave
- Today, we tried a different approach of running the solenoid and the sensor from both different microcontrollers and from different computers with 2 separate arduino codes.
- It worked.... kinda
- The sensors were able to communicate, but it was inputting far too much CO2, to the point that it was saturating our sensor at 10% max
- Clearly our code was not working how we wanted it too
- To combat this, we have changed the code to use the flow-rate so that it inputs roughly 1% CO2 every minute and gradually climbs up to 5%
- The issue with this that it keeps constantly climbing AFTER it hits 5% as well
- We have tried to edit the code with a counter shown below, but testing this will take a significant chunk of time, so we have not ran it yet, we will test further next week
- Overall we are happy with the breakthrough in this session :)))

```
#include <SoftwareSerial.h>
```

```
int solenoidPin = 4; //Output pin
int relayPin = 13;
int NDIR = 2;
int val;
int x;

void setup() {
  pinMode(solenoidPin, OUTPUT); //sets the pin as an output
  pinMode(relayPin, OUTPUT);
  // pinMode(NDIR, INPUT); //sets the Sensor value as an
}

void loop() {
  //val = digitalRead(NDIR); //reads the values from the NDIR
  //if (val == 1 ){
  //digitalWrite(relayPin, HIGH); //switch relay on
  //digitalWrite(solenoidPin,HIGH); //Switch Solenoid ON
  //delay(100); //wait 5 milisecond
  //}if (val==0){
  //digitalWrite(relayPin, LOW); //switch relay off
  //delay(100);
  //}
  //delay(1000);
  for (int counter = 0; counter <= 300; counter = counter +1){
    digitalWrite(relayPin, HIGH); //switch relay on
    digitalWrite(solenoidPin, HIGH); //switch solenoid on
    delay(50);
    digitalWrite(relayPin, LOW); //switch relay off
    digitalWrite(solenoidPin, LOW); //switch solenoid off
    delay(72000); // wait 1.2 minutes
  }
  delay(300000);
}
```

Conclusions/action items:

- Test New Code Next week



11/15/22 & 11/21/22 - Wiper Fabrication

Drew Hardwick - Nov 22, 2022, 8:28 AM CST

Title: Wiper Fabrication for Condensation Buildup

Date: 11/15/22 & 11/21/22

Content by: Drew and Sam

Present: Drew and Sam

Goals: Build a serviceable wiper device to clear condensation and allow for proper cell imaging

Content:

- Sam and I worked together these two days to create what we think is a serviceable wiper
- It may not be perfect, but it is a good short term fix that works well enough
- It can be improved upon next semester when we have more time, and that is something Sam and I will continue to tackle.
 - For this semester, this temporary design thrown together from just items from team lab and no purchasing will work!
- See the "**11/15/22 Wiper Fabrication**" Page under the **Fabrication** folder in the team notebook for images and specifics of our fabrication process

Conclusions/action items:

- This design is functionable short term fix
- Sam and I will make more capable design for next semester iteration of box.



11/30/22 - CO2 Testing with Hard Coded Solenoid

Drew Hardwick - Dec 07, 2022, 8:28 AM CST

Title: CO2 Testing with Hard Coded Solenoid

Date: 11/30/22

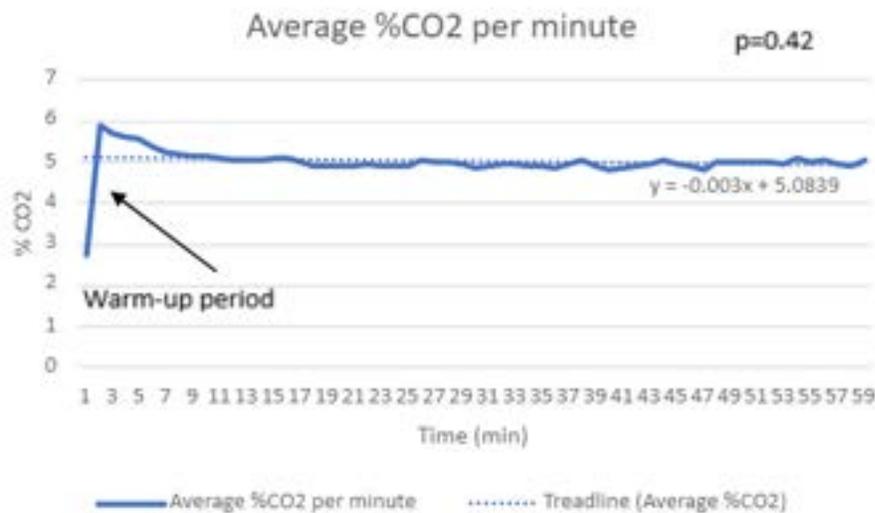
Content by: Drew Hardwick

Present: Drew Hardwick and Katie Day

Goals: Test our Hard Coded CO2 input code

Content:

- Katie and I met with Dr. Nimunkar attempting to learn I2C communication better, but we established that we do not have the time this semester to write our own I2C protocol
- Thus we determined that hard coding the system to be at roughly 5% CO2 was our best short term fix, and we should tackle I2C first thing next semester
- The Hard Code we used is attached to this page
- The Hard Coded Solenoid valve was tested for roughly 1 hour according to the CO2 Testing Protocol
- The results are shown below:



- We calculated a standard deviation of .28. and a t-test yielded a value of .42
- This is conclusive in shoeing the results are not statistically significant and therefore this system can be used in live-cell testing

Conclusions/action items:

- Write up findings in report/poster
- conduct live cell testing
- write I2C protocol next semester with Dr. Nimunkar's help

Drew Hardwick - Dec 07, 2022, 8:30 AM CST



[Download](#)

Hard-code_test.csv (73.5 kB)



[Download](#)

Custom_Data_-_2022-11-30_-_Recording_1.csv (7.91 kB)



12/5/22 - 12/6/22 Live Cell Testing

Drew Hardwick - Dec 13, 2022, 7:40 AM CST

Title: Live Cell Testing

Date: 12/5/22 - 12/6/22

Content by: Drew Hardwick

Present: Drew, Sam, Bella, Maya, Katie

Goals: Conduct live cell testing over a period of 36 hours

Content:

- We set up our entire incubator with temperature/humidity input and CO2 input on the microscope for the first time ever!
- We then got it heated up and started the CO2 regulation system
 - The CO2 proved a bit tricky, we had to connect to two computers
 - The Solenoid control was connected to the tank (which we had to move) and the lab computer where the images from the microscope would be captured
 - The NDIR sensor had to be run from Katie's Laptop so that we could capture the data we needed with the data-streamer function
 - Could not download onto lab computers because of administrator restrictions
 - We then had to play 48 hour youtube videos on both computers to ensure they did not go to "sleep" and stop running our arduino code - Code is detailed in CO2 testing file entry
- Live cells were then put into our incubator for the first time!
 - We were looking to establish a curve for cell growth/death to compare to our cell confluency testing control from earlier in the semester - protocol/results from that are attached to this page
- We imaged the cells every 12 hours by changing the cell media, and then taking off the incubator lid to take an image on the microscope according to Bella's cell imaging protocols attached to this page.
 - The CO2 system had to be restarted any time lid was taken off to image
-
- I helped set up the initial test 9am 12/5, and I also took cell images/restarted CO2 9am 12/6 and 9pm 12/6
- Adhered to Biosafety Standards 2.

Results:

- CO2 issues and incubator decay caused premature death of the cells
- See final poster/final exam for in depth data analysis of results

Conclusions/action items:

- Use I2C next semester in order to maintain the pH of the cells natural environment and refabricate incubator.

How to do a media change and image with

1. Turn the light and place all the things on top of the table
2. Put on a properly fitting pair of gloves
3. Turn on the UV light on one of the biosafety cabinets (check to see the light, do number 1-11 first)
4. Remove media from the Culture plate (Slide on the left in the attached image, media is in the corner of the flask shall labeled "DMEM with Micrograph")
5. Turn on the water bath and place the media inside



6. Turn off the UV light and turn on the gentle fan, and overhead lights (both 11 forward)
7. Lay the flask on the floor. Don't open the flask (open only the seal covers on the side through)
8. Remove the cell flask from the biosafety cabinet (with 70% ethanol) and place it inside the bath
9. Remove media from the water bath, do not let it leave (open with 70% ethanol) and place inside the flask
10. Do this in 20 sec of the bath
11. Remove the lid of the used container and add 1.5 glass (no more paper/foam) inside the bath
12. Place the large end of the pipette into the rubber vacuum tube, do not let the top of the pipette touch any surface (avoid to be visible)
13. Open the cell flask
14. Hold the flask so that the media is above the top corner that may provide an additional vacuum up the side
15. Place the top end of the pipette into the neck of the flask, it will vacuum up the media
16. Remove ALL media
17. Submerge the glass entomological pipette from inside the bath (under 1 cm of water)



[Download](#)

Cell Imaging Protocol.pdf (1.11 MB)

Cell Confluency Test Protocol

Introduction
 Name of Tester: **Brian Beckwith**
 Grade of Test Performance: **90/100 (4.5/5.0)**
 Site of Test Performance: **CCIB Teaching Lab**

Objectives
 The team will be employing image J software to quantify the percentage of area covered by the cells over time in order to quantify the control results. This will allow the team to compare cell proliferation in the untreated (control) to growth in the presence. The images of the cells will be taken using the video camera while testing on. The control will be the T25 flask that is cultured in the standard incubator in order to provide a baseline on appropriate cell death over the course of a week. Another T25 flask will be cultured inside the biosafety cabinet at the same time as the control over the course of a week. A portion of the flask will be exposed to vacuum that the media will be changed each day. Using the video camera in the biosafety cabinet, an image will be taken of the growth medium section. For the image will be added into image J. The team will be able to quantify the percent of cell coverage and track cell confluency over the course of the week. Tests will be conducted at weekly intervals to ensure significant difference between the confluency between the control and the presence.

Image	Protocol	Method/Instrumentation	Pass/Fail	Details of Testers
1	Day 0: Do a replicate seed into 100 µm flasks after cells in 100 µm flasks. Take pictures of the flask with image J and Image J software. Analyze it to get a count of the percent coverage in relation between the industry incubator and the biosafety cabinet. Do this for 1 week at a time.	Image J software	Pass	95
2	Day 1: Image section Analysis in image J and record if the percent coverage is similar between the industry incubator and the biosafety cabinet. Do this for the entire week (1 week at a time).	Image J software Image J manual (20 hours (2.00 hrs))	Pass	95
3	Day 2: Image section Analysis in image J and record if the percent coverage is similar between the industry incubator and the biosafety cabinet. Do this for the entire week (2 weeks at a time).	Image J software Image J manual (20 hours (2.00 hrs))	Pass	95

[Download](#)

Cell Confluency Test Protocol - Control Completed.pdf (79 kB)



12/12/22: Contributions

Bella Raykowski - Dec 12, 2022, 5:22 PM CST

Title: Project overview and how my work contributes to the project

Date: 12/12/22

Goal: Document how my work adds to the project

Content:

- the overall goal of the project was to design, fabricate, and test a low-cost stage top microscope incubator that can maintain cell viability for 1 week periods and not interfere with the microscope incubator
- this design will be competitive because it is a low-cost option compared to the multi-thousand options currently on the market
- I mainly contributed to the cell testing and optical testing aspects of the project
- I created the baseline for cell testing by running a 1-week test in the standard incubator while measuring cell confluency every 24 hours
- I then ran the same test in the prototype incubator to determine if the design could keep cells alive; it could not
- I tested optics on the glass slides to determine if the glass interfered with the optical quality of the microscope; it did not interfere with the optics
- I tested the efficacy of the anti-fog spray to determine if it could prevent the formation of condensation and maintain the pre-identified optics; it did not

Conclusion: I contributed overall to the testing of the prototype



2/10/22- A hot water supply as the source of Legionella pneumophila in incubators of a neonatology unit

Bella Raykowski - Mar 01, 2022, 8:13 PM CST

Title: A hot water supply as the source of Legionella pneumophila in incubators of a neonatology unit

Date: 2/10/22

Content by: Bella Raykowski

Goal: Understand how the water system could pose a contamination risk

Content:

- The humidification/water trays of 5 incubators were colonized with Legionella pneumophila, serogroup 1
- Legionella pneumophila is a thin, aerobic, pleomorphic, flagellated, non-spore-forming bacteria. L. pneumophila is the causative agent of Legionnaires' disease
- Bacteriological analysis of the water in the humidification trays showed very large numbers of heterotrophic bacteria
- Two hot water systems supply the unit, either of which is used to add water to the humidification trays:
 - (A) is maintained at about 60 °C
 - (B) is maintained at 45 °C.
- B was found to be colonized with L. pneumophila. Monoclonal antibody (Mab) subgrouping indicated it was the source of colonization of the humidification trays of the incubators.

Conclusion: We may need to test to make sure that our water system stays sterilized as to not pose a risk to the cell culture

Citation: A. Veríssimo, G. Vesey, G.M. Rocha, G. Marrão, J. Colbourne, P.J. Dennis, M.S. da Costa, A hot water supply as the source of Legionella pneumophila in incubators of a neonatology unit, Journal of Hospital Infection, Volume 15, Issue 3, 1990, Pages 255-263, ISSN 0195-6701, [https://doi.org/10.1016/0195-6701\(90\)90033-K](https://doi.org/10.1016/0195-6701(90)90033-K).



2/14/22- The Thermal Conductivity of Common Tubing Materials Applied in a Solar Water Heater Collector

Bella Raykowski - Mar 01, 2022, 9:10 PM CST

Title: The Thermal Conductivity of Common Tubing Materials Applied in a Solar Water Heater Collector

Date: 2/14/22

Content by: Bella Raykowski

Goal: Understand how the conductivity of copper wiring works

Content:

- Thermal conductivity is the amount of energy required to increase the temperature of the liquid inside the tubing to the same temperature on the exterior of the tubing (the rate at which heat is transferred through a material)
- Different materials have different thermal conductivity rates, and this is based upon the molecular structure
- Transfer rate is also influenced by the thickness of the material

Piping	Material	W/mK
Steel	Carbon Steel	54
Copper	Copper	401
PEX	Cross-linked High-density Polyethylene	0.51
CPVC	Chlorinated Polyvinyl Chloride	0.14
PE	Polyethylene	0.38
PVC	Polyvinyl Chloride	0.19

- The table from the article above shows a ranking of common materials used in thermal conductivity
- Fourier's law examines the transfer of heat through a solid material.

$$q = k A dT / s$$

q = heat transferred per unit time (W, Btu/hr)

A = heat transfer area (m² , ft²)

k = thermal conductivity of the material

dT = temperature difference across the material

s = material thickness (m, ft)

Conclusion: We can use Fourier's law to find the heat transferred per unit of time for our copper wire. This article also solidifies the idea that we should use copper wire.

Citation:

Patterson, John E., and Ronald J. Miers. "The thermal conductivity of common tubing materials applied in a solar water heater collector." 46th ASC Annual International Conference, Wentworth Institute of Technology, ed T. Sulbaran (Boston, MA). 2010.



2/22/22- Advantages of laser machine cutting acrylic

Bella Raykowski - Mar 01, 2022, 10:20 PM CST

Title: Advantages of laser machine cutting acrylic

Date: 2/22/22

Content by: Bella Raykowski

Goal: Understand the pros and cons of acrylic for our box design

Content:

- Advantages: fast speed, high accuracy, and accurate positioning
- Factors that limit cutting speed: thickness, the thermal expansion coefficient of materials, the output power of the laser
- The process outlined in this article allows for smooth and neat edges with no need for any subsequent cleaning and polishing. The laser principle is the high strength, natural tempering edge, then there are no cracks.

Conclusion: Laser cutting acrylic is looking like the best option for this project due to the accuracy, cost, and the fact that it doesn't crack easily, which was a problem with last year's design.

Citation: "Advantages of Laser Machine Cutting Acrylic (Organic Glass)-Arthas." XTLASER, 26 July 2017, [https://www.xtlaser.com/advantages-laser-machine-cutting-acrylic-organic-glass/#:~:text=Cutting%20acrylic%20\(organic%20glass\)%20with,it%20has%20an%20irreplaceable%20role.](https://www.xtlaser.com/advantages-laser-machine-cutting-acrylic-organic-glass/#:~:text=Cutting%20acrylic%20(organic%20glass)%20with,it%20has%20an%20irreplaceable%20role.)

Bella Raykowski - Mar 01, 2022, 10:18 PM CST



[Download](#)

Advantages_of_laser_machine_cutting_acrylic_organic_glass_-Arthas_XTLASER.pdf (265 kB)



3/1/22- Why is CO2 Used in the Incubation Industry?

Bella Raykowski - Mar 01, 2022, 11:30 PM CST

Title: Why is CO2 Used in the Incubation Industry?

Date: 3/1/22

Content by: Bella Raykowski

Goal: Understand why we need CO2 in the incubator

Content:

- Carbon dioxide is used in incubators to maintain the pH in the cell cultures. (how though?)
- Combined with maintaining a consistent temperature and humidity levels, the CO2 is usually kept between 3-7%.
- To ensure accuracy and to ensure extremely tight tolerances and specifications, occasional or constant checks of readings are a key for quality and tolerance controls.
- A common CO2 monitor is the Incubator IR CO2 Sensor.
- The (MH-100) Incubator IR CO2 Sensor is specifically designed to monitor and detect carbon dioxide levels in cell incubators to manage ideal cell and tissue growth.
- The CO2 sensor may be placed directly in the incubation chamber to allow accurate readings

Conclusion: We need the CO2 in order to maintain the proper pH and although we already have a sensor we could also try using one of the sensors listed above.

Citation: CO2Meter, Sponsored Content by. "Why Is CO2 Used in the Incubation Industry?" News, 19 Oct. 2020, <https://www.news-medical.net/whitepaper/20200117/Why-is-CO2-Used-in-the-Incubation-Industry.aspx>.



[Download](#)

Why_is_CO2_Used_in_the_Incubation_Industry_.pdf (920 kB)



5/3/2022- Cell Viability Staining

Bella Raykowski - May 03, 2022, 3:30 PM CDT

Title: Cell Viability Staining

Date: 5/3/2022

Content by: Bella

Goals: To research what types of stains/dyes can be used in viability staining

Content:

Hoechst:

- is a blue fluorescent stain for the DNA and nuclei of cells
- can be used in fixed and live-cell imaging (we would start with daily live-cell imaging)
- emits between 460-490 nm (blue range)
- it binds into the groove of DNA and is brighter for dead cells than live cells
- store at 4 degrees C and protect it from light (it will become bleached over time if has prolonged exposure to light)
- price: \$112.00 for 5 mL (yikes)

Calcein AM:

- a cell-permeant dye that can determine cell viability in eukaryotic cells (will need to check what types of cells we are using)
- is a green fluorescent stain for live cells
- emits between 488-520 nm (green range)
- store at -5 to -30 degrees C
- price: \$317.00 for 1 mg (that's a lot of money)

Propidium Iodide:

- is a red nuclear and chromosome counterstain that is not permeant to live cells and therefore is used to stain dead cells
- PI binds to the DNA through intercalating between the bases
- emits between 535-617 nm (red range)
- store at room temperature and protect it from light (photobleaching)
- price: \$166.00 for 100 mg

Conclusions/action items:

Citations: These stains will theoretically work for testing the viability of our prototype but will need to check with Dr. P to determine what cells we will be using. Will also need to ask him if these would be included in the budget or if he already has some that we can borrow. If not I can ask my PI if I can use some of our aliquotes since we already have these stains.

<https://www.thermofisher.com/order/catalog/product/62249>

<https://www.thermofisher.com/order/catalog/product/C1430>

<https://www.thermofisher.com/order/catalog/product/P1304MP>



5/3/2022- Biosafety level 2 standards

Bella Raykowski - May 03, 2022, 9:58 PM CDT

Title: Biosafety Level 2 Standards

Date: 5/3/2022

Content by: Bella

Goals: Understand what the biosafety level 2 requirements are in order to ensure that our design meets them

Content:

- BSL2 labs work with infectious agents, toxins, and cells therefore the guidelines must mediate the risk of exposures
- these labs must have handwashing sinks, eye washing stations, doors that lock, the ability to decontaminate lab waste, and an autoclave
- people just wear PPE such as lab coats, gloves, eye protection, and face shields
- incubators must maintain a temperature of 37 degrees C, 95% humidity, and 5% CO₂ in order to provide an adequate microenvironment for cells
- many types of incubators have special features like decontamination programs, locking mechanisms, alarms, digital displays, and transparent doors
- our incubator will have a "transparent" door but won't include locks, alarms, or displays
- they must utilize 1 airflow tech: gravity convection, mechanical convection, or dual convection
- gravity convection: there are no fans or anything that moves the air; it follows the law of physics (heat rises and cool air falls); will have less temperature uniformity but will have less drying over time
- mechanical convection: aka forced air; uses an integrated fan to move air inside the chamber; has a very even temperature distribution across the chamber
- dual convection: combines both gravity and mechanical convection; the user decides the mode that is best for their experiment

Conclusions: Testing has shown that our prototype meets the temp and humidity requirements but we were not able to test CO₂. Our prototype utilizes the gravity convection method since there is no fan. We will need to keep our eye on making sure there is an even temperature across the box but being as it much smaller than a standard incubator we should be ok.



2/10/22- Micro-CO2-Incubator for Use on a Microscope

Bella Raykowski - Feb 10, 2022, 8:56 PM CST

Title: Micro CO2 Incubator for use on a Microscope

Date: 2/10/22

Content by: Bella Raykowski

Goal: Understand how this design works and pull ideas from it for our design

Content:

- The incubator consists of 3 toroidal rings anodized with a black aluminum-oxide film and a 2-turn canthal wire wound around the middle ring that produces heat.
- The top ring fits over the middle ring, leaving open an inner circular gas duct and a narrow slit all along the inner surface of the ring just above the side of the culture dish.
- A polyvinylchloride (PVC) support ring with a metal top fits around the incubator so that thermistors attached to small magnets can be placed in or around the incubator.
- The PVC insulating ring under the incubator prevents heat loss to the object holder of the microscope.
- Between the center and side of the culture dish the gas can be used to maintain the partial pressure of gasses in the culture medium.
- By directing a suitable gas mixture at a flow rate of 0.5-2.0 l/min over the oil layer, the pH of a bicarbonate-buffered medium and its partial O₂ pressure can be maintained.

Conclusion: We could try leaving an empty space where we pump the CO₂ in at the desired concentration of 5%

Citation:

Can Ince, Dirk L. Ypey, Martina M.C. Diesselhoff-Den Dulk, Jacques A.M. Visser, Arie De Vos, Ralph Van Furth, Micro-CO₂-incubator for use on a microscope, Journal of Immunological Methods, Volume 60, Issues 1–2, 1983, Pages 269-275, ISSN 0022-1759, [https://doi.org/10.1016/0022-1759\(83\)90354-X](https://doi.org/10.1016/0022-1759(83)90354-X).



5/4/2022 Ibidi Stage Top Incubator

Bella Raykowski - May 04, 2022, 11:12 AM CDT

Title: Ibidi Stage Top Incubator

Date: 05/04/2022

Content by: Bella

Goals: To document a product that is direct competition to our design

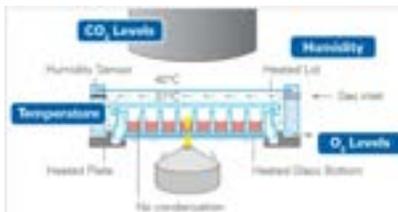
Content:



- this is a stage top incubator that works with an inverted microscope and has CO₂ control
- has a constant high relative humidity by humidifying the gas mixture before it enters the incubator



- there are 2 systems available: one for a slide/dish and one for well plates



- the lid is heated which prevents condensation in order to not intervene with the microscope optics
- this creates a temp gradient from top to bottom which also ensures a constant temp across the box

Conclusions: This incubator has a lot of similar aspects to ours but is very expensive. We could utilize the heated lid design in our prototype in order to prevent condensation

Link: <https://ibidi.com/stage-top-incubators/232-ibidi-stage-top-incubation-system-multi-well-plates-k-frame-co2.html>



9/21/22: Two Ways to Count Cells in ImageJ

Bella Raykowski - Sep 22, 2022, 11:33 AM CDT

Title: Two Ways to Count Cells in ImageJ

Date: 9/21/22

Content by: Bella Raykowski

Goal: Gather information on how we will be able to quantify the cell growth/death over the course of a week

Content:

- Manuel cell counting and marking

- this method has the user click to mark each cell manually while the computer totals the clicks and allows you to mark up to 4 groups of cells
- you need to download both ImageJ and get the cell counter plugin
- this method only works on single images, not stacks but the color of the image does not matter
- select plugins -> 1 analysis -> cell counter
- to count the cells, click the type in order to group them, and then begin clicking on cells in the image
- when finished, click results in order to view the total of each cell type
- you can export data into excel and then take a screenshot of the image with the clicked cells

- Automated Counting of Single Color Images

- images must be converted to greyscale before proceeding
- image -> adjust -> threshold (ctrl + shift + T) to highlight all the structures you need counted
- to reduce noise: process -> subtract background
- if you have cells overlapping: process -> binary -> watershed can sometimes cut them apart
- to count: analyze -> analyze particles; you can adjust size which will affect what size particles are counted
- circularity will exclude particles based on their roundness; to include everything keep: 0.00-1.00 (1.00 is a perfect circle and 0.00 is a straight line)
- "Show" will outline and label all the particles the program has counted

Conclusion: Ideally, we would use automated cell counting in order to reduce manual labor since we will be imaging both flasks every day for 5 or 7 days. We will need to determine the size of the image we want to analyze.

Citation: Labno, C. (n.d.). Two Ways to Count Cells with ImageJ. University of Chicago .


Two Ways to Count Cells with ImageJ

Figuring out how many cells are in an image is a common task in image analysis. There are several ways to go about this, some more involved than others. These instructions cover two very basic ways to get cell counts, one manual and one automated. The automated version also allows other information about each cell, such as perimeter, area and/or diameter, to be read out at the same time.

Manual Cell Counting and Marking (plugin required)

This set of instructions allows you to count cells by clicking on the cell image. Each click marks the cell with a colored square and adds the cell to a tally sheet. You can mark up to four different groups of cells, and each group is listed separately and marked with a different color square.


1) First, you must install the Cell Counter plugin, which is available on the microscopcy server under ImageJ → plugins → I analyze. To install the plugin, copy the entire "I analyze" folder into the plugins folder within the ImageJ folder on your computer. The manual to count images after plugin installation is in the I analyze folder containing the Cell Counter plugin. It appears under the Plugins menu.



2) Open the image you want to count. Cell counter only works on single images, not stacks. You can use Image → Stack → Split to Image to convert a 17 stack of 16 to single .tif files.

It does not matter if the image is grayscale, single-color or multiple colors. However, if your image is in grayscale you can fail because it will say "0 bit" or "1 bit" at the top, which is a color image, so I kept "RGB" and you will see your colored squares to be in color, you must convert the image to an RGB color image with Image → Type → RGB color. Otherwise ImageJ will support the counter plugin, but the squares are white or black, so it's hard to distinguish between types.

3) Select Plugins → I analyze → Cell Counter or Plugins → Cell Counter. Two new windows will open, a counter window with your image on top of a row of buttons, and a results window where cells will tally.



4) To begin counting, click one of the buttons at the bottom of the counter window. Then click directly on a cell that you wish to count. A white square will be

[Download](#)

Microsoft_Word_-_cell_counting_automated_and_manual.doc.pdf (424 kB)



9/22/22: Methods to Estimate Cell Confluency

Bella Raykowski - Sep 22, 2022, 11:57 AM

Title: Methods to Estimate Cell Confluency

Date: 9/22/2022

Content by: Bella Raykowski

Goal: Further research on how we can quantify cell viability

Content:

- confluency: the percentage of the growth medium area covered by adherent cells

- Image J

- in order to follow cell proliferation over time, it is important to always select the same field under the microscope (mark on flask which section was imaged)

- image the cells, load images into image J, transform to 8-bit greyscale

- to remove the background: Process -> Subtract Background -> adjust the rolling ball radius (it is recommended to be between 60-150 pixels)

- to reduce background noise/sharpen cell selection: Process -> Filters -> Median (a recommended radius of 5 to create a clean image)

- to select only cells: Image -> Adjust -> Threshold (this will highlight the cells)

- to obtain the area covered: Analyse -> Area

- using the square tool, select the desired image area, then Analyse -> tool -> ROI manager -> Add

- Click measure in the ROI box and it will output the %Area covered

- other methods of measuring confluency: visual estimation

- this method is efficient however it isn't quantitative therefore we will likely go with image J

Conclusion: Image J can be used for counting cells as well as calculating % the area covered (confluency) we will then be able to compare cell proliferation between the 2 incubators.

Citation: Cellculture. (2022, February 8). Methods to estimate cell confluency. CellCulture. Retrieved September 22, 2022, from

https://cellculture.altervista.org/confluency/doing_wp_cron=1663865712.2691159248352050781250#:~:text=You%20need%20area%20fraction%20that,the%20measure%20of%20the%20conflu

Bella Raykowski - Sep 22, 2022, 11:57 AM CDT



[Download](#)

Methods_to_estimate_Cell_Confluency__CellCulture.pdf (1.05 MB)



9/30/22: A potential method to induce hydrophobicity on glass surface while retaining its anti-reflective abilities

Bella Raykowski - Sep 30, 2022, 11:26 AM CDT

Title: A potential method to induce hydrophobicity on glass surfaces while retaining its anti-reflective abilities

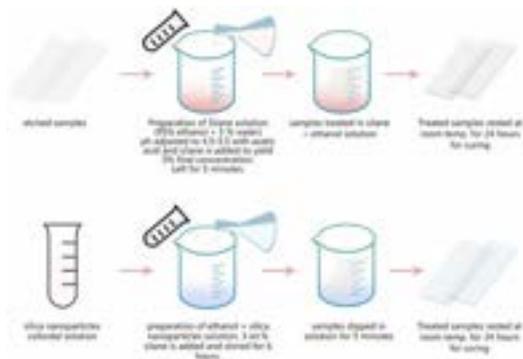
Date: 9/30/22

Content by: Bella Raykowski

Goal: Research a possible way to make glass hydrophobic in case the anti-fog spray negatively impacts the transparency of the cover glass

Content:

- Silane is a common chemical compound that can make glass hydrophobic
- The inorganic substrates such as glass react with silanes having a hydrolytically sensitive center and form covalent bonds through organic substitution hence altering the physical interaction of treated surfaces with water
- A solution of 95% ethanol and 5% water was prepared and then silane was added at left to cure for 5 min to allow for silanol formation
- glass slides were then placed into the solution for 5 min and then rinsed with 100% ethanol
- let the slides cure at room temperature for 24 hrs
- silica nanoparticles were made from sodium silicate, 3% silane, and ethanol which is stirred for 6 hrs
- Samples were placed in the solution for 5 min and left at room temperature for 24 h for curing.



- the samples should then be hydrophobic and able to repel water droplets

Conclusion: this is a possible method that can be used to treat our glass that won't negatively impact the cells, and hopefully won't impact the optical elements

Citation: Muhammad Basit Ansari, Ali Dad Chandio, Syed Bilal Hasan Rizvi, Shabbir Madad, Waqas Salman, A potential method to induce hydrophobicity on glass surface while retaining its anti-reflective abilities, Optik, Volume 257, 2022, 168866, ISSN 0030-4026, <https://doi.org/10.1016/j.ijleo.2022.168866>.



[Download](#)

A potential method to induce hydrophobicity on glass surface while retaining its anti-reflective abilities Elsevier Enhanced Reader.pdf (5.09 MB)



11/14/22: O2 plasma/PDMS silane deposition

Bella Raykowski - Nov 14, 2022, 11:44 AM CST

Title: O2 plasma and PDMS silane deposition on the glass to induce hydrophobicity

Date: 11/14/22

Goal: find a possible way to combat the condensation/fog formation on our glass slides

Content:

- in my research lab (the Beebe lab) I use a protocol that involves O2 plasma and PDMS silane deposition in order to create hydrophobic glass chambers that are then patterned for cell culture

- you first treat the whole chamber through O2 plasma treatment and then thermally treat the chamber with silane in order to induce hydrophobicity

- in order to get hydrophilic spots on the chamber, we then treated the chamber again with O2 plasma this time with a mask that left only desired areas exposed

- The treatment of oxygen plasma on PDMS introduces polar functional groups which are mainly the silanol group (SiOH). This group changes the surface properties of PDMS from being hydrophobic to hydrophilic

- I took a sample glass slide to my lab to test this protocol for our device, however the glass slide was too large for the O2 plasma deposition chamber

Conclusion: this could have been a very good option for creating hydrophobic glass and can be revisited if we find a larger O2 plasma chamber but that is unlikely



11/14/22: Preparation of Transparent Superhydrophobic Glass slides

Bella Raykowski - Nov 14, 2022, 12:53 PM CST

Title: Preparation of Transparent Superhydrophobic glass slides

Date: 11/14/22

Goal: Try to find a new way to prevent condensation

Content:

- The challenge of creating surface roughness that creates a superhydrophobic surface is that hydrophobicity and transparency are two opposing properties
- Transparency is maintained when the microscopic structures are not greater than 100 nm
- A standard microscope glass slide was rinsed with deionized water, sonicated in ethanol, and then sonicated in water.
- It was then dried and placed in a UV–ozone cleaner for 15 min
- The slide was immersed in 10 mL of toluene to cover the entire surface of the glass. 95 μ L of methyl trichlorosilane and 0.25 mL of concentrated hydrochloric acid were added, cap, and stored at 4 °C for 3–5 h.
- A second slide was treated the same way with 0.35 mL of octadecyl trichlorosilane and 0.25 mL of concentrated hydrochloric acid and stored at 4 °C for 1.5 h.
- both slides were rinsed three times with toluene, ethanol, a 1:1 mixture of deionized water and ethanol, and deionized water, prior to drying in an oven at 100 °C for 5 min.
- Both reactions created a super-hydrophobic effect on the glass slides

Conclusion: this could possibly solve our problem, will examine the cost of these materials if the mini windshield wiper idea fails

Citation:

Preparation of Transparent Superhydrophobic Glass Slides: Demonstration of Surface Chemistry Characteristics, Jessica X. H. Wong and Hua-Zhong Yu, Journal of Chemical Education 2013 90 (9), 1203-1206, DOI: 10.1021/ed300809m

11/14/2022 12:55 PM - Preparation of Transparent Superhydrophobic Glass Slides: Demonstration of Surface Chemistry Characteristics | Journal of Chemical Education

CHEMICAL EDUCATION

DETAILS TO ISSUE

1 PREVIEW DEMONSTRATION ARTICLE

10/1/22

Preparation of Transparent Superhydrophobic Glass Slides: Demonstration of Surface Chemistry Characteristics

Jessica K. H. Wong and Hui-Ching Tsai

View Article Information

© Chemical Education 2022. All rights reserved.
Publication date: June 26, 2022
https://doi.org/10.1021/acs.jchemeduc.2c00000
Copyright © 2022 The American Chemical Society and Division of Chemical Education, Inc.
10.1021/acs.jchemeduc.2c00000

Article Views: 7039 | Abstracts: 50

Download PDF (3.65 MB)

Back | Home | Search

1/1

Download PDF

ACS Publications

[Download](#)

superhydrophobic_glass.pdf (3.65 MB)



11/14/22: Laplacian Filter to measure focus quality

Bella Raykowski - Nov 14, 2022, 1:19 PM CST

Title: Laplacian Filter

Date: 11/14/22

Goal: quantify the focus quality from our optic and anti-fog tests

Content:

- The Laplacian is a 2-D isotropic measure of the 2nd spatial derivative of an image and highlights regions of rapid intensity change (often used for edge detection)
- The Laplacian is applied to an image that has first been smoothed with a Gaussian smoothing filter to reduce its sensitivity to noise
- The operator takes a single gray-level image as input and produces another gray-level image as output.
- can be used in Matlab using the `imread()` function

```
% MATLAB code for
% edge detection using Laplacian Filter.
k=imread("logo.png");

% Convert rgb image to grayscale.
k1=rgb2gray(k);

% Convert into double format.
k1=double(k1);

% Define the Laplacian filter.
Laplacian=[0 1 0; 1 -4 1; 0 1 0];

% Convolve the image using Laplacian Filter
k2=conv2(k1, Laplacian, 'same');

% Display the image.
imshow(k1, []);
imshow(abs(k2, []));
```

Conclusion: we could use this Matlab code to quantify our images

Links:

<https://homepages.inf.ed.ac.uk/rbf/HIPR2/log.htm>

<https://www.geeksforgeeks.org/laplacian-filter-using-matlab/>



10/11/22: Fisherbrand Microscope Slides

Bella Raykowski - Oct 11, 2022, 11:21 AM CDT

Title: Fisherbrand Extra Thick Microscope Slides

Date: 10/11/22

Content by: Bella Raykowski

Goal: research protocols/materials that could either help with our condensation issue or compete against our solution

Content:

- Fisherbrand has these slides available and they are 20% thicker than standard slides
- they are made of clear, corrosion-resistant glass and are precleaned with ground edges



- they come in packs of 144 for \$159.40

- size: 76.2 x 38.1 x 1.2 mm

Conclusion: this item would most likely compete with ours due to the price not making it feasible to include in our design

Link: <https://www.fishersci.com/shop/products/fisherbrand-extra-thick-microscope-slides-1/22267005>

Comments

Amit Nimunkar

Dec 10, 2022, 2:26 PM CST

Please make comments on how this ties in with your project goals.

Bella Raykowski - Dec 10, 2022, 7:11 PM CST

The goal of our project is to create a low-cost incubator. These glass slides could be used as the transparent cover pieces for our prototype however they are outside of the budget. We aim to create something similar but at a much lower cost.



3/1/22- Math calculations for heat transfer

Bella Raykowski - Mar 01, 2022, 11:16 PM CST

Title: Math calculations for heat transfer

Date: 3/1/22

Content by: Bella Raykowski

Content:

- see attached file

Conclusion: We can use Newton's Law of Cooling to determine the heat transfer out of the copper tubing

Bella Raykowski - Mar 01, 2022, 11:16 PM CST



[Download](#)

heat_transfer_math.pdf (3.6 MB)



4/26/2022 Solenoid Valve

Bella Raykowski - May 03, 2022, 3:02 PM CDT

Title: Solenoid Valve research

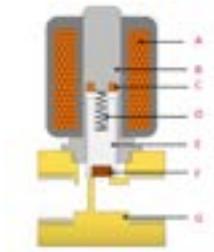
Date: 04/26/2022

Content by: Bella

Goals: To research how a solenoid valve works since our DC motor broke

Content:

- A solenoid is an electric coil that has a plunger in the center that can block the flow of gas and liquids



- A: an electromagnetically inductive coil that moves the plunger
- C: the shading ring which prevents/limits the vibrations from the AC coils
- D: the spring that must be overcome in order to move the plunger
- E: the plunger that does the actual blocking of flow
- F: the seal that prevents leakage when closed
- this valve type can be used in both high and low pressures as well as small and large flow rates
- a 2-way solenoid valve (what we would use) allows the flow into and then out of the valve



- a normally closed (NC) solenoid valve (what we would use) is closed until a current is sent to the coil (A) in order to move the plunger (E)
- we would need to code the circuitry to open and close very quickly
- Direct-acting: typically used in small flow rate setups because the max pressure and flow are related to the tubing diameter and the magnetic force of the valve
- they have no min pressure therefore their range is 0 bar - whatever the max allowed is
- Indirect-acting: uses the pressure differential over the ports in order to open and close the valve and therefore requires a min pressure ~0.5 bar
- can withstand a large flow rate
- semi-direct-acting: combines direct and indirect; can work at 0 bar but still handle high flow rates

Conclusions/action items: Finances pertaining, I think that a semi-direct-acting solenoid would work the best because it seems to be the best of both worlds but I don't think we will have a high flow rate so we could get away with using a direct one. Will now need to look into the cost of this type of valve and if it will fit in our \$100 budget.

Citation: <https://tameson.com/solenoid-valve-types.html>

Solenoid Valves Overview & selection guide
TAMESON

How does a solenoid valve work?

A solenoid valve is an electromechanical valve that is actuated by an electric current. It consists of a coil of wire (the solenoid) and a plunger (the valve). When the coil is energized, it creates a magnetic field that pulls the plunger down, opening the valve. When the coil is de-energized, the plunger returns to its original position, closing the valve.

Solenoid valves are used in a wide range of applications, from simple on/off control to complex sequencing. They are available in a variety of sizes, materials, and configurations to meet your specific needs.

Circuit functions of solenoid valves

Solenoid valves can be used in a variety of circuit configurations. The most common are:

- Normally Closed (NC):** The valve is closed when the coil is de-energized and opens when the coil is energized.
- Normally Open (NO):** The valve is open when the coil is de-energized and closes when the coil is energized.
- Double Acting:** The valve can be opened or closed by energizing the coil in either direction.

3-way solenoid valve

A 3-way solenoid valve has three ports: one for the inlet, one for the outlet, and one for the return. It can be used to control the flow of fluid in a system, such as a hydraulic or pneumatic circuit.

[Download](#)

Solenoid_Valve_-_How_They_Work___Tameson.com.pdf (1.05 MB)



4/26/2022 Fog Resistant Glass

Bella Raykowski - May 03, 2022, 9:06 PM CDT

Title: Fog Resistant glass

Date: 04/26/2022

Content by: Bella

Goals: To research possible fog-resistant glass that could be used in the prototype

Content:

- we had an issue with the glass paneling fogging up and condensation impairing the optics; to combat this we attempted to use a waterproofing spray however we ended up making the glass translucent instead of transparent
- MIT has developed an anti-fogging, glare-free, self-cleaning glass made out of nanotextures
- it is covered with microscopic conical indents with the intent that it stops light refracting on the surface, keeps condensation from forming, bounces water droplets off the surface which draws dust away
- it is fabricated with several fine layers with one of those layers being photo-resistant

Conclusion: if we can purchase this glass and it is within our \$100 budget then it could provide a really good option for our fogging problem while maintaining the optics of the microscope

Citation: Starr, Michelle. "MIT Creates Anti-Fogging, Glare-Free, Self-Cleaning Glass." CNET, CNET, 11 May 2012, <https://www.cnet.com/science/mit-creates-anti-fogging-glare-free-self-cleaning-glass/>.

Bella Raykowski - May 03, 2022, 8:59 PM CDT



[Download](#)

MIT_creates_anti-fogging_glare-free_self-cleaning_glass.pdf (1.63 MB)



4/26/2022 Fog Resistant Spray

Bella Raykowski - May 03, 2022, 9:33 PM CDT

Title: Fog Resistant Spray

Date: 4/26/2022

Content by: Bella

Goals: To research possible fog-resistant glass that could be used in the prototype

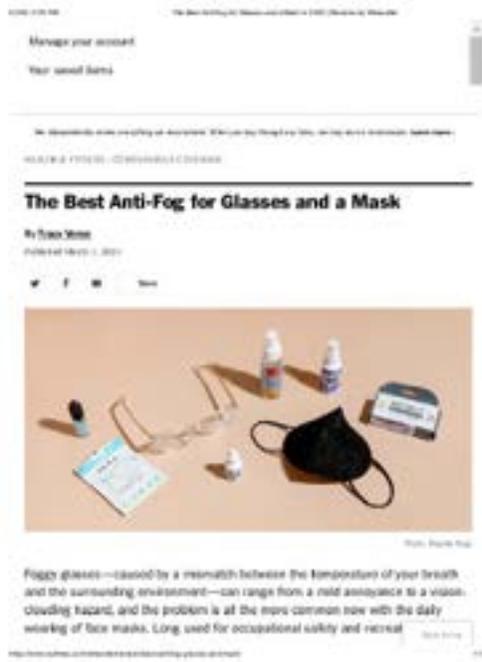
Content:

- common anti-fog treatments exist such as balms, drops, sprays, and wipes which work to repel fog
- New York Times tested 3 anti-fog drops, 2 anti-fog sprays, and 1 anti-fog wipe
- They found that Ultra Clarity's Defog It drops to be the most effective although it does require reapplication and can leave streaks
- it is applied by dropping the solution onto the lens and then using the wipe to spread it evenly across the glass
- this product is \$16 on amazon and is therefore within our budget; can be used up to 100 times



Conclusions: This could be a potential option for fog proofing our glass however it will likely need to be applied right before imaging and testing must be done in order to ensure that any streaks won't interfere with the microscope optics.

Citation: "The Best Anti-Fog for Glasses and a Mask." The New York Times, The New York Times, 1 Mar. 2021, <https://www.nytimes.com/wirecutter/reviews/best-anti-fog-glasses-and-mask/>.



[Download](#)

The_Best_Anti-Fog_for_Glasses_and_a_Mask_in_2022_Reviews_by_Wirecutter.pdf (8.92 MB)



3/25/2022 Optical Testing Protocol

Bella Raykowski - May 03, 2022, 12:56 PM CDT

Title: Optical Testing Protocol Results

Date: 03/25/2022

Content by: Bella

Present: Bella and Maya

Goals: To complete the optical testing by taking images with and without the glass of our prototype

Content:

See attached file.

Conclusions/action items: Now we must analyze these images using ImageJ in order to conclude whether or not there is a significant difference between the quality of the image taken with the glass compared to without. This will determine whether our glass sheet interferes with the optics of the microscope.

Bella Raykowski - May 03, 2022, 12:56 PM CDT

Optical Testing - Prior to and After Installation

Introduction
 Name of Tester: Bella Raykowski
 Date of Test Performance: 03/25/2022
 Site of Test Performance: ECE 3002

Objectives
 The team will use High Transmittance Liquid Polarizers to determine which best matches the optical properties of each polarizer. Each Polarizer has a pass percentage of 75%, a block percentage of 1%, and a corresponding pass-angle of 0.0146 (rad). The team has researched the high transmittance polarizers and determined an 80/20 and the team is 1/2/22. The team will determine through visual imaging, either by observation via camera or light microscope, the characteristics of the objects and whether 50% transmittance is acceptable.

Step	Process	Verification/Validation	Pass/Fail	is Rank of Tester
1	Place one polarizer over the complete slide 1.2. Prepare the microscope for use. Place results on test paper between the (polarizer of High Transmittance Liquid Polarizer) and place under the microscope stage.	<input checked="" type="checkbox"/> verified Comments:	Pass	97/100
2	Adjust the optical components of the microscope to best clarify based on observation. Rotate the test object paper & centered under the microscope lens. Take an image of when it is placed under the microscope.	<input checked="" type="checkbox"/> verified Comments:	Pass	97/100
3	Repeat steps 1-2 without the polarizer on slide. Record resulting the test object for paper.	<input checked="" type="checkbox"/> verified Comments:	Pass	97/100
4	Repeat 3 both repeated, after this procedure the slide. The team members will compare the two images and make a 1-10 based on the quality. The image with the higher rank quality will be the determined. Record the image in recommendations.	<input checked="" type="checkbox"/> verified Comments: Participants indicated that the image without the polarizer was clear and had a higher rank quality.	Pass	97/100

[Download](#)

Maya_Bella_Optical_Testing_-_Google_Docs.pdf (67.4 kB)



3/25/2022 Optical Testing Images

Bella Raykowski - May 03, 2022, 1:04 PM CDT

Title: Optical Testing Images

Date: 03/24/2022

Content by: Bella

Present: Bella and Maya

Goals: To document the images taken by the microscope to for optical testing

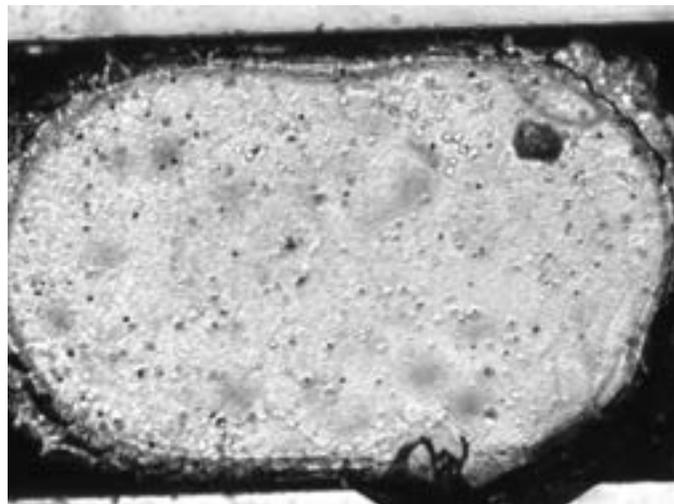
Content:

Bella took the images and Maya will analyze them using ImageJ

See attached files.

Conclusions/action items: Next is to analyze the images using ImageJ and conclude whether or not the glass impacts the microscope focus quality.


Bella Raykowski - May 03, 2022, 1:05 PM CDT



[Download](#)

test_2_with_glass.jpg (777 kB)

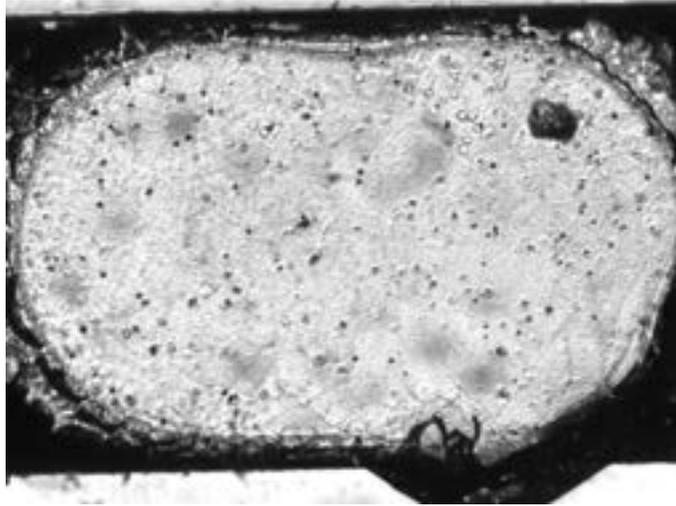Bella Raykowski - May 03, 2022, 1:05 PM CDT



[Download](#)

test_2_without_glass.jpg (824 kB)

Bella Raykowski - May 03, 2022, 1:05 PM CDT



[Download](#)

test_with_sheet.jpg (178 kB)



[Download](#)

test_without_sheet.jpg (190 kB)



4/26/2022 Recovery Testing

Bella Raykowski - May 03, 2022, 2:38 PM CDT

Title: Recovery Testing Results

Date: 04/26/2022

Content by: Bella, Maya, Katie

Present: Whole Team

Goals: To record the results from recovery testing (minus CO2)

Content:

See attached file.

Conclusions/action items: Using this data we can now generate graphs and figures for our final deliverables in order to show how temperature and humidity recover after the box has been opened. We found that it will take about 3 minutes for the box to return to the desired conditions.

Bella Raykowski - May 03, 2022, 2:39 PM CDT

Recovery Test Protocol Test 1

Introduction:
 Name of Tester: Maya & Katie
 Color of Test Pad: Orange 04/26/2022
 Size of Test Pad: Orange 10x10

Regulations:
 The team will test the recovery time of the incubator after it has been opened by timing how long it takes for the incubator to return to performance conditions (27°C, 50% RH, and 40% humidity). The standard recovery time should not exceed three minutes after a 30 second exposure to the ambient environment.

Steps	Procedure	Verifications/Observation	Pass/Fail	Tester Initials
1	Set up the incubator for normal use. Record the temperature in the incubator at steady state (before the contact begins) (27°C, 50% RH, and 40% humidity).	☑ success Comments: 27.0°C, 50.2% RH	Pass	MCMBT
2	Close the incubator for 30 seconds. After 30 seconds, verify that the incubator is working.	☑ success Comments:	Pass	MCMBT
3	Record internal conditions in the incubator after 10, 20, and 30 seconds after opening the incubator. Verify that the internal conditions have returned to the normal conditions specified above.	☑ success Comments: 27.7°C, 50% RH	Pass	MCMBT
4	Close the incubator. Verify that the incubator has not exceeded 3 minutes after a 30 second exposure to the ambient environment. Record the time it took to return back to normal conditions in the comments.	☑ success Comments: It took a little over 3 minutes to recover from the temperature and humidity.	Pass	MCMBT

[Download](#)

Maya_Katie_Bella_Recovery_Testing_-_Google_Docs.pdf (77.4 kB)



5/3/2022 Cell Culture Protocol

Bella Raykowski - May 03, 2022, 12:40 PM CDT

Title: Cell Culture protocol

Date: 05/03/2022

Content by: Bella

Present: Bella

Goals: To create a preliminary protocol for how to culture cells for next semester

Content:

See attached file.

Conclusions/action items: Begin cell testing wherever possible next semester. Help other areas of the project so they can get to the testing stage and then lead that. We will need to discuss with Dr. P what types of cells we will be using, the type of media they need, what size well plate, and if the 3 stains I have listed will work/can we get them.

Bella Raykowski - May 03, 2022, 12:41 PM CDT



[Download](#)

Cell_Culture_Protocol_-_Google_Docs.pdf (80.8 kB)



5/3/2022 Cell Staining Testing Protocol

Bella Raykowski - May 03, 2022, 12:44 PM CDT

Title: Cell Staining Testing Protocol Template

Date: 05/03/2022

Content by: Bella

Present: Bella

Goals: To create a preliminary testing protocol about how to test the cell viability of our prototype vs the standard incubator

Content:

See attached file.

Conclusions/action items: Begin testing wherever possible next semester. We will need to talk to Dr. P about being able to get the dyes I have mentioned and whether they will be included in the \$100 project budget. If not I may be able to get a small sample from my lab since we do this type of staining often. This test will require someone to go into the lab every day and change the media, stain a well, and image the cells.

Bella Raykowski - May 03, 2022, 12:44 PM CDT

Internal Environment - Temperature and Humidity Sensor Test Protocol

Introduction:
 Name of Tester:
 Date of Test Performance:
 Site of Test Performance:

Explanation:
 The team will be employing a standard incubator to quantify the live vs dead cells inside in adherence. The prototype will require cell viability compared to a standard incubator. The images of the cells will be taken using the Nikon scope in the bioengineering lab. The control will be the seed plate that is cultured in the standard incubator in order to provide a baseline for comparison. The prototype will be cultured in the incubator for a week. Another variable will be cultured inside the prototype at the same time as the control under the control of a single, three-day, culture (SA) and prototyping (P) will be used to 1-2 weeks per day to obtain the results of the cells, and used with a microscope (using image 1). The team will be able to quantify the ratio of live vs dead cells. Finally, to compare the 2 plates, and look for differences in the ratio of the work. Tests will be considered successful if there is no significant difference between the live vs dead cell ratio between the control and the prototype.

Stage	Protocol	Verification/Validation	Pass/Fail	Location of Tester
1	Day 0: verify cells traced from the incubator the prototype	<input type="checkbox"/> verified Comments:		
2	Day 1: verify cells traced from the incubator the prototype	<input type="checkbox"/> verified Comments:		
3	Day 2: verify cells traced from the incubator the prototype	<input type="checkbox"/> verified Comments:		
4	Day 3: verify cells traced from the incubator the prototype	<input type="checkbox"/> verified Comments:		
5	Day 4: verify cells traced from the incubator the prototype	<input type="checkbox"/> verified Comments:		
6	Day 5: verify cells traced from the incubator the prototype	<input type="checkbox"/> verified Comments:		
7	Day 6: verify cells traced from the incubator the prototype	<input type="checkbox"/> verified Comments:		

[Download](#)

Testing_Protocol_Cell_Viability_-_Google_Docs.pdf (60.5 kB)



5/3/2022 Full Testing Protocol (updated)

Bella Raykowski - May 03, 2022, 9:02 PM CDT

Title: Testing Protocol Template Revisions

Date: 05/03/2022

Content by: Bella

Goals: Update the testing protocol template in order to better reflect current and proposed tests

Content:

See attached file

Conclusions/action items: Continue testing wherever possible next semester and hopefully we will be able to do a week-long cell viability test.

Bella Raykowski - May 03, 2022, 9:03 PM CDT

General Environment - Temperature and Humidity Sensor Test Protocol

Introduction:
 Name of Tester:
 Date of Test Performance:
 Site of Test Performance:

Objectives:
 The team will be employing a sensor inside the incubator to measure the internal temperature. The measurements of the humidity and temperature will be obtained by an Arduino Uno R3. Before conducting the test, the team will need to make sure that the cells and the incubator are working correctly by calibrating the sensor and then confirming its accuracy on steady state and non-steady state dynamic inputs using a thermometer. To calibrate the sensor, the team will use a known volume of water in the Arduino Uno R3. Once the sensor is calibrated, its accuracy will be tested by first measuring the temperature and humidity of the working environment. To gauge if they are both working as expected, and then measuring its temperature and humidity against known temperatures. If correct, the team will measure the temperature inside the incubator with a thermometer and be correct. To keep the incubator completely sealed, the thermometer probe will be kept inside with the Arduino Uno R3 and not through the glass. The tests will be conducted in parallel if the sensor value is other (T) of the thermometer temperature.

Index	Procedure	Verification/Validation	Pass/Fail	Initials of Tester
1	Calibrate the sensor using a known volume of water in the Arduino Uno R3.	<input checked="" type="checkbox"/> Verified Comments:		
2	Test the accuracy of the humidity and temperature sensor by comparing the sensor and then confirming its accuracy on steady state and non-steady state dynamic inputs using a thermometer. To calibrate the sensor, the team will use a known volume of water in the Arduino Uno R3. Once the sensor is calibrated, its accuracy will be tested by first measuring the temperature and humidity of the working environment. To gauge if they are both working as expected, and then measuring its temperature and humidity against known temperatures. If correct, the team will measure the temperature inside the incubator with a thermometer and be correct. To keep the incubator completely sealed, the thermometer probe will be kept inside with the Arduino Uno R3 and not through the glass. The tests will be conducted in parallel if the sensor value is other (T) of the thermometer temperature.	<input checked="" type="checkbox"/> Verified Comments:		
3	Test on the incubator for correct operation and adjust the sensor inside the system.	<input checked="" type="checkbox"/> Verified Comments:		

[Download](#)

Testing_Protocols_Template_-_Google_Docs.pdf (119 kB)



9/23/22: Cell Passage 1

Bella Raykowski - Sep 23, 2022, 12:11 PM CDT

Title: Cell Passage 1

Date: 9/23/22

Content by: Bella Raykowski

Goal: Document the passage of the cells

Content:

- received the MC323E1 cells from Dr. Puccinelli in the teaching lab on 9/21
- cells appeared to be 80% confluent upon quick glance on the microscope, cells appeared slightly elongated and adhered to the bottom of the flask
- on 9/23 I passaged the cells into a new flask using 40% of the previous cells and threw away the remaining 60%
- once cells were in the new flask they appeared very round and floating in the media (they will adhere over time)
- media changes can be done once a week and we will monitor the cell proliferation over time and will passage them once they reach 80% confluency again
- we will begin standard incubator testing on Monday

Conclusion: Passaging went well and the cells are looking healthy



9/23/22: Cell Viability Testing Protocol (Confluency)

Bella Raykowski - Sep 23, 2022, 12:21 PM CDT

Cell Viability Test Protocol

Introduction:
 Name of Tester:
 Name of Test Performance:
 Date of Test Performance:

Objectives:
 The team will be employing Image J software to quantify the percentage of area covered by the cells over time in order to quantify the cell proliferation. This software tool will be used to compare cell proliferation in the control incubator compared to the test tube. The images of the cells will be taken using the Nikon microscope (see Appendix A). The control will be the T25 flask that is cultured in the standard incubator in order to provide a baseline on appropriate cell death over the course of a week. Another T25 flask will be cultured under the prototype of the same time as the control over the course of a week. At the end of the test will be checked to ensure that the same method is being used. Using the ImageJ software tool, Image J, an image will be taken of the prototypical section, then the image will be loaded into Image J. The team will be able to quantify the percent of cell coverage and track cell confluency over the course of the week. Tests will be conducted and recorded if there is no significant difference between the confluency between the control and the prototype.

Step	Procedure	Verification/Validation	Pass/Fail	Initials of Tester
1	Step 1: Image section of the flask with ImageJ and ImageJ that will be used. Analyze at Image J and confirm if the percent coverage is similar between the control incubator and the test tube. Confirm that the software tool is being used for 1 result at a time.	<input type="checkbox"/> Verified Comments:		
2	Step 2: Image section. Analyze at Image J and confirm if the percent coverage is similar between the control incubator and the test tube. Confirm that the software tool is being used for 1 result at a time.	<input type="checkbox"/> Verified Comments:		
3	Step 3: Image section. Analyze at Image J and confirm if the percent coverage is similar between the control incubator and the test tube. Confirm that the software tool is being used for 1 result at a time.	<input type="checkbox"/> Verified Comments:		

[Download](#)

Cell_viability_testing_-_Google_Docs.pdf (70.9 kB)



9/30/22: Cells Week 2 check

Bella Raykowski - Sep 30, 2022, 11:35 AM CDT

Title: Cell Check Week 2

Date: 9/30/22

Content by: Bella Raykowski

Goal: Keep a record of how the cells are doing from week to week

Content:

- was unable to start control incubator cell testing this week due to scheduling issues; this does not delay the overall timeline of the project since we were starting this very early

- will hopefully start cell testing on Monday

- cells are still healthy and the media was changed on 9/30/22, next media change doesn't need to be until 10/7/22

Conclusion: Cell testing will start soon and the cells still look very healthy



10/3/22: Control Cell Confluency Test Day 0

Bella Raykowski - Oct 04, 2022, 2:27 PM CDT

Title: Control Cell Confluency Test Day 0

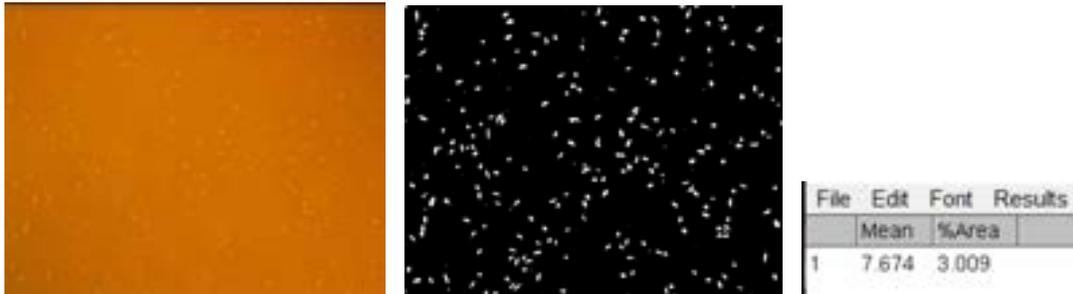
Date: 10/3/22

Content by: Bella Raykowski

Goal: keep a record of the control testing

Content:

- Using MC323E1 cells at passage number 18, cells were passaged at 4:30 pm on 10/3
- Conducted a cell count and found that 250,000 cells/mL and 1.25 million cells total
- 10% (~125,000 cells) were seeded into a new T25 flask and were allowed to settle for 3 hours in the incubator
- at 7:30 pm, the cells were imaged using the scope in the ECB teaching lab and then analyzed in ImageJ



- Left: image taken by the scope before analysis
- Middle: image after ImageJ analysis
- Right: data outputted by ImageJ

Conclusion: to start the test, the cells covered 3.009% of the flasks surface



10/4/22: Control Cell Confluency Test Day 1

Bella Raykowski - Oct 04, 2022, 2:58 PM CDT

Title: Control Cell Confluency Test Day 1

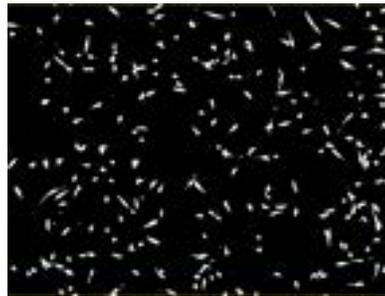
Date: 10/4/22

Content by: Bella Raykowski

Goal: keep a record throughout the control testing

Content:

- media on cells was changed at 2:30 pm, right before imaging



File	Edit	Font	Results
	Mean	%Area	
1	2.965	4.898	

- right: image taken by the Zeiss microscope

- middle: image after imageJ analysis

- left: results outputted by imageJ

Conclusion: there was a ~1.5% increase over 22 hours, will image again tomorrow



10/5/22: Control Cell Confluency Testing Day 2

Bella Raykowski - Oct 05, 2022, 5:48 PM CDT

Title: Control Cell Confluency Test Day 2

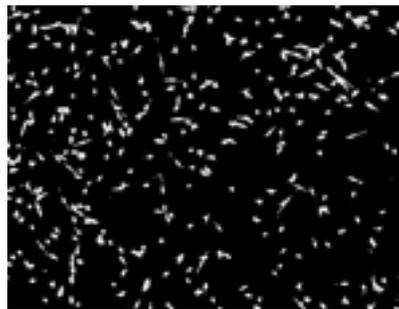
Date: 10/5/22

Content by: Bella Raykowski

Goal: keep record of cell testing

Content:

- media on cells was changed at 5:30 pm, right before imaging



File	Edit	Font	Results
	Mean	%Area	
1	15.749	6.176	

- right: image taken by the Zeiss microscope

- middle: image after ImageJ analysis

- left: results outputted by ImageJ

Conclusion: there was a ~1.5% increase over 27 hours, will image again tomorrow



10/6/22: Control Cell Confluency Test Day 3

Bella Raykowski - Oct 06, 2022, 11:47 AM CDT

Title: Control Cell Confluency Test Day 3

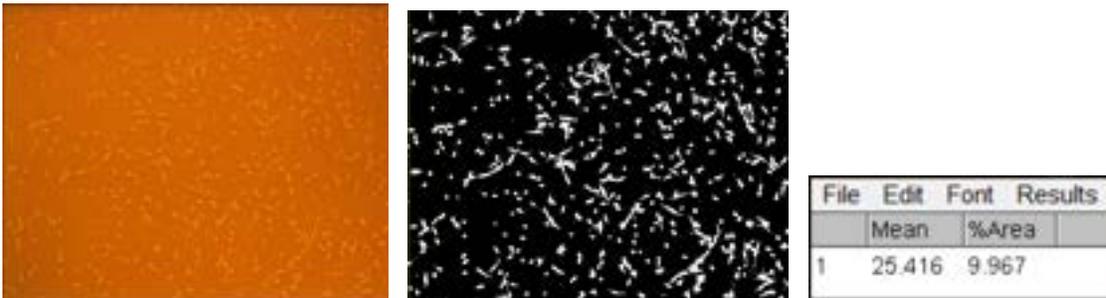
Date: 10/6/22

Content by: Bella Raykowski

Goal: keep a record of the control cell confluency testing

Content:

- the media on the cells was changed at 11:30 AM and were then imaged using the teaching lab scope



- right: image taken by the scope

- middle: image that was analyzed by ImageJ

- left: results out-putted by Image J

Conclusion: there was a significant increase since the last image, I expect that this trend will continue



10/7/22: Control Cell Confluency Test Day 4

Bella Raykowski - Oct 07, 2022, 3:08 PM CDT

Title: Control Cell Confluency Test Day 4

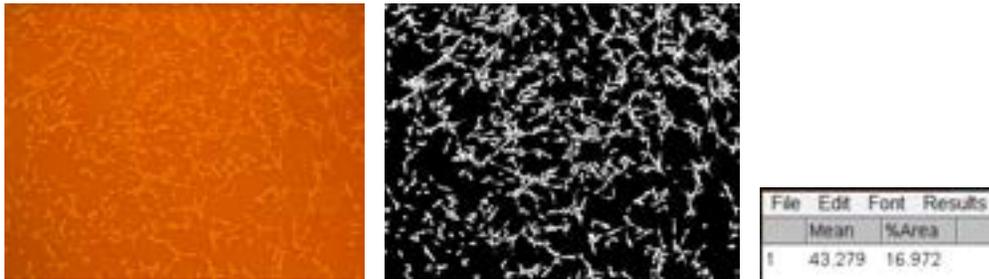
Date: 10/7/22

Content by: Bella Raykowski

Goal: keep a record throughout cell confluency testing

Content:

- media was changed on the cells at 3:00 pm and were then imaged



- left: image taken by the scope

- middle: image analyzed by ImageJ

- right: results that were outputted by Image J

Conclusion: we once again saw a large jump up in %area coverage, will measure again in 24 hrs



10/10/22: Control Cell Confluency Test Final Results

Bella Raykowski - Oct 10, 2022, 11:22 AM CDT


Title: Control Cell Confluency Test Final Results

Date: Bella Raykowski

Goal: Document the final results from the control group

Content:

Time (hours)	% Area Coverage
3	3.009
22	4.898
49	6.176 5:30 PM
68	9.967 11:30 AM
95.5	16.972 3:00 PM

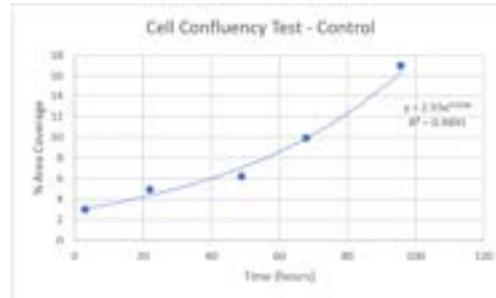

- the cells were housed in the standard device incubator in the teaching lab for the duration of the test
- before each imaging, the cells media was changed to ensure that no dead cells were calculated in the %area coverage
- images were taken roughly in the same spot each day, marks were made on the flask to ensure alignment
- from day 0 to day 4, %area coverage increased from 3 to 17%
- an exponential equation was applied to the graph, $y = 2.93e^{(0.018x)}$ with an R^2 of .9891
- this graph and equation will be the baseline in which the prototype is tested against

Conclusion: cells demonstrated a healthy proliferation rate over the 5 days and we now have a baseline to compare our incubator to



12/10/22: Updated Cell Viability Testing Protocol

Bella Raykowski - Dec 10, 2022, 7:15 PM CST

Cell Confluency Test Protocol

Introduction:
 Name of Tester:
 Date of Test Performance:
 Site of Test Performance:

Objectives:
 The main objective of this test is to quantify the percentage of cells covered by the cells over time in order to quantify cell proliferation. The objective is to compare cell proliferation in the control condition compared to the growth. The stages of the cell cycle are monitored, the cells are growing and dividing but the control was a 100% that has not reached the maximum number of cells in culture. An application of 100% cells over the course of a week. Another 100% that was cultured under the percentage over the course of a week. Using the data logs, an image was taken every 24 hours, and three images were loaded into ImageJ. The mean was able to quantify the percent of cell coverage and record cell confluency over the course of the week. This will be compared over a 100% where there is no significant difference between the conditions between the control and the percentage.

Step	Procedure	Test Results/Calculations	Pass/Fail	Quality of Image
1	Day 0: Using the cell count sheet the control percentage change (the cell number) and image is recorded. Images taken at 100% in duplicate at 100% and coverage. Record data in the control spreadsheet after each sampling.	<input type="checkbox"/> ImageJ Comments:		
2	Day 1: Repeat step 1 every 24 hours from start for the first in the control condition.	<input type="checkbox"/> ImageJ Comments:		
3	Day 0: Using the cell count sheet the percentage increase, change the cell number, and image is recorded. Images taken at 100% in duplicate at 100% and coverage. Record data in the percentage spreadsheet after each sampling.	<input type="checkbox"/> ImageJ Comments:		
4	Day 1: Repeat step 1 every 24 hours from start for the first in the percentage condition.	<input type="checkbox"/> ImageJ Comments:		
5	Final day the control and the percentage coverage will be compared. The percentage of the control and the percentage of the percentage will be compared.	<input type="checkbox"/> ImageJ Comments:		

[Download](#)

Updated - Cell_confluency_protocol - Google_Docs.pdf (76.6 kB)



12/10/22: Prototype Cell Confluency Test

Bella Raykowski - Dec 10, 2022, 7:34 PM CST

Title: Prototype Cell Confluency Test

Date: 12/10/22

Goal: To document the prototype cell confluency test images and results

Content:

- Using MC323E1 cells at passage number 21, cells were passaged at 9:00 am on 12/05
- Conducted a cell count and found that 4.25 million cells in total
- ~125,000 cells were seeded into a new T25 flask and were allowed to settle for 1 hour in the incubator
- at 10:00 am, the cells were imaged using the Zeiss microscope in the ECB teaching lab and then analyzed in ImageJ

t = 1 hr



t = 12 hr



t = 24 hr



t = 36 hr




t = 50 hr



t = 74 hr



Time	Prototype
1	1.571
12	1.837
24	2.555
36	2.38
50	2.14
74	1.58

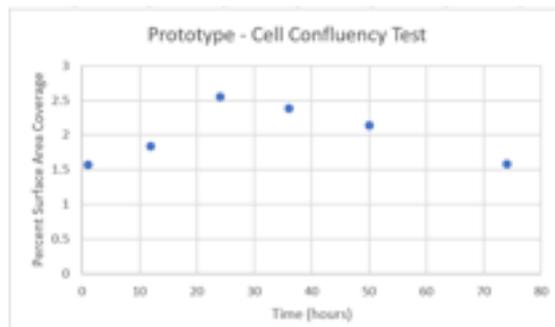

- the cells began to experience exponential growth but after 24 hours they began to experience a negative linear trend

Conclusion: the cells do not appear to be healthy/viable but will run a comparison with the control results



12/10/22: Cell Confluency Comparison

Bella Raykowski - Dec 10, 2022, 7:44 PM CST


Title: Cell Confluency Comparison

Date: 12/10/22

Goal: compare the results from both control and test confluency tests

Content:

Time	Control	Prototype
1		1.571
3	3.009	
12		1.837
21	4.898	
24		2.555
36		2.38
49	6.176	
50		2.14
68	9.967	
74		1.58
92	16.972	

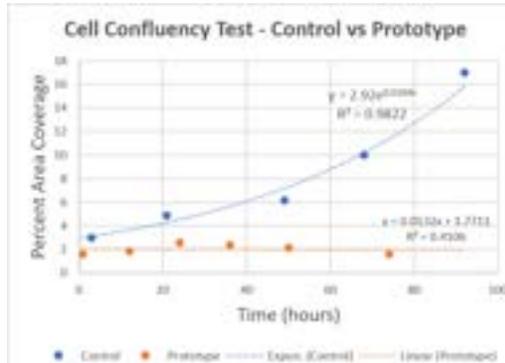

- the prototype incubator failed to keep the cells viable as demonstrated by the fact that the cells experienced next to no cell proliferation over the course of 74 hours

- it was later determined that the cells died due to an acidic environment that was caused by the lack of CO₂ in the incubator (the solenoid failed mid-experiment)

- another indication that the cells were in an acidic environment was when the cell media changed from pink to yellow in under 6 hours

- a color change is a normal indication of pH in cell culture but it usually only happens after a few days not a few hours

Conclusion: will need to revisit/perfect CO₂ input in order to provide an adequate environment for cells in order to maintain their viability.



10/19/22: Anti-Fog Testing

Bella Raykowski - Oct 19, 2022, 11:07 PM CDT

Title: Anti-fog testing

Date: 10/19/22

Content by: Bella Raykowski

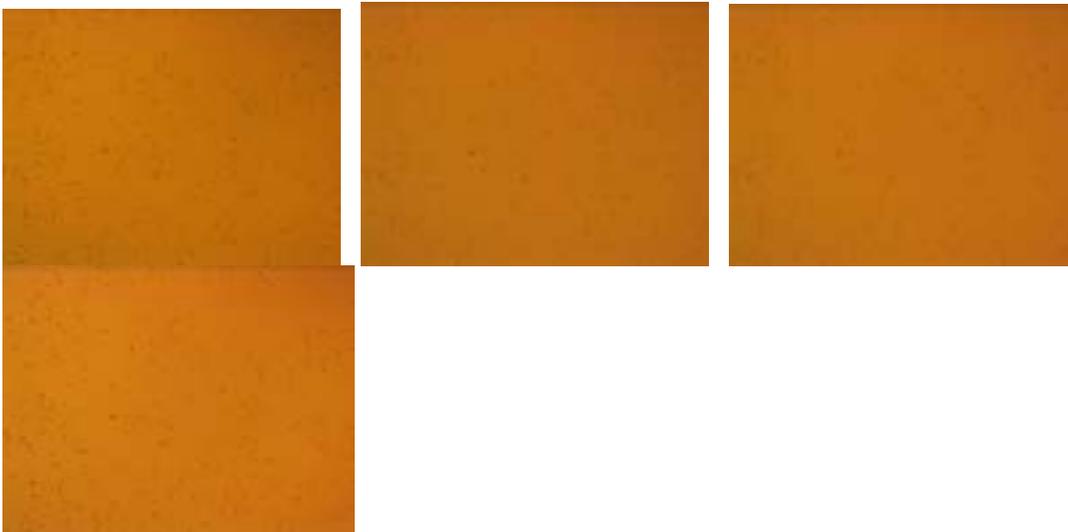
Goal: document the anti-fog testing process

Content:

- the prototype was set up on the Zeiss microscope in the team lab with the heated water pump and T25 flask of cells
- waited 10 minutes for the incubator to reach the desired temperature of 37° C
- focused the scope on the cells and imaged them every 10 minutes for 60 minutes, refocusing as necessary
- glass fogged over after 20 minutes therefore we ran the test for only 40
- control (flask of cells without the incubator):



- From left to right: 10 min, 20 min, 30 min, 40 min



- unsure why the image seemed to clear up at the 40 min mark, will need to run more tests

Conclusion: the anti-fog spray did not work as desired and will try applying 4 pumps instead of 2 next time, will analyze this data to get quantifiable results.



10/28/22: 4 pumps

Bella Raykowski - Nov 14, 2022, 11:22 AM CST

Title: Anti-fog test with 4 pumps of spray

Date: 10/28/22

Goal: Document the process of testing the effectiveness of our anti-fog spray

Content:

- applied 4 pumps of anti-fog spray to each inside piece of glass, allowed to sit for 5 minutes before wiping off with a Kemi wipe

Control 1



Control 2



Time = 0 min



Time = 10 min



Time = 20 min



Time = 30 min



Time = 40 min



Time = 50 min



Time = 60 min



Conclusion: Upon visual examination of the glass, one could see that condensation had formed after 10 minutes of running the system, and optics slowly deteriorated. 4 pumps are not enough to prevent the formation of condensation. Will quantify this data soon.



11/01/22: 8 pumps

Katie Day - Nov 18, 2022, 12:30 PM CST

Title: Anti-fog test with 8 pumps of spray

Date: 11/01/22

Goal: Document the process of testing the effectiveness of our anti-fog spray

Content:

- applied 4 pumps of anti-fog spray to each inside piece of glass, allowed to sit for 5 minutes before wiping off with a Kemi wipe

Control 1

Control 2

Time = 0 min



Time = 10 min

Time = 20 min

Time = 30 min



Time = 40 min

Time = 50 min

Time = 60 min



Conclusion: Upon visual examination of the glass, one could see that condensation had formed after 10 minutes of running the system, and optics slowly deteriorated. 8 pumps are not enough to prevent the formation of condensation. Will quantify this data soon.



11/02/22: 12 pumps

Bella Raykowski - Nov 14, 2022, 11:34 AM CST

Title: Anti-fog test with 12 pumps of spray

Date: 11/02/22

Goal: Document the process of testing the effectiveness of our anti-fog spray

Content:

- applied 4 pumps of anti-fog spray to each inside piece of glass, allowed to sit for 5 minutes before wiping off with a Kemi wipe

Control 1

Control 2

Time = 0 min



Time = 10 min

Time = 20 min

Time = 30 min



Time = 40 min

Time = 50 min

Time = 60 min



Conclusion: Upon visual examination of the glass, one could see that condensation had formed after 10 minutes of running the system, and optics slowly deteriorated. 12 pumps are not enough to prevent the formation of condensation. Will quantify this data soon.



12/10/22: MATLAB analysis of anti-fog testing

Bella Raykowski - Dec 10, 2022, 7:57 PM CST

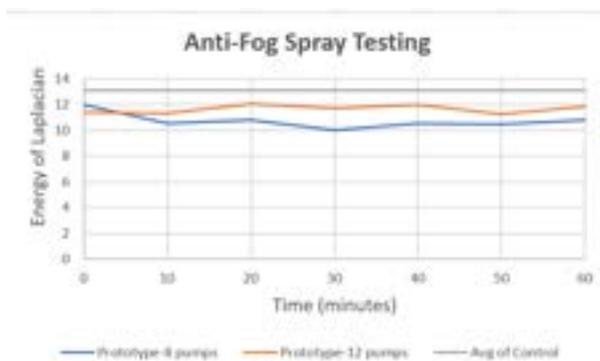
Title: MATLAB analysis of anti-fog testing

Date: 12/10/22

Goal: quantify the difference in optical quality over time while condensation forms

Content:

- the Energy of Laplacian of each image was measured in MATLAB
- this measures the intensity changes throughout the image; high energy indicates a clear image and low energy indicates a less clear image



- the above graph demonstrates how the 12 pumps had higher energy than that of the 8 pumps but still not as high as the control images
- the team could visibly see condensation quickly forming on the glass slides during both tests

Conclusion: the team decided that because of the condensation formation and low energy levels they would abandon the anti-fog spray and look to new methods to prevent/remove condensation



10/25/22: Optical Testing

Bella Raykowski - Oct 25, 2022, 11:03 AM CDT

Title: Optical Testing

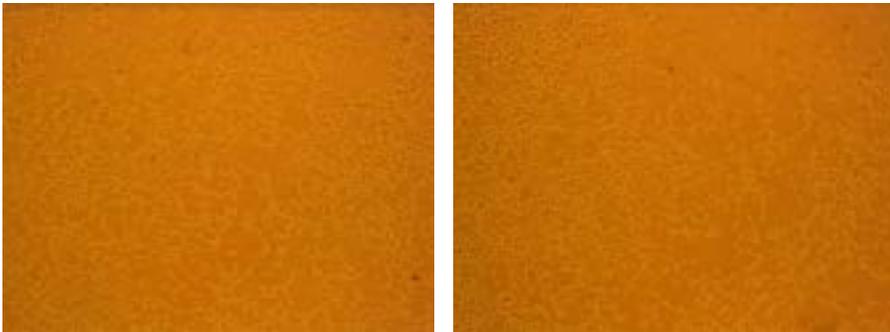
Date: 10/24/22

Content by: Bella Raykowski

Goal: document the optical testing process and images

Content:

- each glass slide was sprayed 3 times with the anti-fog spray to clean off any fingerprints and dust
- control: the T25 flask of cells was imaged by itself (not in prototype) twice, each time at a different location



- experiment: the T25 flask of cells was placed inside the prototype (no water/heating element was added) and was imaged twice, each time at a different location



Conclusion: we will now to ImageJ analysis to determine if the glass with spray affects the optics of the microscope



12/06/22: Optical Testing Matlab Analysis

Bella Raykowski - Dec 06, 2022, 11:41 AM CST

Title: MATLAB analysis of the optical testing images

Date: 12/06/22

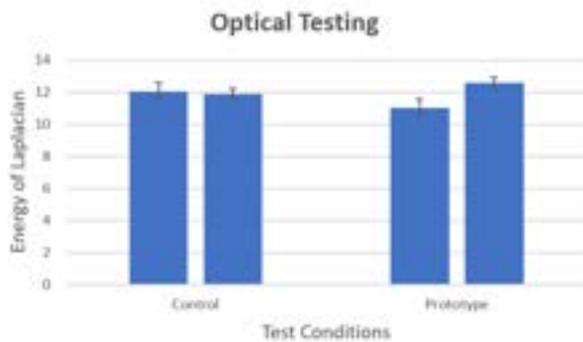
Goal: quantify the difference in image quality between the control and the prototype

Content:

- I used MATLAB to calculate the Energy of Laplacian for each greyscale version of the images
- I analyzed 2 control images and 2 prototype images
- I then ran a p-test to determine if there was any statistically significant difference between the 2 conditions
- the p-value = 0.8442 therefore there was not a statistical significant difference

Conclusion: the glass used in our prototype does not negatively impact the optical quality of the images

Bella Raykowski - Dec 10, 2022, 7:59 PM CST





03/01/2022 Lab Training

Bella Raykowski - Mar 01, 2022, 8:04 PM CST

Title: Training Documentation

Date: 03/01/2022

Content by: Bella Raykowski

Goal: Show proof of documentation of any lab training

Content:



This certifies that Bella Raykowski has completed training for the following course(s):

Expand All
Collapse All

Course	Assignment	Completion	Expiration
2020-21 HIPAA Privacy & Security Training	HIPAA Quiz	4/9/2021	
Biosafety 102: Bloodborne Pathogens for Laboratory and Research	Biosafety 102: Bloodborne Pathogens Safety in Research Quiz 2021	8/12/2021	
Biosafety Required Training	Biosafety Required Training Quiz	3/13/2021	

Data Last Imported: 03/01/2022 07:50 PM



This certifies that Bella Raykowski has completed training for the following course(s):

Expand All
Collapse All

Course	Assignment	Completion	Expiration
Chemical Safety: The OSHA Lab Standard	Final Quiz	3/26/2021	
Good Clinical Practice for Drug/Device Researchers	Good Clinical Practice	9/3/2021	9/2/2024
UW Social & Behavioral Course	Basic/Refresher Course - Human Subjects	9/3/2021	9/2/2024

Data Last Imported: 03/01/2022 07:50 PM

Conclusion: I have completed training for HIPPA Privacy and Security Training, Biosafety 102, Biosafety Required Training, Chemical Safety, Good Clinical Practice for Drug/Device Researchers, UW Social and Behavioral Course



11/11/22: Tong Lecture

Bella Raykowski - Nov 11, 2022, 12:36 PM CST

Title: How to evolve an entrepreneurial mindset for students and faculty

Date: 11/11/22

Speaker: Bonnie Bachman

Content:

- over 50% of 18-24-year-olds want to start their own business
- entrepreneurship is generally found in B-schools
- entrepreneurship is the backbone of the global economy and engineers play a critical role by addressing problems and creating solutions
- the key is using the entrepreneurial way of thinking so frequently that it has become a habit
- it is rare for entrepreneurship training to be offered to engineering faculty (it is also not included in the tenure process)
- the context both inside and outside the university is a crucial determinant of student views on entrepreneurship and startups
- universities are now starting to see themselves as players in the entrepreneurship arena but now they must develop new programs and bring in new faculty
- technology entrepreneurship office (TEO) is a new office to foster the entrepreneurship environment

Conclusion:

UW is making strides to be more entrepreneurship related focuses due to student interest (I am personally not interested)



2014/11/03-Entry guidelines

John Puccinelli - Sep 05, 2016, 1:18 PM CDT

Use this as a guide for every entry

- Every text entry of your notebook should have the **bold titles** below.
- Every page/entry should be **named starting with the date** of the entry's first creation/activity, subsequent material from future dates can be added later.

You can create a copy of the blank template by first opening the desired folder, clicking on "New", selecting "Copy Existing Page...", and then select "2014/11/03-Template")

Title: Descriptive title (i.e. Client Meeting)

Date: 9/5/2016

Content by: The one person who wrote the content

Present: Names of those present if more than just you (not necessary for individual work)

Goals: Establish clear goals for all text entries (meetings, individual work, etc.).

Content:

Contains clear and organized notes (also includes any references used)

Conclusions/action items:

Recap only the most significant findings and/or action items resulting from the entry.



Title:

Date:

Content by:

Present:

Goals:

Content:

Conclusions/action items: